THE DESIGN COLLECTION

General Catalogue

The Design Collection is not just a collection of interior products, but a big family with various selections for choice. From wide to narrow beam angles, from recessed to surface mounted and track applications, this collection provides it all with different color finishes and accessory combinations.

All in all, the design collection can meet all possible interior lighting requirements.

BIANCA COLLECTION



Minimalist-designed Bianca family has very flexible forms and accessories options to use the light as art and to produce the desired effect without glare.


DRIVERS ARE PROVIDED B TRIDONIC

ACU 200101 13W LED COB



Sandy Black 🛛 Sandy White

Matt Gold



Chrome

📓 Rose Gold


Color Temperature	Initial Lumen Output
3000K	83 lm/W
4000K	96 lm/W
Beam angle	CRI
12°	≥90
25°	
38°	
Operation Temperature	Rated life hours
-10°C~45°C	
0 0 10 0	50,000H
0 0 0 0	50,000H
LED Type	50,000H
LED Туре	Installation
LED Туре	Installation

ACU 200102 13W LED COB

Colors

Nickel





Color Temperature	Initial Lumen Output
3000K	83 lm/W
4000K	96 lm/W
Beam angle	CRI
12°	≥90
25°	
38°	
Operation Temperature	Rated life hours
-10°C~45°C	50,000H
LED Type	Installation
СОВ	Recessed
Cut-out	IP Rate
Ø72mm	IP40

Colors

Sandy Black	Sandy White	Chrome
Nickel	Matt Gold	📓 Rose Gold

ELARA COLLECTION



This product of Elara series has a functional aspect of an adjustable ability that allows this fixture to be directed to highlight the desired element of decor.

DRIVERS ARE PROVIDED B TRIDONIC


INDOOR LIGHTS - ELARA



Colors


ACU 200701 8W LED COB






Color Temperature	Initial Lumen Output
3000K	83 lm/W
4000К	96 lm/W
Beam angle	CRI
24°	≥90
36°	
Operation Temperature	Rated life hours
-10°C~45°C	50,000H
LED Type	Installation
СОВ	Recessed
Cut-out	IP Rate

INDOOR LIGHTS - ELARA

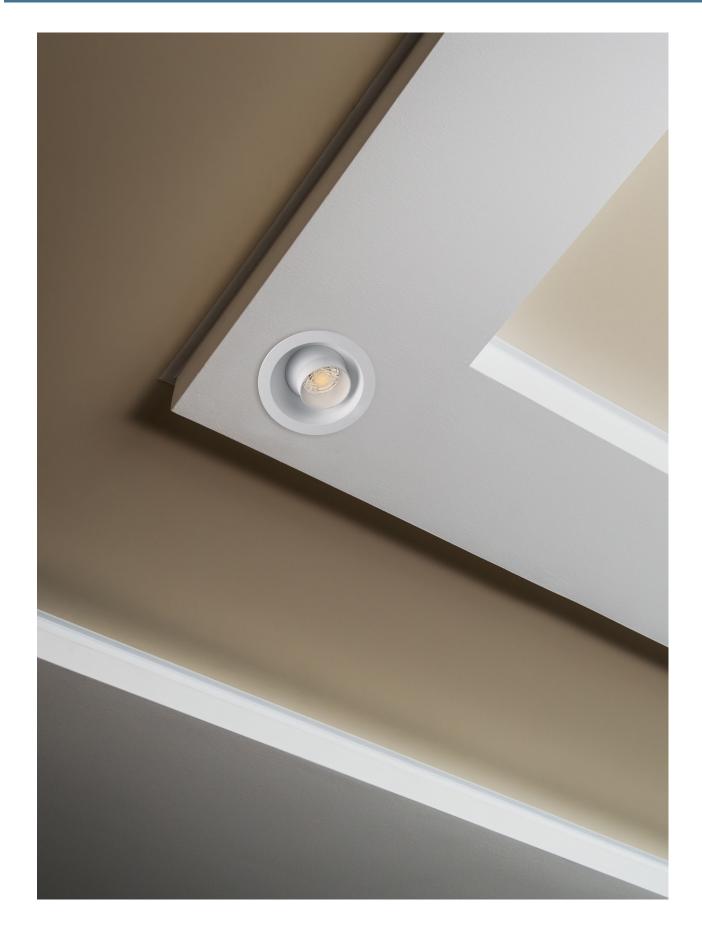

HELENE COLLECTION

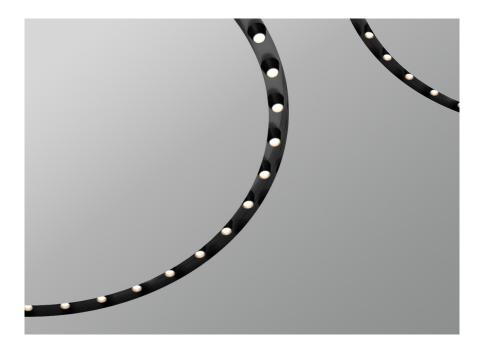

Helene benefits the space by adding a decorative element. It can be an excellent option to replace chandeliers.


DRIVERS ARE PROVIDED B TRIDONIC



INDOOR LIGHTS - HELENE

ACU 200801 12x2W LED COB






Color Temperature	Initial Lumen Output
3000K	75 lm/W
4000K	86 lm/W
Beam angle	CRI
12°	≥ 90
20°	
30°	
Operation Temperature	Rated life hours
Operation Temperature -10°C~45°C	Rated life hours 50,000H
· · ·	
· · ·	
-10°C~45°C	50,000Н
-10°C~45°C	50,000H
-10°C~45°C	50,000H

ACU 200802 24x2W LED COB





Color Temperature	Initial Lumen Output
3000K	75 lm/W
4000K	86 lm/W
Beam angle	CRI
12°	≥ 90
20°	
30°	
Operation Temperature	Rated life hours
Operation Temperature -10°C~45°C	Rated life hours 50,000H
· · ·	
· · ·	
-10°C~45°C	50,000H
-10°C~45°C	50,000H Installation
-10°C~45°C	50,000H Installation

INDOOR LIGHTS - HELENE


ACU 200803 36x2W LED COB





Color Temperature	Initial Lumen Output
3000K	75 lm/W
4000K	86 lm/W
Beam angle	CRI
12°	≥ 90
20°	
30°	
Operation Temperature	Rated life hours
Operation Temperature	Rated life hours 50,000H
-10°C~45°C	50,000H
-10°C~45°C LED Type	50,000H
-10°C~45°C LED Type	50,000H

MENSA COLLECTION

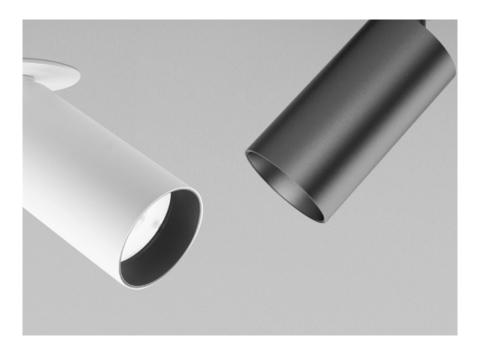

The new version of Mensa has expanded the installation type range of the fixtures. It's available in three sizes to emphasize areas or objects and to create visual impact & atmosphere.


DRIVERS ARE PROVIDED B TRIDONIC





ACU 201001 7W LED COB






Color Temperature	Initial Lumen Output
3000K	83 lm/W
4000K	96 lm/W
Beam angle	CRI
15°	≥90
24°	
36°	
Operation Temperature	Rated life hours
Operation Temperature -10°C~45°C	Rated life hours 50,000H
-10°C~45°C	50,000Н
-10°C~45°C	50,000H
-10°C~45°C	50,000H

Colors

Black 🗌 White

ACU 201002

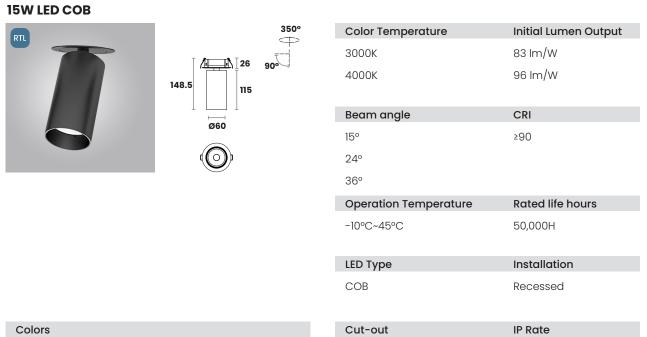


Ø55mm

Black 🗌 White

IP44


ACU 201003 **30W LED COB** 350° Initial Lumen Output Color Temperature RTL \Leftrightarrow 3000K 83 lm/W 90% <u>⊒Â</u> [26 Âт 96 lm/W 4000K 176.5 135 Beam angle CRI Ø77 15° ≥90 24° 36° Operation Temperature Rated life hours -10°C~45°C 50,000H LED Type Installation СОВ Recessed Colors Cut-out IP Rate Ø70mm IP44 Black White

ACU 201004

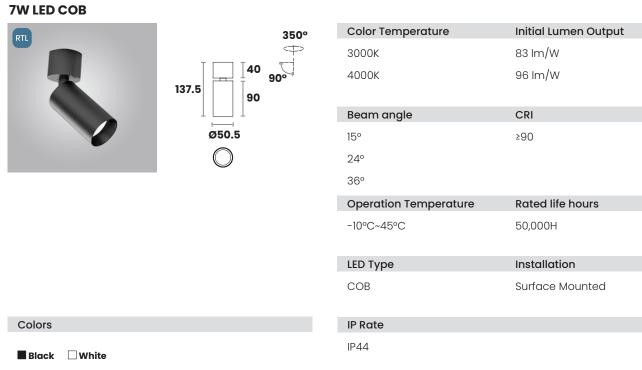

ACU 201005 **15W LED COB**






Color Temperature	Initial Lumen Output
3000K	83 lm/W
4000K	96 lm/W
Beam angle	CRI
15°	≥90
24°	
36°	
Operation Temperature	Rated life hours
-10°C~45°C	50,000H
LED Type	Installation
COB	Surface Mounted
IP Rate	
IP44	

Colors

Black 🗌 White

ACU 201006

30W LED COB

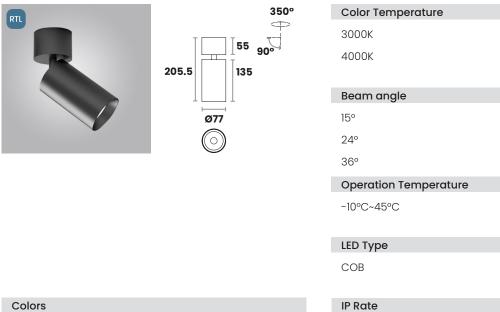

IP44

Colors

Black 🗌 White

ACUMEN | 66

Initial Lumen Output

83 lm/W

96 lm/W

Rated life hours

50,000H

Installation


Surface Mounted

CRI

≥90


ACU 201007 **7W LED COB** 350° Initial Lumen Output Color Temperature RTL $\langle \square \rangle$ 뵏∝ ⊂⊓∙∞ 83 lm/W 3000K 900 96 lm/W 4000K 127.5 120 Beam angle CRI 15° ≥90 Ø50 24° 36° Operation Temperature Rated life hours -10°C~45°C 50,000H LED Type Installation COB Track Colors IP Rate IP44 Black 🗌 White

ACU 201008

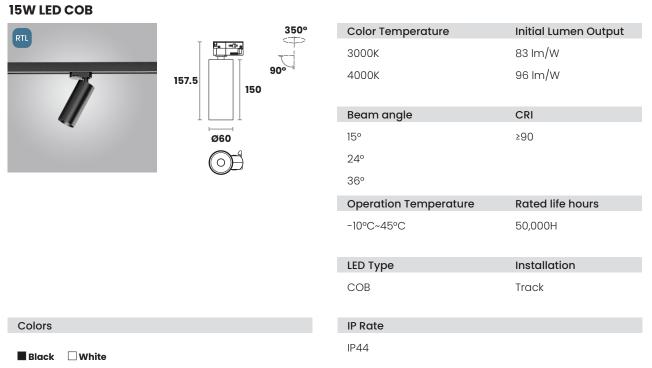

ACU 201009 30W LED COB






Color Temperature	Initial Lumen Output
3000K	83 lm/W
4000K	96 lm/W
Beam angle	CRI
15°	≥90
24º	
36°	
Operation Temperature	Rated life hours
-10°C~45°C	50,000H
LED Type	Installation
СОВ	Track

Colors

Black 🗌 White

IP Rate

IP44

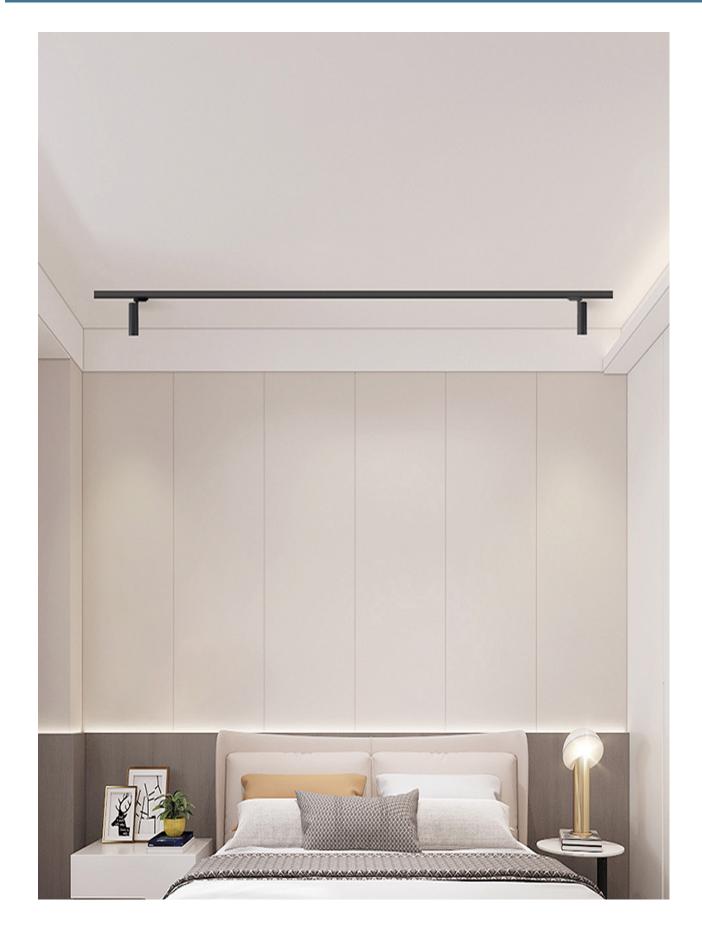

MOONLINE COLLECTION



Moonline was designed as an attractive and functional linear lighting system that can eliminate dark areas in a very innovative and stylish way.

DRIVERS ARE PROVIDED TRIDONIC

ACU MOON 01 10W LED COB




Color Temperature	Lumen Output
2700К	1000lm/m
3000K	
4000K	
600 K	
Beam angle	CRI
120°	≥90
Operation Temperature	Rated life hours
-20°C- +40°C	30,000 - 50,000H
LED Type	Length
СОВ	6m

ACU MOON 02 13.5W LED SMD




Color Temperature	Lumen Output
2700K	1500LM/M
3000К	
4000K	
600 0	
Beam angle	CRI
120°	≥90
Operation Temperature	Rated life hours
-20°C- +40°C	30,000 - 50,000H
LED Type	Length
SMD 2835	6m

INDOOR LIGHTS - MOONLINE

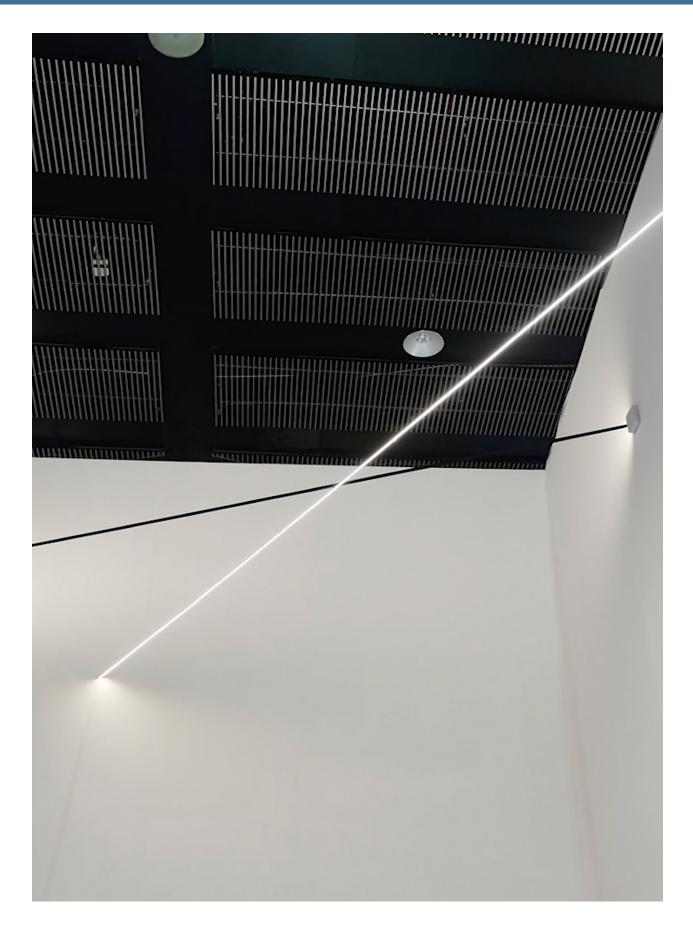


ACU MOON 03 8.7W LED SMD



Color Temperature	Lumen Output
2700К	99 0 M/M
3000K	
4000K	
600 %	
Beam angle	CRI
120°	≥90
Operation Temperature	Rated life hours
-20°C- +40°C	30,000 - 50,000H
LED Type	Length
SMD 2835	12m

ACU MOON 04 8.7W LED SMD



Color Temperature	Lumen Output
2700K	99 0 M/M
3000K	
4000K	
600 0 K	
Beam angle	CRI
120°	≥90
Operation Temperature	Rated life hours
-20°C- +40°C	30,000 - 50,000H
LED Type	Length
SMD 2835	20m



