

OUTDOOR LIGHTING

ACUMEN Outdoor lighting

These set of products brighten up and bring life to outdoor spaces of residential and commercial buildings with simple, and elegant modern outdoor lighting fixtures that are designed to illuminate and inspire. It enhances the beauty of any property while providing safety and security.

There are different types, shapes, and styles available, which can match with and add value to architecture and landscapes. Additionally, we offer the opportunity to adjust or select colour temperatures flexibly for various applications. Weather-proof materials will protect the products and maintain their efficient work.

The best lighting solutions conserve less energy, but LED light sources can provide very high luminance levels which may cause glare. For this reason, ACUMEN LED fixtures are commonly equipped with anti-glare accessories to reduce this unpleasant visual effect.

IN-GROUND UP-LIGHT



The Up-light Series for outdoor in-ground installation represent essential fixtures for lighting architectural elements or trees. Different wattage and shape types make the selection of an applicable product easier. Available with special components that provide visual comfort.


IN-GROUND UP-LIGHT



IN-GROUND UP-LIGHT



ACU OU 182001
1x2W




Color Temperature	Beam Angle	
3000K	10°	20°
4000K	15°	30°


Lumen Output	Voltage Output
164LM	24V

Operating Temperature	IK Rate
-20°C~+40°C	IK02


ACU OU182001S



Mounting Sleeve



IN-GROUND UP-LIGHT

ACU OU 182001M**1x0.5W****Color Temperature**

3000K

4000K

Beam Angle

70°

Lumen Output

23LM

Voltage Output




24V

Operating Temperature

-20°C~+40°C

IK Rate

IK02

ACU OU 182001MS**Mounting Sleeve****ACU OU 182002****1x2W****Color Temperature**

3000K

4000K

Beam Angle

9° 30°

15° 45°

20°

Lumen Output

143LM

183LM

Voltage Output



240V

Operating Temperature


-20°C~+40°C

IK Rate

IK08

ACU OU 182002S**Mounting Sleeve****Accessory****Honey Comb Louver**
ACU OU 182002H

IN-GROUND UP-LIGHT

ACU OU 182002A**1x2W**

Color Temperature	Beam Angle
-------------------	------------

3000K	35°/45° (Asymmetrical)
4000K	





Lumen Output	Voltage Output
--------------	----------------

130LM	240V
158LM	

Operating Temperature	IK Rate
-----------------------	---------

-20°C~+40°C	IK08
-------------	------

Mounting Sleeve

**ACU OU 182003M****1x4W**

Color Temperature	Beam Angle
-------------------	------------

3000K	9° 30°
4000K	15° 45°
	20°


Lumen Output	Voltage Output
--------------	----------------

200LM	240V
230LM	



Operating Temperature	IK Rate
-----------------------	---------

-20°C~+40°C	IK09
-------------	------


Mounting Sleeve	Accessory
-----------------	-----------



Honey Comb Louver
ACU OU 182003MH

ACU OU 182003MS

IN-GROUND UP-LIGHT

ACU OU 182003**4x2W****Color Temperature**

3000K

4000K

Beam Angle

10° 20°

15° 30°

Lumen Output

488LM

600LM

Voltage Output




240V

Operating Temperature

-20°C~+40°C

IK Rate

IK09

Mounting Sleeve**Accessory****Honey Comb Louver**
ACU OU 182003H**ACU OU182003S****ACU OU 182004****16x1.2W****Color Temperature**

3000K

4000K

Beam Angle

10° 20°

15° 30°

Lumen Output

1155LM

1215LM

Voltage Output




240V

Operating Temperature

-20°C~+40°C


IK Rate

IK10

Mounting Sleeve**Accessory****Honey Comb Louver**
Optional Accessory
ACU OU 182004H**ACU OU182004S**


IN-GROUND UP-LIGHT

ACU OU 182005
25x1W




Color Temperature		Beam Angle	
3000K		10°	20°
4000K		15°	30°
Lumen Output		Voltage Output	
2249LM		240V	
2573LM			

ACU OU 182005S




Operating Temperature	IK Rate
-20°C~+40°C	IK10


Mounting Sleeve	Accessory
	 Honey Comb Louver ACU OU 182005H



ACU OU 182008




GU10 Socket
The maximum power limit, input voltage, color temperature, beam angle, etc. are according to GU10 lamp specifications.

Mounting Sleeve




IN-GROUND UP-LIGHT




ACU OU 183003**1x2W****ADJUSTABLE**

Color Temperature	Beam Angle	
3000K	9°	20°
4000K	15°	45°

Lumen Output	Voltage Output
112LM 147LM	240V

Operating Temperature	IK Rate
-20°C~+40°C	IK09

Mounting Sleeve	Accessory
-----------------	-----------





**Honey Comb Louver**
ACU OU 183003H**ACU OU 183003S****ACU OU 183004****1x3W****ADJUSTABLE**

Color Temperature	Beam Angle	
3000K	9°	30°
4000K	20°	

Lumen Output	Voltage Output
300LM	240V


Operating Temperature	IK Rate
-20°C~+40°C	IK09

Mounting Sleeve	Accessory
-----------------	-----------



**Honey Comb Louver**
ACU OU 183004H**ACU OU 183004S**

IN-GROUND UP-LIGHT

ACU OU 183005
6x1.2W



ACU OU 183005S





ADJUSTABLE

Color Temperature	Beam Angle	
3000K	15°	30°
4000K	20°	50°

Lumen Output	Voltage Output
570LM	240V
700LM	


Operating Temperature	IK Rate
-20°C~+40°C	IK10

Mounting Sleeve	Accessory
-----------------	-----------





Honey Comb Louver
ACU OU 183005H

ACU OU 182006
9x1.2W



ACU OU 182006S





ADJUSTABLE

Color Temperature	Beam Angle	
3000K	15°	30°
4000K	20°	50°

Lumen Output	Voltage Output
756LM	240V
1090LM	


Operating Temperature	IK Rate
-20°C~+40°C	IK10

Mounting Sleeve	Accessory
-----------------	-----------



Honey Comb Louver
ACU OU 182006H

IN-GROUND UP-LIGHT



ACU OU 183007**12x1.5W****ADJUSTABLE**

Color Temperature	Beam Angle	
3000K	13°	30°
4000K	25°	



Lumen Output	Voltage Output
1389LM	240V
1885LM	

Operating Temperature	IK Rate
-20°C~+40°C	IK10

Mounting Sleeve	Accessory
-----------------	-----------



Honey Comb Louver
ACU OU 183007H



**ACU OU 183008****12x2.2W****ADJUSTABLE**

Color Temperature	Beam Angle	
3000K	13°	30°
4000K	25°	

Lumen Output	Voltage Output
2392LM	240V

Operating Temperature	IK Rate
-20°C~+40°C	IK10


Mounting Sleeve	Accessory
-----------------	-----------



Honey Comb Louver
ACU OU 183008H



IN-GROUND UP-LIGHT

ACU OU 182009**1x2W****ULTRA THIN**

Color Temperature	Beam Angle	
3000K	9°	30°
4000K	15°	45°
	20°	


Lumen Output	Voltage Output
110LM	240V
130LM	

Operating Temperature	IK Rate
-20°C~+40°C	IK08

Accessory





Honey Comb Louver
Optional Accessory
ACU OU 182009H

**ACU OU 182010****3x2W****ULTRA THIN**


Color Temperature	Beam Angle	
3000K	9°	30°
4000K	15°	45°
	20°	

Lumen Output	Voltage Output
388LM	240V
452LM	

Operating Temperature	IK Rate
-20°C~+40°C	IK08

ACU OU 182010S

IN-GROUND UP-LIGHT

ACU OU 182011**6x2W****ULTRA THIN****Color Temperature**

3000K

4000K

Beam Angle

9° 30°

15° 45°

20°


Lumen Output

783LM

956LM

Voltage Output


240V

ACU OU 182011S**Operating Temperature**

-20°C~+40°C

IK Rate

IK08

ACU OU 182012**1x3W****Color Temperature**

3000K

4000K

Beam Angle

N/A

Lumen Output

4.4LM

4.8LM

Voltage Output


240V

Operating Temperature

-20°C~+40°C

IK Rate


IK10

Mounting Sleeve

IN-GROUND UP-LIGHT


ACU OU 182013

1x3W




Color Temperature		Beam Angle	
3000K		N/A	
4000K			
Lumen Output		Voltage Output	
4.4LM		240V	
4.8LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK10	

Mounting Sleeve




ACU OU 182014

1x3W



Color Temperature		Beam Angle	
3000K		N/A	
4000K			
Lumen Output		Voltage Output	
4.4LM		240V	
4.8LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK10	

Mounting Sleeve



IN-GROUND WALL WASHER & RECESSED WALL LIGHT




This trimless product can be used as in-ground wall washer or as a recessed wall light.


IN-GROUND WALL WASHER & RECESSED WALL LIGHT

ACU OUW 214001


1x5W



Wall light



Inground light



Color Temperature

3000K
4000K

Beam Angle

30°

Lumen Output

375LM
755LM

Voltage Output

240V


Operating Temperature

-20°C~+40°C

IK Rate


IK06

Mounting Sleeve




ACU OUW 214002


1x5W



Wall light



Inground light



Color Temperature

3000K
4000K

Beam Angle

30°

Lumen Output

375LM
755LM

Voltage Output

240V


Operating Temperature

-20°C~+40°C

IK Rate

IK06

Mounting Sleeve




SURFACE MOUNTED




Surface-mounted outdoor lights are produced for wall and ceiling installation that doesn't require cutting the surface. Weatherproof materials are used to protect products and prolong their life span.

SURFACE MOUNTED

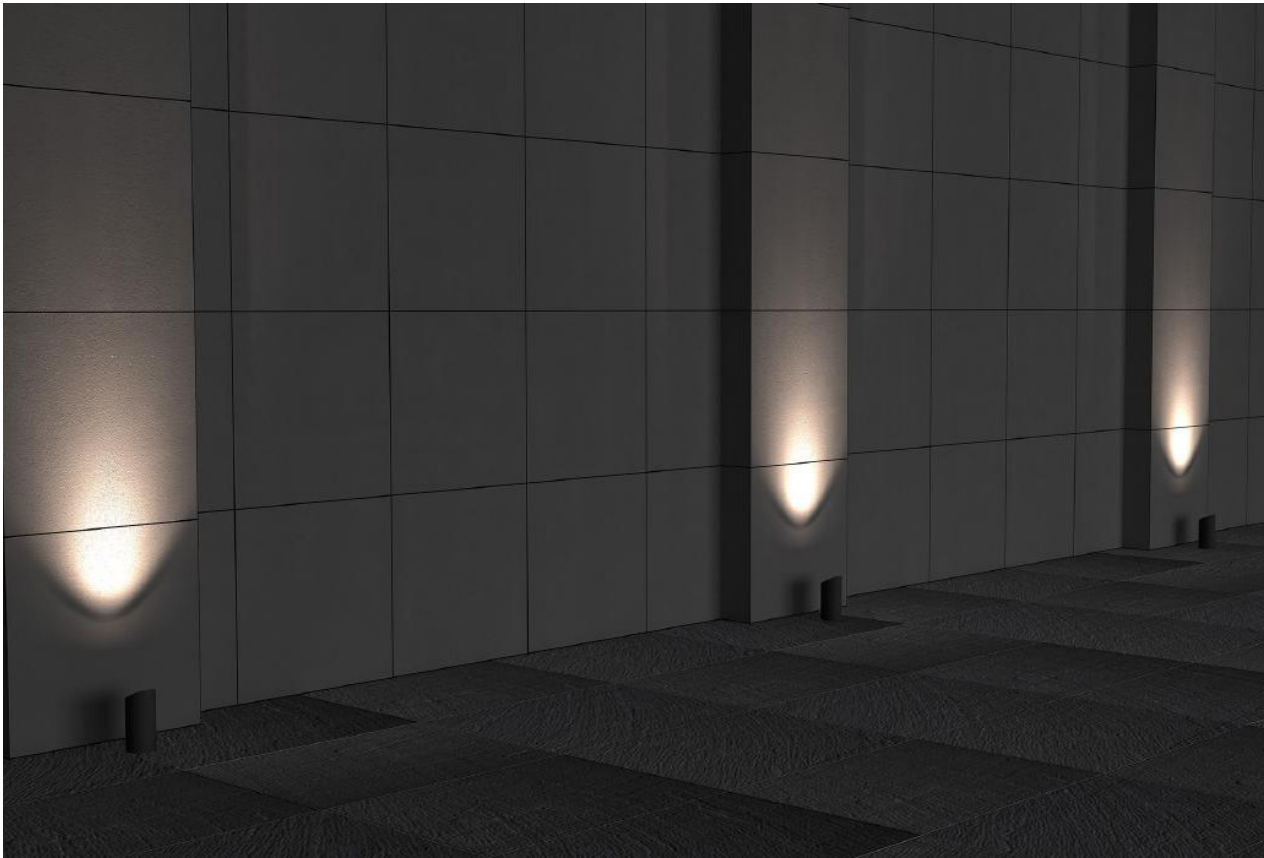

ACU OSM 182015

1x5W




Color Temperature		Beam Angle	
3000K		18°	32°
4000K		24°	
Lumen Output		Voltage Output	
460LM		240V	
Operating Temperature		IK Rate	
-20°C~+40°C		IK06	

SURFACE MOUNTED

ACU OSM 182016


1x6W



Color Temperature		Beam Angle	
3000K		15°	38°
4000K		24°	60°
Lumen Output		Voltage Output	
722LM		240V	
Operating Temperature		IK Rate	
-20°C~+40°C		IK08	

ACU OSM 208101


15W



Color Temperature		Beam Angle	
3000K		15°	36°
4000K		24°	60°
Lumen Output		Voltage Output	
880LM		240V	
Operating Temperature			
-20°C~+40°C			

SURFACE MOUNTED


ACU OSM 215001
1x8W



Color Temperature		Beam Angle	
3000K		15°	40°
4000K		30°	
Lumen Output		Voltage Output	
850LM		240V	
896LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK06	

Color			Accessory	
Sanded Black	Dark Gray	Sanded White	Honeycomb Louver	


ACU OSM 215002
1x18W



Color Temperature		Beam Angle	
3000K		15°	40°
4000K		30°	
Lumen Output		Voltage Output	
2105LM		240V	
2400LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK06	

Color			Accessory	
Sanded Black	Dark Gray	Sanded White	Honeycomb Louver	

SURFACE MOUNTED

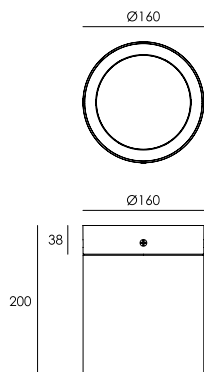ACU OSM 215003**1x30W****Color Temperature**

3000K

4000K

Beam Angle

12° 38°

25°

Lumen Output

3177LM

3400LM

Voltage Output


240V

Operating Temperature

-20°C~+40°C

IK Rate

IK06

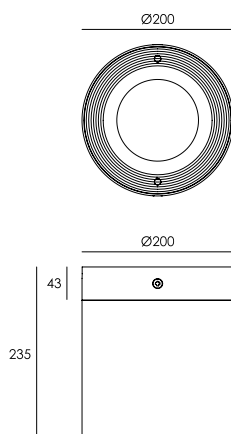ColorSanded
BlackDark
GraySanded
WhiteHoneycomb
Louver**ACU OSM 215004****1x50W****Color Temperature**

3000K

4000K

Beam Angle

12° 38°

25°

Lumen Output

4549LM

Voltage Output

240V

Operating Temperature


-20°C~+40°C

IK Rate


IK06

ColorSanded
BlackDark
GraySanded
WhiteHoneycomb
Louver

SURFACE MOUNTED

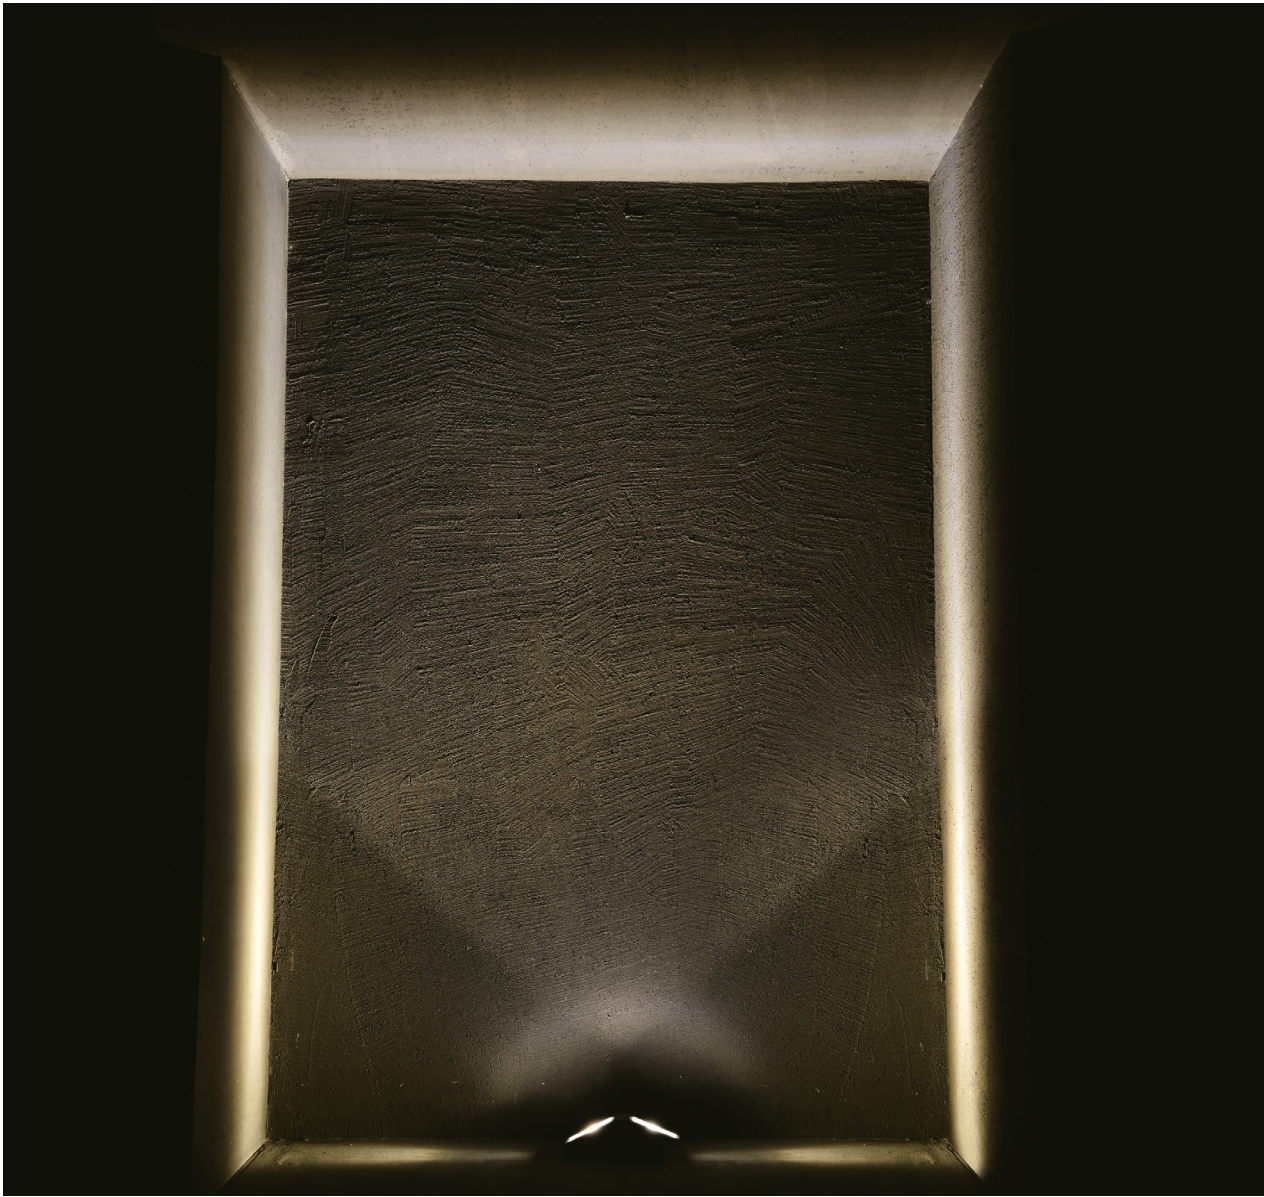

ACU OSM 182069
2x3W



Color Temperature	Beam Angle
3000K	120°
4000K	
Operating Temperature	Voltage Output
-20°C~+40°C	240V




LINEAR LIGHT




Linear light series are available in ground-recessed and wall washing adjustable types, as well as different lengths. Anti-glare accessories provide spotless light output.

LINEAR LIGHT

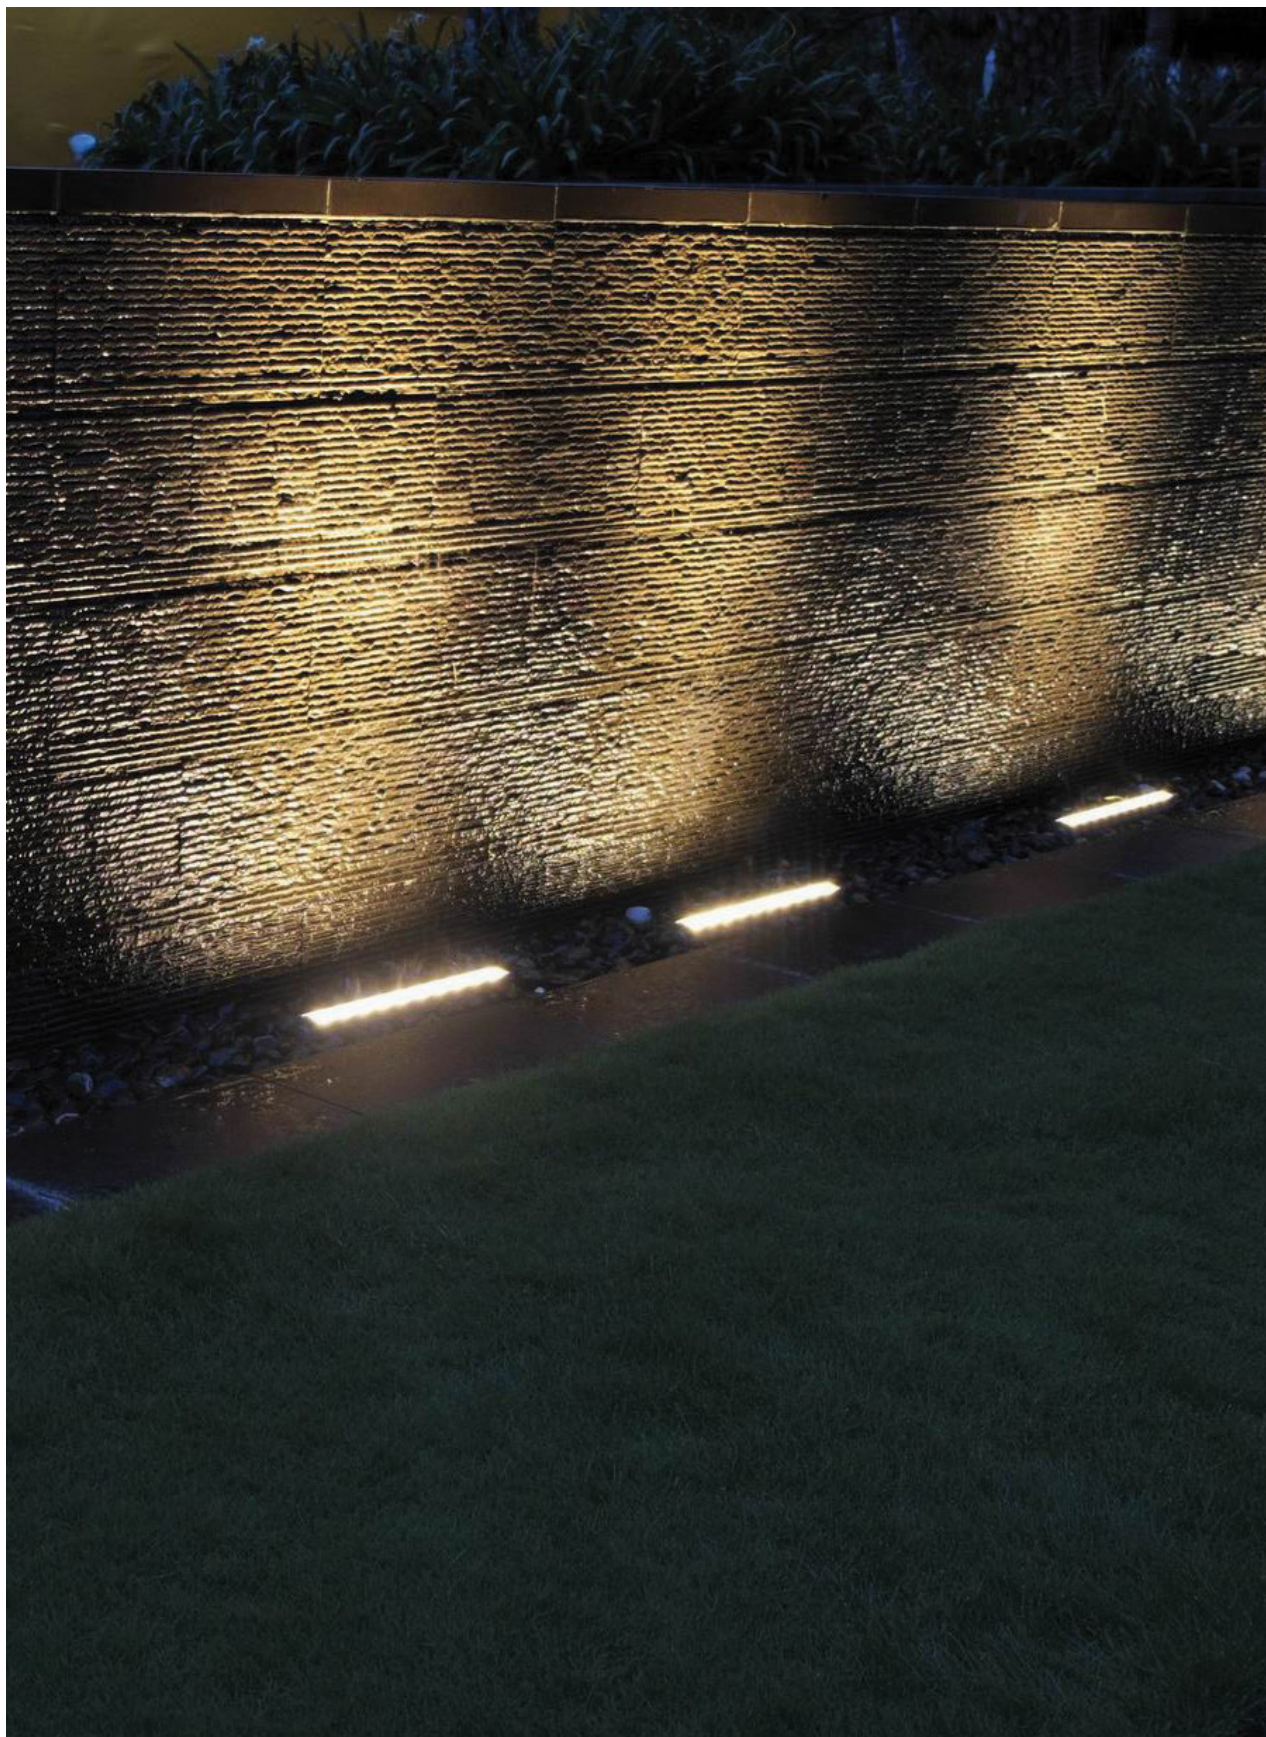

LINEAR LIGHT

ACU OL 182020**3x2W****Color Temperature**

3000K

4000K

Beam Angle

8° 25°

13° 30°

Lumen Output

395LM

508LM

Voltage Output



240V

Operating Temperature

-20°C~+40°C

IK Rate

IK08

Mounting Sleeve**ACU OL 182020A****3x2W****Color Temperature**

3000K

4000K

Beam Angle35°/45°
Asymmetrical**Lumen Output**

340LM

344LM

Voltage Output



240V

Operating Temperature

-20°C~+40°C


IK Rate

IK08

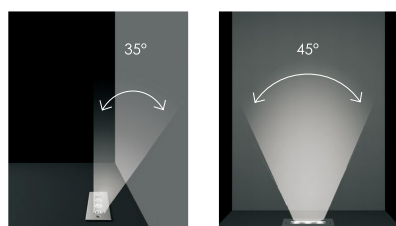Mounting Sleeve

LINEAR LIGHT

ACU OL 182021
6x2W




Color Temperature	Beam Angle
3000K	8° 25°
4000K	13° 30°


Lumen Output	Voltage Output
733LM	240V
1100LM	

Operating Temperature	IK Rate
-20°C~+40°C	IK08

Mounting Sleeve



ACU OL 182021A
6x2W





Color Temperature	Beam Angle
3000K	35°/45°
4000K	Asymmetrical

Lumen Output	Voltage Output
823LM	240V
875LM	


Operating Temperature	IK Rate
-20°C~+40°C	IK08

Mounting Sleeve

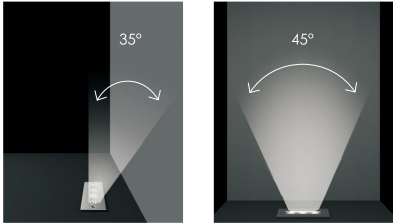

LINEAR LIGHT

ACU OL 182022
12x1.5W




Color Temperature	Beam Angle	
3000K	20°	35°
4000K	25°	45°
	30°	


Lumen Output	Voltage Output
1020LM	240V
1108LM	

Operating Temperature	IK Rate
-20°C~+40°C	IK07

Mounting Sleeve



ACU OL 182022A
12x1.5W




Color Temperature	Beam Angle
3000K	35°/45°
4000K	Asymmetrical

Lumen Output	Voltage Output
1020LM	240V
1108LM	


Operating Temperature	IK Rate
-20°C~+40°C	IK07

Mounting Sleeve

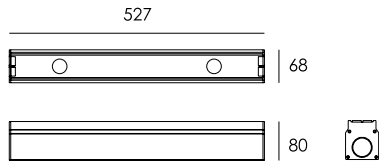

LINEAR LIGHT

ACU OL 182081
9W




Color Temperature	Beam Angle	
3000K	20°	35°
4000K	25°	45°
	30°	


Lumen Output	Voltage Output
650LM	240V

Operating Temperature	IK Rate
-20°C~+40°C	IK07

Mounting Sleeve



ACU OL 182023
24x1.5W




Color Temperature	Beam Angle	
3000K	20°	35°
4000K	25°	45°
	30°	

Lumen Output	Voltage Output
2055LM	240V
2198LM	



Operating Temperature	IK Rate
-20°C~+40°C	IK07

Mounting Sleeve



LINEAR LIGHT

ACU OL 182023A
24x1.5W




Color Temperature	Beam Angle
3000K	35°/45°
4000K	Asymmetrical


Lumen Output	Voltage Output
2114LM	240V
2472LM	

Operating Temperature	IK Rate
-20°C~+40°C	IK07

Mounting Sleeve



ACU OL 182080
18W




Color Temperature	Beam Angle
3000K	20° 35°
4000K	25° 45°
	30°

Lumen Output	Voltage Output
1359LM	240V


Operating Temperature	IK Rate
-20°C~+40°C	IK07

Mounting Sleeve




LINEAR LIGHT

ACU OL 182024
6x1W




Color Temperature		Beam Angle	
3000K		15°	30°
4000K		20°	50°
Lumen Output		Voltage Output	
512LM		240V	
530LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK02	

Adjustable Beam Direction

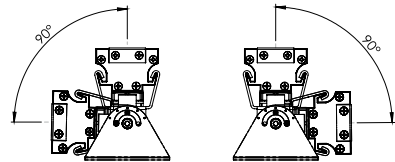


ACU OL 182025
12x1W



Color Temperature		Beam Angle	
3000K		15°	30°
4000K		20°	50°
Lumen Output		Voltage Output	
864LM		240V	
1080LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK02	


Adjustable Beam Direction

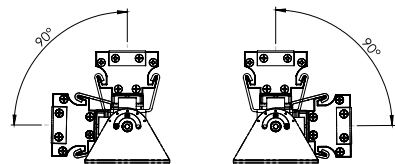

LINEAR LIGHT

ACU OL 182026

24x1W



Color Temperature

3000K

4000K

Beam Angle

15° 30°

20° 50°

Lumen Output

1976LM

2140LM

Voltage Output

240V


Operating Temperature

-20°C~+40°C

IK Rate

IK02

Adjustable Beam Direction

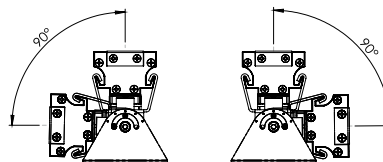



ACCESSORIES



Bevel Cut Anti-Glare
Reflector



Basic Unit: 240x48mm

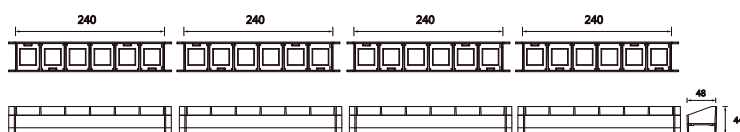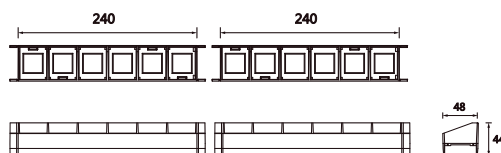


FLOOD & PROJECTOR LIGHT




Architectural and Landscape light series are perfect when illuminating trees, tall structures, and vast spaces. Available as a ground or wall mount. The Spike Mount accessory firmly plants the luminaire in the ground. It is perfect for any outdoor area where ground illumination is required.

FLOOD & PROJECTOR LIGHT



ACU OP 211101S**12W**

RTL

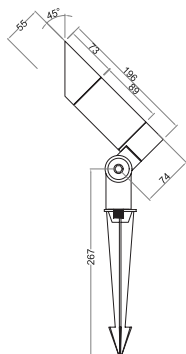**Color Temperature**

3000K

4000K

Beam Angle

15°

40°

Lumen Output

90LM/W

Voltage Output


220V

Operating Temperature


-25°C~+60°C

IK Rate

IK07

ACU OP 211102S**16W**

RTL

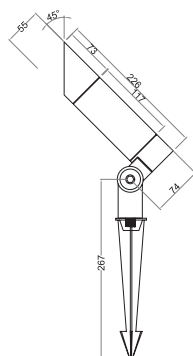**Color Temperature**

3000K

4000K

Beam Angle

15°

40°

Lumen Output

90LM/W

Voltage Output


220V

Operating Temperature


-25°C~+60°C

IK Rate

IK07

ACU OP 211003S**6W**

RTL

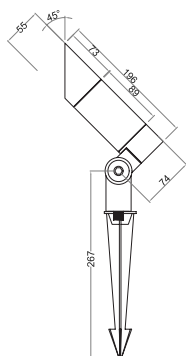**Color Temperature**

2700K

3000K

4000K

Beam Angle

15°

40°

Lumen Output

540LM/W

Voltage Output

220V

Operating Temperature



-25°C~+60°C

IK Rate

IK07


FLOOD & PROJECTOR LIGHT

ACU OP 211003M
6W

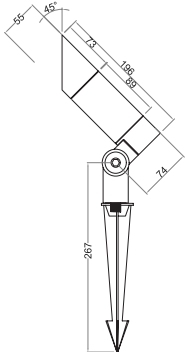


Color Temperature	Beam Angle
2700K	15°
3000K	40°
4000K	
Lumen Output	Voltage Output
540LM/W	220V
Operating Temperature	IK Rate
-25°C~+60°C	IK07

ACU OP 211102M
16W



Color Temperature	Beam Angle
3000K	15°
4000K	40°
Lumen Output	Voltage Output
90LM/W	220V
Operating Temperature	IK Rate
-25°C~+60°C	IK07


ACU OP 211101M
12W



Color Temperature	Beam Angle
3000K	15°
4000K	40°
Lumen Output	Voltage Output
90LM/W	220V
Operating Temperature	IK Rate
-25°C~+60°C	IK07

FLOOD & PROJECTOR LIGHT

ACU OP 211000R




Item Name	Diameter
Palm Tree Ring	600mm

STAIR & RECESSED WALL LIGHT



Stair light series for exterior recessed applications. Designed for low mounting heights with downward light distribution.


STAIR & RECESSED WALL LIGHT

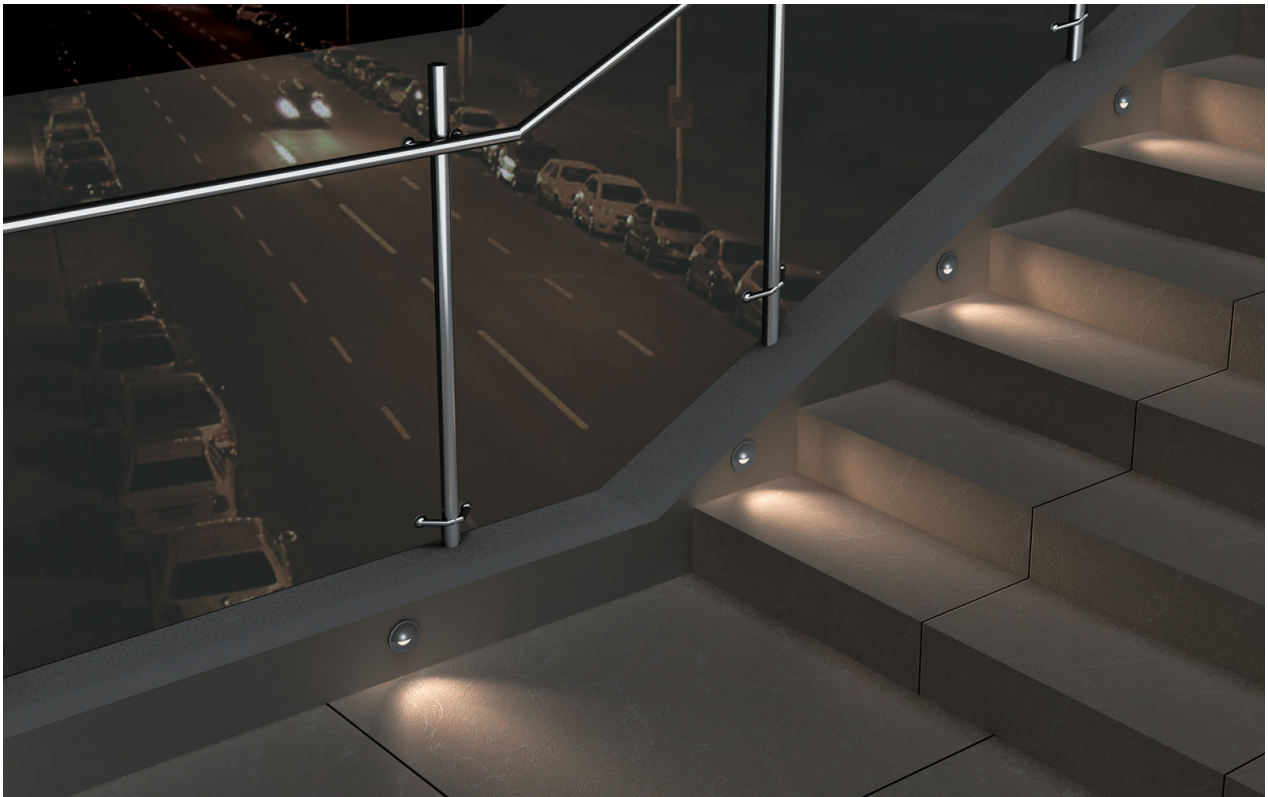

STAIR & RECESSED WALL LIGHT


ACU OSR 182036

6.5W





Color Temperature	Beam Angle
3000K	N/A
4000K	
Lumen Output	Voltage Output
92LM	240V
99LM	
Operating Temperature	IK Rate
-20°C~+40°C	IK10

Mounting Sleeve




ACU OSR 216001

30x0.3W




Color Temperature	Beam Angle
3000K	120°
4000K	
Lumen Output	Voltage Output
292LM	240V
330LM	
Operating Temperature	IK Rate
-20°C~+40°C	IK10

Mounting Sleeve

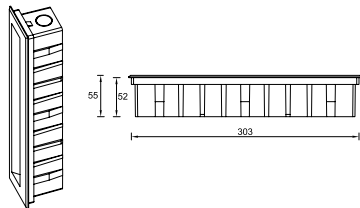

STAIR & RECESSED WALL LIGHT

ACU OSR 182037**3x0.7W****Color Temperature**

3000K

4000K

Beam Angle

N/A

Lumen Output

24LM

26LM

Voltage Output




240V

Operating Temperature

-20°C~+40°C

IK Rate

IK10

Mounting Sleeve**ACU OSR 216002****10x0.5W****Color Temperature**

3000K

4000K

Beam Angle

N/A

Lumen Output

112.9LM

124.6LM

Voltage Output


240V

Operating Temperature

-20°C~+40°C

IK Rate



IK10

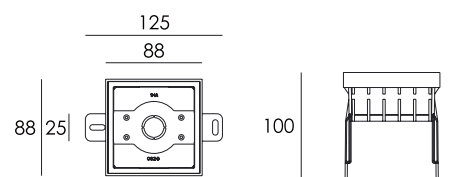Mounting Sleeve

STAIR & RECESSED WALL LIGHT


ACU OSR 182038

18x0.2W




Color Temperature		Beam Angle	
3000K		N/A	
4000K			
Lumen Output		Voltage Output	
46LM		240V	
58LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK10	

Mounting Sleeve




ACU OSR 216003

9x0.5W





Color Temperature		Beam Angle	
3000K		77° x 35°	
4000K			
Lumen Output		Voltage Output	
70LM		240V	
Operating Temperature		IK Rate	
-20°C~+40°C		IK10	

Mounting Sleeve

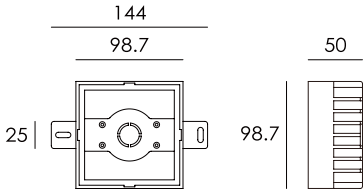

STAIR & RECESSED WALL LIGHT

ACU OSR 216004**1x2W****Color Temperature**

3000K

4000K

Beam Angle

50°

Lumen Output

52LM

58LM

Voltage Output



24V

Operating Temperature

-20°C~+40°C

IK Rate

IK10

Mounting Sleeve**ACU OSR 182039****1x1W****Color Temperature**

3000K

4000K

Beam Angle

20°

Lumen Output

23LM

28LM

Voltage Output


24V

Operating Temperature

-20°C~+40°C

IK Rate


IK10

Mounting Sleeve

STAIR & RECESSED WALL LIGHT

ACU OSR 182040

1x2W



Color Temperature	Beam Angle
-------------------	------------

3000K	22°
4000K	


Lumen Output	Voltage Output
--------------	----------------

51LM	24V
60LM	

Operating Temperature	IK Rate
-----------------------	---------


-20°C~+40°C	IK10
-------------	------

Mounting Sleeve



ACU OSR 182041

1x5W



Color Temperature	Beam Angle
-------------------	------------

3000K	18° 32°
4000K	24°


Lumen Output	Voltage Output
--------------	----------------

208LM	24V
237LM	

Operating Temperature	IK Rate
-----------------------	---------


-20°C~+40°C	IK10
-------------	------

Mounting Sleeve




STAIR & RECESSED WALL LIGHT

ACU OSR 216005
12x0.5W



Color Temperature		Beam Angle	
3000K		125°× 40°	
4000K			
Lumen Output		Voltage Output	
57LM		240V	
Operating Temperature		IK Rate	
-20°C~+40°C		IK10	
Mounting Sleeve			



WALL LIGHT





Wall-mounted outdoor light series create a welcoming atmosphere by highlighting features of a building or structure. A variety of shapes and styles contribute to the overall architectural design of the building.

WALL LIGHT



ACU OW 182042


1x6W

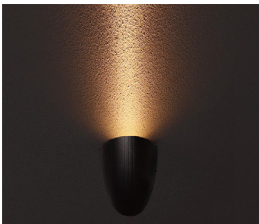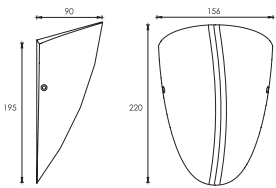


Color Temperature		Beam Angle	
3000K		10°	22°
4000K		15°	
Lumen Output		Voltage Output	
444LM		240V	
500LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK05	

WALL LIGHT

ACU OW 182043
1x4.5W




Color Temperature		Beam Angle	
3000K		15°	38°
4000K		24°	
Lumen Output		Voltage Output	
254LM		240V	
Operating Temperature		IK Rate	
-20°C~+40°C		IK05	
Accessory			




Honey Comb Louver
ACU OW 182043H

ACU OW 182044
1x10W



Color Temperature		Beam Angle	
3000K		15°	38°
4000K		24°	60°
Lumen Output		Voltage Output	
1170LM		240V	
1335LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK10	
Accessory			





Honey Comb Louver
ACU OW 182044H

WALL LIGHT

ACU OW 217001


1x10W



Color Temperature		Beam Angle	
3000K		6°	
4000K			
Lumen Output		Voltage Output	
504LM		240V	
Operating Temperature		IK Rate	
-20°C~+40°C		IK06	

ACU OW 182045

1x18W



Color Temperature		Beam Angle	
3000K		12°	38°
4000K		22°	55°
Lumen Output		Voltage Output	
1432LM		240V	
1684LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK10	


Accessory




Honey Comb Louver
ACU OW 182045H

WALL LIGHT

ACU OW 182046
1x25W




Color Temperature		Beam Angle	
3000K		10°	38°
4000K		22°	
Lumen Output		Voltage Output	
2412LM		240V	
2615LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK10	
Accessory			




Honey Comb Louver
ACU OW 182046H

ACU OW 182047
2x4.5W



Color Temperature		Beam Angle	
3000K		15°	38°
4000K		24°	
Lumen Output		Voltage Output	
2x254LM		240V	
Operating Temperature		IK Rate	
-20°C~+40°C		IK10	
Accessory			




Honey Comb Louver
ACU OW 182047H


WALL LIGHT

ACU OW 182048

2x8W

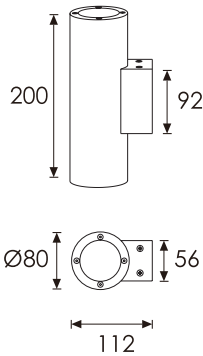


Color Temperature		Beam Angle	
3000K		15°	38°
4000K		24°	60°
Lumen Output		Voltage Output	
2x986LM		240V	
2x1053LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK10	
Accessory			




Honey Comb Louver
ACU OW 182048H

ACU OW 217002

2x8W

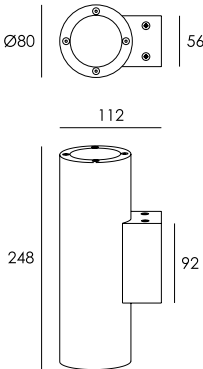


Color Temperature		Beam Angle	
3000K		6°	
4000K			
Lumen Output		Voltage Output	
2x297LM		240V	
Operating Temperature		IK Rate	
-20°C~+40°C		IK06	



WALL LIGHT

ACU OW 182049
2x12W

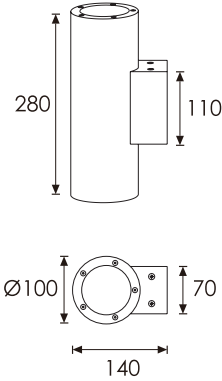


Color Temperature		Beam Angle	
3000K		12°	35°
4000K		22°	55°
Lumen Output		Voltage Output	
2x1079LM		240V	
2x1289LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK10	
Accessory			




Honey Comb Louver
ACU OW 182049H

ACU OW 182050
2x18W



Color Temperature		Beam Angle	
3000K		10°	38°
4000K		22°	
Lumen Output		Voltage Output	
2x1617LM		240V	
2x1795LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK10	
Accessory			




Honey Comb Louver
ACU OW 182050H

WALL LIGHT

ACU OW 182051

1x6W




Color Temperature		Beam Angle	
3000K		18°	40°
4000K		25°	
Lumen Output		Voltage Output	
651LM		240V	
745LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK06	
Accessory			



Honey Comb Louver
ACU OW 182051H

ACU OW 182052

2x6W





Color Temperature		Beam Angle	
3000K		18°	40°
4000K		25°	
Lumen Output		Voltage Output	
2x651LM		240V	
2x745LM			
Operating Temperature		IK Rate	
-20°C~+40°C		IK06	
Accessory			



Honey Comb Louver
ACU OW 182052H


WALL LIGHT

ACU OW 182051N
1x3W





Color Temperature	Beam Angle
3000K	10°
4000K	
Operating Temperature	Voltage Output
-20°C~+40°C	240V
IK Rate	

ACU OW 182052N
2x3W



Color Temperature	Beam Angle
3000K	10°
4000K	
Operating Temperature	Voltage Output
-20°C~+40°C	240V
IK Rate	

WALL LIGHT

ACU OW 221001**5W****Color Temperature**

3000K

4000K

Beam Angle

360°

Lumen Output

100LM

Voltage Output



240V

Operating Temperature

-20°C~+55°C

IK Rate

IK02

ACU OW 221002**8W****Color Temperature**

3000K

4000K

Beam Angle

360°

Lumen Output

100LM

Voltage Output



240V

Operating Temperature

-20°C~+55°C

IK Rate

IK02

ACU OW 221003**10W****Color Temperature**

3000K

4000K

Beam Angle

360°

Lumen Output

100LM

Voltage Output

240V

Operating Temperature

-20°C~+55°C

IK Rate

IK08

WALL LIGHT



STRIP LIGHT




**Unique optical light distribution structure design,
uniform lighting surface, and no shadow.**

**The silicone material is flexible, simple, and has
a stylish appearance.**

STRIP LIGHT

ACU ST 202201


10.6W



Color Temperature	Lumen Output
2700K	520LM
3000K	520LM
4000K	520LM
6000K	460LM
Bend Direction	Voltage Output
Side Bend	24V
CRI	Rated Current
>90	0.4A

ACU ST 202202


13.2W



Color Temperature	Lumen Output
RGB	N/A
Bend Direction	Voltage Output
Side Bend	24V
CRI	Rated Current
>90	0.5A

ACU ST 202203

16.5W




Color Temperature	Lumen Output
RGB~2700K	N/A
RGB~3500K	
RGB~4000K	
RGB~5000K	
Bend Direction	Voltage Output
Side Bend	24V
CRI	Rated Current
>90	0.6A

STRIP LIGHT

ACU ST 202204


13.2W



Color Temperature		Lumen Output
2300~4000K		650LM
2700~6000K		
Bend Direction		Voltage Output
Side Bend		24V
CRI		Rated Current
>90		0.5A

ACU ST 202205


6W



Color Temperature		Lumen Output
2700K		200LM
3000K		200LM
4000K		200LM
6000K		240LM
Bend Direction		Voltage Output
Side Bend		48V
CRI		Rated Current
>95		0.11A

ACU ST 202301


10.6W



Color Temperature		Lumen Output
2700K		520LM
3000K		520LM
4000K		520LM
6000K		460LM
Bend Direction		Voltage Output
Top Bend		24V
CRI		Rated Current
>90		0.4A


STRIP LIGHT

ACU ST 202302
13.2W




Color Temperature	Lumen Output
RGB	N/A
Bend Direction	Voltage Output
Top Bend	24V
CRI	Rated Current
>90	0.5A

ACU ST 202303
16.5W



Color Temperature	Lumen Output
RGB~2700K	N/A
RGB~3500K	
RGB~4000K	
RGB~5000K	
Bend Direction	Voltage Output
Top Bend	24V
CRI	Rated Current
>90	0.6A

ACU ST 202304
13.2W




Color Temperature	Lumen Output
2700~5000K	650LM
Bend Direction	Voltage Output
Top Bend	24V
CRI	Rated Current
>95	0.5A

STRIP LIGHT

ACU ST 202305


6W



Color Temperature	Lumen Output
2700K	280LM
3000K	320LM
4000K	320LM
6000K	350LM
Bend Direction	Voltage Output
Top Bend	48V
CRI	Rated Current
>95	0.11A

ACU ST 202401

8W




ULTRASLIM



Color Temperature	Lumen Output
2300K	240LM
2700K	240LM
3000K	240LM
4000K	270LM
Bend Direction	Voltage Output
Side Bend	24V
CRI	Rated Current
>95	0.6A / 0.3A

ACU ST 202402

8W




ULTRASLIM



Color Temperature	Lumen Output
RGBY	N/A
Bend Direction	Voltage Output
Side Bend	24V
CRI	Rated Current
>95	0.6A / 0.3A


STRIP LIGHT

ACU ST 202403
8W




Color Temperature		Lumen Output
2300K		170LM
4000K		
Bend Direction		Voltage Output
Side Bend		24V
CRI		Rated Current
>95		0.5A

ACU ST 202501
10.6W




Color Temperature		Lumen Output
2300K		250LM
2700K		280LM
3000K		280LM
4000K		280LM
Bend Direction		Voltage Output
Side Bend		24V
CRI		Rated Current
>95		0.8A / 0.4A

ACU ST 202502
8.8W




Color Temperature		Lumen Output
RGBY		N/A
Bend Direction		Voltage Output
Side Bend		24V
CRI		Rated Current
>95		0.67A / 0.34A


STRIP LIGHT

ACU ST 202503**10.6W**

Color Temperature	Lumen Output
2300~4000K	280LM
Bend Direction	Voltage Output
Side Bend	24V
CRI	Rated Current
>95	0.8A / 0.4A

ACU ST 202601**10.6W**

Color Temperature	Lumen Output
2300K	330LM
2700K	400LM
3000K	430LM
4000K	430LM
Bend Direction	Voltage Output
Top Bend	24V
CRI	Rated Current
>95	0.4A


ACU ST 202602**13.2W**

Color Temperature	Lumen Output
RGB	N/A
Bend Direction	Voltage Output
Top Bend	24V
CRI	Rated Current
>95	0.5A

STRIP LIGHT

ACU ST 202603


10.6W



Color Temperature	Lumen Output
2300K~4000K	380LM
Bend Direction	Voltage Output
Top Bend	24V
CRI	Rated Current
>95	0.4A

ACU ST 202701


10.6W



Color Temperature	Lumen Output
2700K	520LM
3200K	520LM
4200K	520LM
5000K	490LM
Bend Direction	Voltage Output
Side Bend	24V
CRI	Rated Current
>90	0.4A

ACU ST 202702

13.2W



Color Temperature	Lumen Output
RGB	N/A
Bend Direction	Voltage Output
Side Bend	24V
CRI	Rated Current
>90	0.5A

BOLLARD LIGHT




Bollards are designed to provide general lighting with visual comfort and facilitate orientation.

BOLLARD LIGHT



ACU OB 182070

5W



Color Temperature

3000K

4000K

Beam Angle

120°

Operating Temperature

-20°C~+40°C



BOLLARD LIGHT

ACU OB 182071

5W



Color Temperature	Beam Angle
3000K	120°
4000K	
Operating Temperature	Height
-20°C~+40°C	600mm

ACU OB 182072


7W



Color Temperature	Beam Angle
3000K	120°
4000K	
Operating Temperature	-20°C~+40°C

ACU OB 182073


7W



Color Temperature	Height
3000K	400mm ACU OB 182073-1
4000K	600mm ACU OB 182073-2
	800mm ACU OB 182073-3
Operating Temperature	-20°C~+40°C

BOLLARD LIGHT


ACU OB 182074
9W



Color Temperature	Height
3000K	350mm $\varnothing$ CU OB 182074-1
4000K	500mm $\varnothing$ CU OB 182074-2
	800mm $\varnothing$ CU OB 182074-3

Operating Temperature
-20°C~+40°C

ACU OB 182075
16.8W



Color Temperature	Height
3000K	300mm $\varnothing$ CU OB 182075-1
4000K	550mm $\varnothing$ CU OB 182075-2
	800mm $\varnothing$ CU OB 182075-3

Operating Temperature
-20°C~+40°C