




CATA LOGUE **PONTO**

ACUMEN

www.acumenlight.com


ACCESSORY

ACU BS 240000T

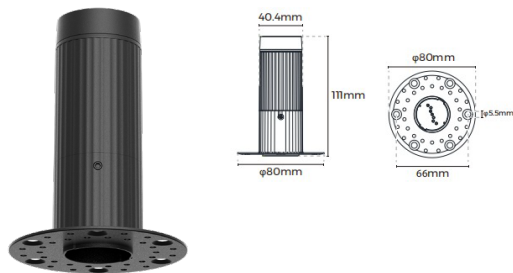

Wattage	Rated Current
72W	3A
Open Size	Input voltage
φ45mm	24V DC Rated
Installation	Maximum load
Trimless	8Kg
Warranty	Colors
5 years	■ Black
 	□ White

ACU BSC 240000R

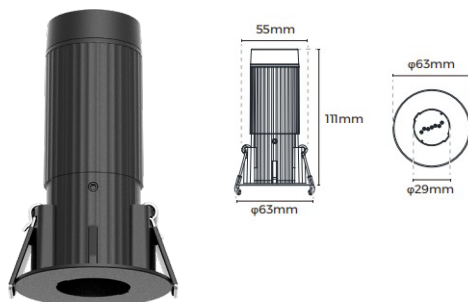

Wattage	Rated Current
72W	3A
Open Size	Input voltage
φ56mm	24V DC Rated
Installation	Maximum load
Recessed	1Kg
Warranty	Colors
5 years	■ Black
 	□ White



PONTO SPOT LIGHT

ACU PS 241000




Wattage	Beam angle
3W	15° 25°
Color Temperature	Lumen Output
3000k	135Lm
4000k	172Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	
24V DC	

ACU PTS 241001

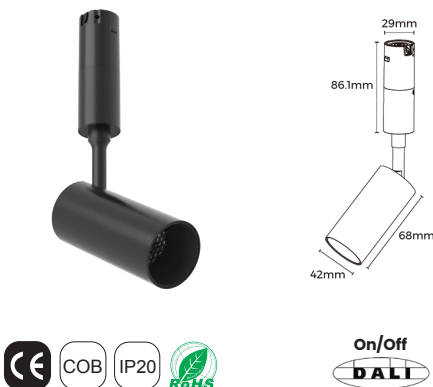

Wattage	Beam angle
6W	24° 36°
Color Temperature	Lumen Output
3000k	375Lm
4000k	500Lm , 400Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	
24V DC	

ACU PTS 241002



Wattage

14W

Beam angle

15° 24° 36°

Color Temperature

3000k

4000k

Lumen Output

1030Lm

1100Lm

Installation

On Recessed Base

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black

Input Voltage

24V DC



PONTO ZOOMABLE LIGHT

ACU PTZ 241101



Wattage	Beam angle
5W	12°-50°
Color Temperature	Lumen Output
3000k	282Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	
24V DC	

ACU PTZ 241102




Wattage	Beam angle
12W	15°-36°
Color Temperature	Lumen Output
3000k	660Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	
24V DC	

PONTO LINEAR


ROUND TUBE LIGHT

ACU PTL 241201

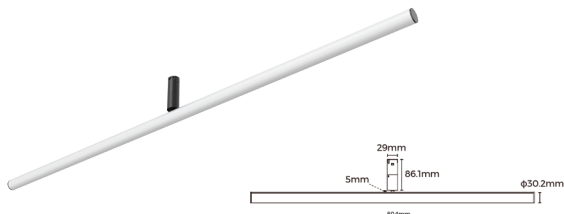

Wattage	Beam angle
12W	200° x 110°
Color Temperature	Lumen Output
3000k	1128Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Length
24V DC	604mm

ACU PTL 241202

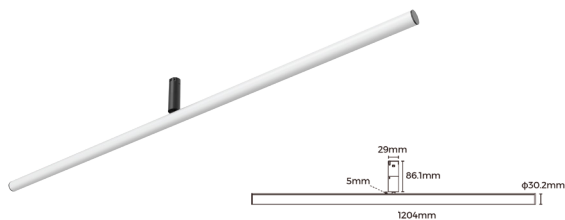


Wattage	Beam angle
24W	200° x 110°
Color Temperature	Lumen Output
3000k	2256Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR


With Normal Diffuser

ACU PTL 241301

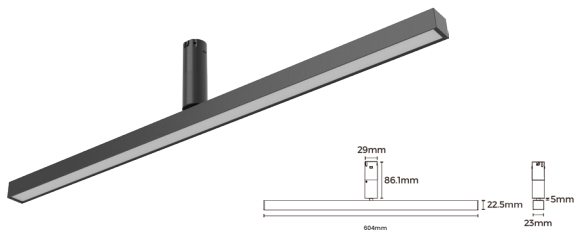

Wattage	Beam angle
12W	110°
Color Temperature	Lumen Output
3000k	840Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm

ACU PTL 241302

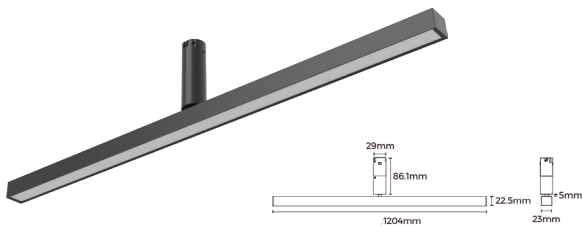


Wattage	Beam angle
24W	110°
Color Temperature	Lumen Output
3000k	1680Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR


With Prismatic Diffuser

ACU PTL 241401

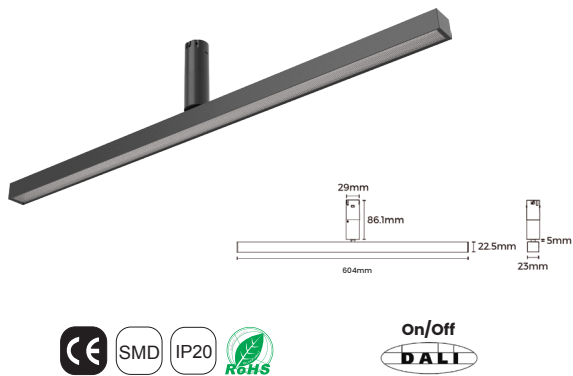

Wattage	Beam angle
12W	70°
Color Temperature	Lumen Output
3000k	900Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm

ACU PTL 241402

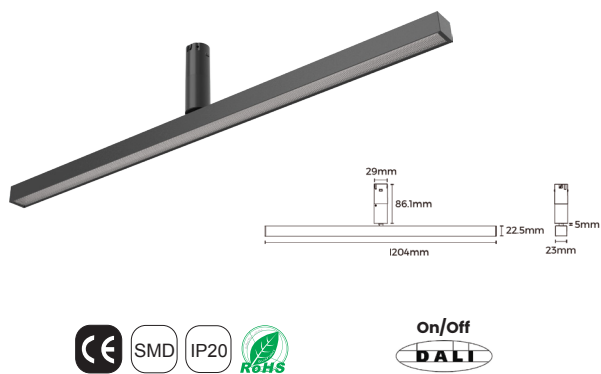


Wattage	Beam angle
24W	70°
Color Temperature	Lumen Output
3000k	1800Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR


Grating Diffuser

ACU PTL 241501

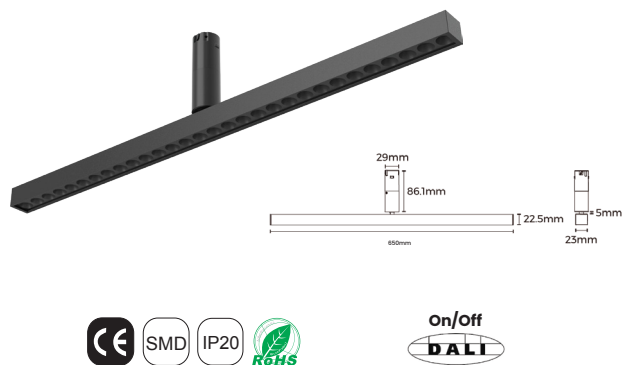

Wattage	Beam angle
13W	30°
Color Temperature	Lumen Output
3000k	858Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	650mm

ACU PTL 241502

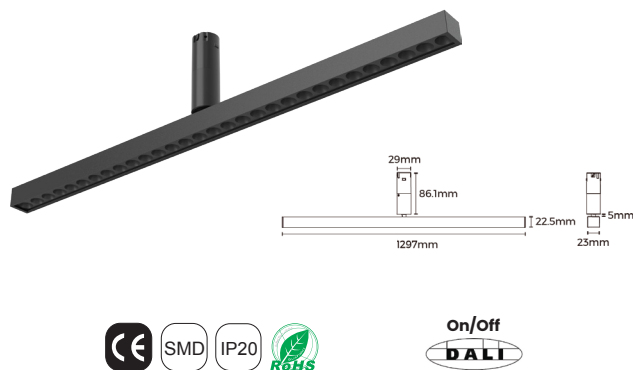


Wattage	Beam angle
26W	30°
Color Temperature	Lumen Output
3000k	1716Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1297mm

PONTO LINEAR

Asymmetric Diffuser


ACU PTL 241601

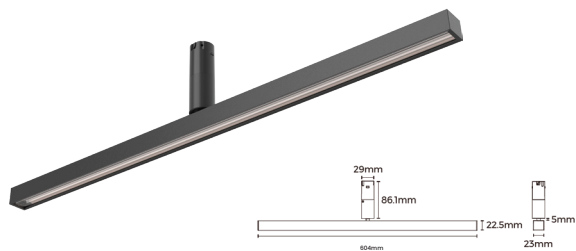

Wattage	Beam angle
12W	90° x 45° x 15°
Color Temperature	Lumen Output
3000k	1128Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm



ACU PTL 241602

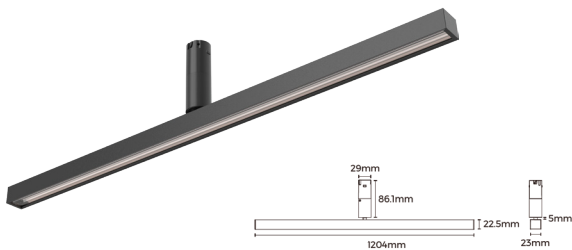


Wattage	Beam angle
24W	90° x 45° x 15°
Color Temperature	Lumen Output
3000k	2256Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR


Double Asymmetric Diffuser

ACU PTL 241701

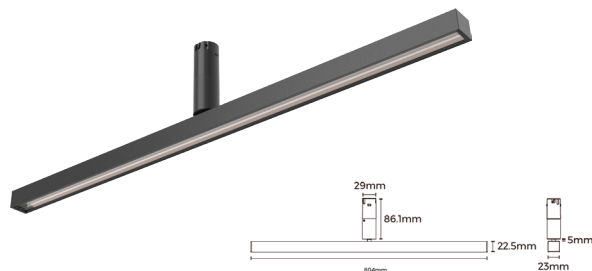

Wattage	Beam angle
12W	100° x 90° x 15°
Color Temperature	Lumen Output
3000k	1128Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm

ACU PTL 241702

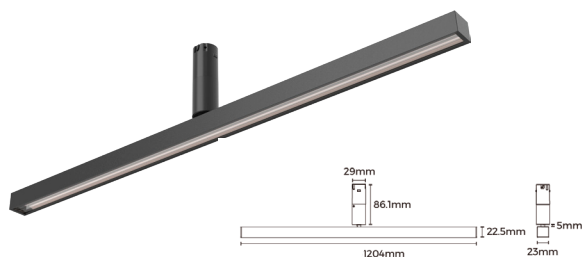


Wattage	Beam angle
24W	100° x 90° x 15°
Color Temperature	Lumen Output
3000k	2256Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm



Up-Down


Ponto Linear Light

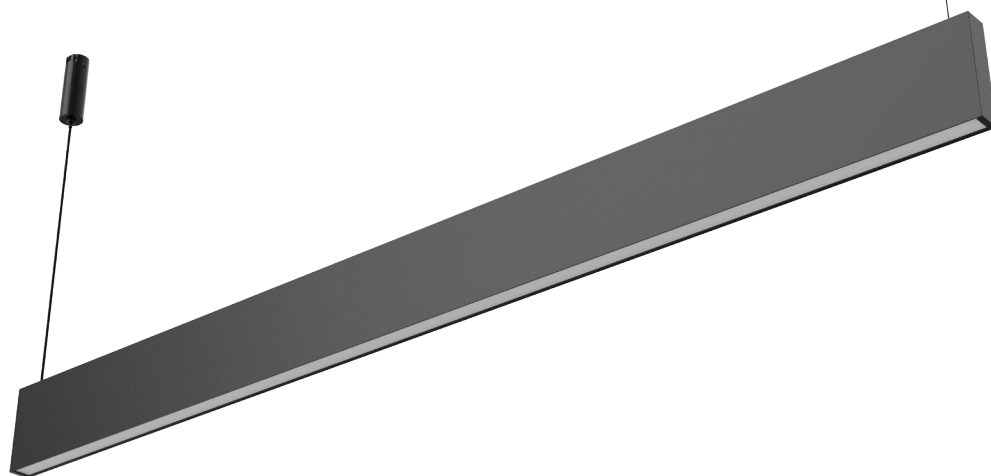

PONTO LINEAR

With Normal Diffuser

ACU PTL 241801

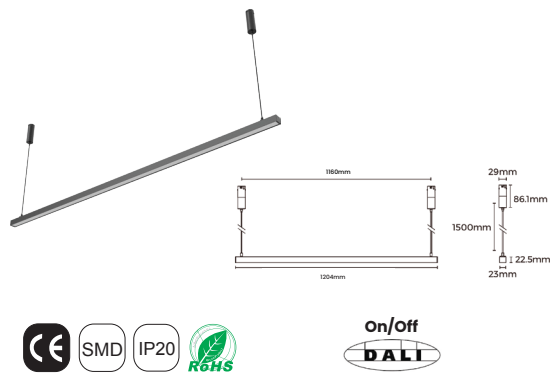


Wattage	Beam angle
24W	110°
Color Temperature	Lumen Output
3000k	1680Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR

With Prismatic Diffuser

ACU PTL 241901

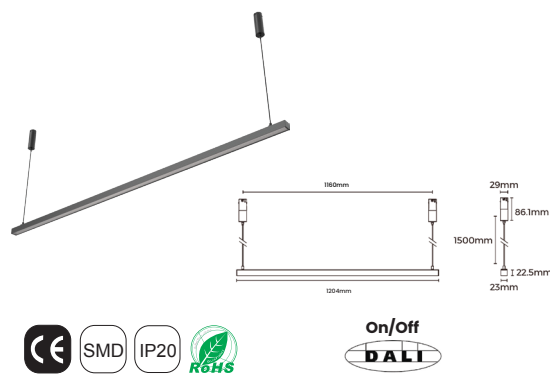


Wattage	Beam angle
24W	70°
Color Temperature	Lumen Output
3000k	1800Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR

With Grating Diffuser

ACU PTL 242001

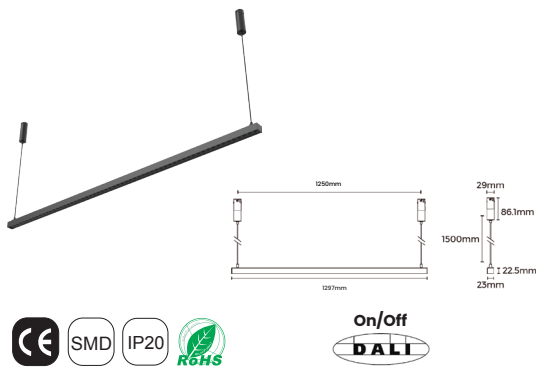


Wattage	Beam angle
26W	30°
Color Temperature	Lumen Output
3000k	1716Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1297mm

UP-DOWN PONTO LINEAR LIGHT

with Normal Diffuser

ACU PTL 242101

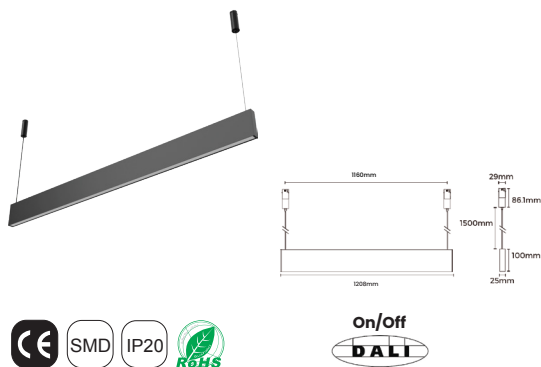


Wattage	Beam angle
48W	Up: 100° , Down: 100°
Color Temperature	Lumen Output
3000k	2688Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1208mm

UP-DOWN PONTO LINEAR LIGHT

With Prismatic Diffuser

ACU PTL 242201

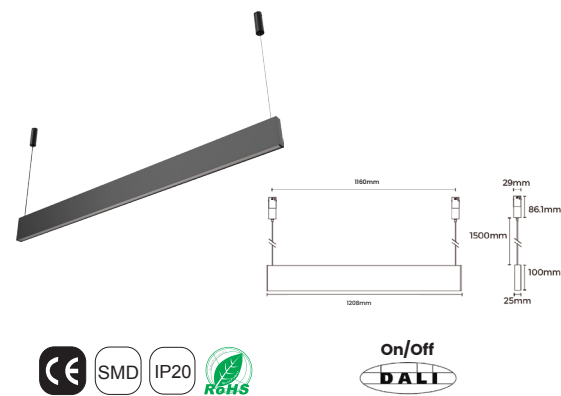


Wattage	Beam angle
48W	Up: 100° , Down: 100°
Color Temperature	Lumen Output
3000k	2784Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1208mm

UP-DOWN PONTO LINEAR LIGHT

With Grating Diffuser


ACU PTL 242301

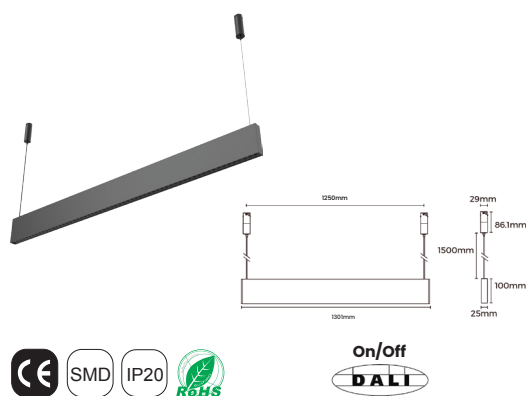

Wattage	Beam angle
53W	Up:100° , Down: 100°
Color Temperature	Lumen Output
3000k	2703Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1301mm


PONTO WALL WASHER

ACU WW 242401

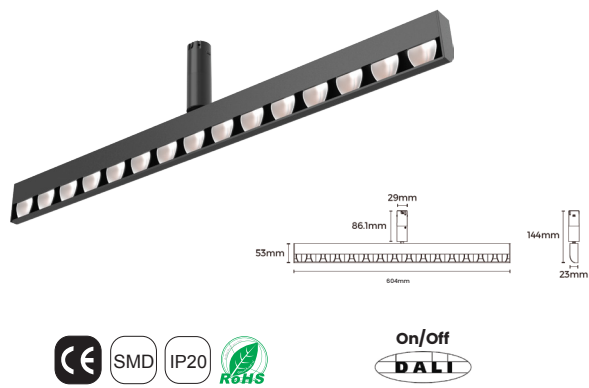

Wattage	Beam angle
10W	60° X 25° X 73°
Color Temperature	Lumen Output
3000k	846Lm
4000k	900Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm

ACU WW 242402

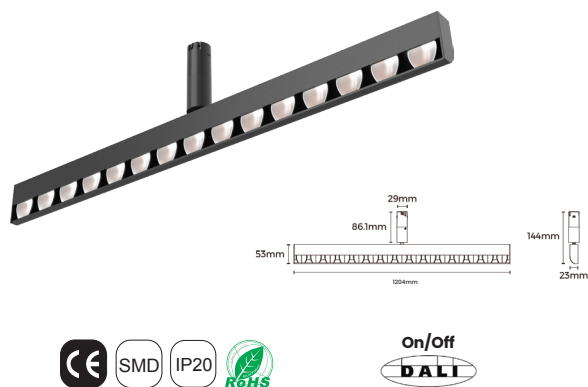


Wattage	Beam angle
20W	60° X 25° X 73°
Color Temperature	Lumen Output
3000k	1692Lm
4000k	1800Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO ROUND LIGHT


Neon Flex

ACU WW 242501

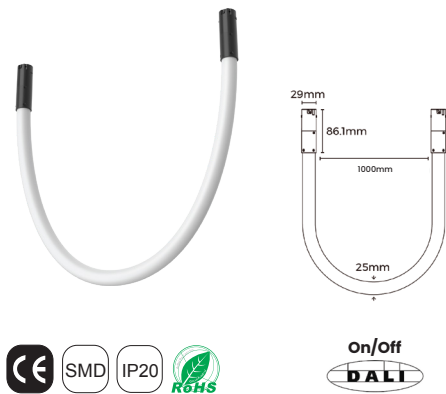

Wattage	Beam angle
14W	360°
Color Temperature	Lumen Output
3000k	920Lm
4000k	980Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Length
24V DC	1000mm

ACU WW 242502

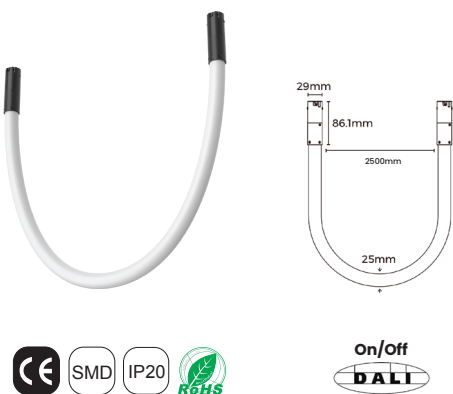

Wattage	Beam angle
35W	360°
Color Temperature	Lumen Output
3000k	2300Lm
4000k	2450Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Length
24V DC	2500mm

PONTO ROUND LIGHT

Neon Flex

ACU WW 242503



Wattage	Beam angle
70W	360°
Color Temperature	Lumen Output
3000k	4600Lm
4000k	4900Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Length
24V DC	5000mm






EMBRACE THE LIGHT



www.acumenlight.com

PONTO DECORATIVE SUSPENDED LIGHT

ACU PTD 242601

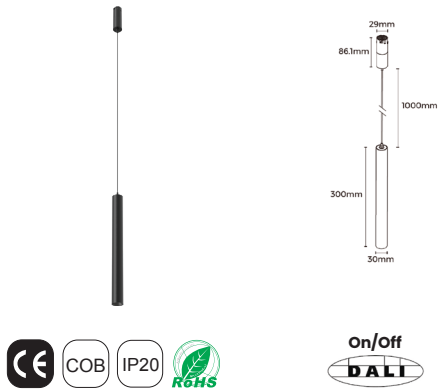

Wattage	Beam angle
6W	24°
Color Temperature	Lumen Output
3000k	370Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable

ACU PTD 242602




Wattage	Beam angle
6W	24°
Color Temperature	Lumen Output
3000k	370Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable



PONTO DECORATIVE SUSPENDED LIGHT

Neon Flex

ACU PTD 242603

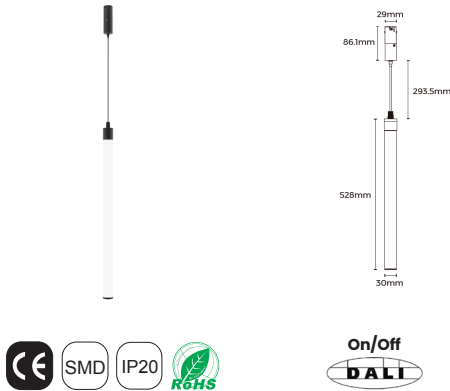

Wattage	Beam angle
7W	360°
Color Temperature	Lumen Output
3000k	460Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable

ACU PTD 242604



Wattage	Beam angle
6W	360°
Color Temperature	Lumen Output
3000k	560Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable



PONTO DECORATIVE SUSPENDED LIGHT

ACU PTD 242605



Wattage	Beam angle
4W	110°
Color Temperature	Lumen Output
3000k	340Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable

PONTO DECORATIVE SUSPENDED LIGHT

ACU PTD 242606



Wattage	Beam angle
3W	110°
Color Temperature	Lumen Output
1500k	170Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable





    @acumenlight
www.acumenlight.com