

www.acumenlight.com



Wall & Stair Light CATALOGUE

CATA
LOGUE
**Wall
& Stair Light**


Wall & Stair

ACU OSR 182036



Wattage	Beam angle
5.7W	N/A
Color Temperature	Lumen Output
3000k	104Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


ACU OSR 182037

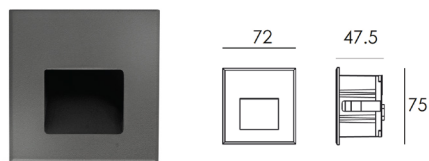

Wattage	Beam angle
3x0.7W	120°
Color Temperature	Lumen Output
3000k	36Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey □ White ■ Black
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


Wall & Stair

ACU OSR 182038

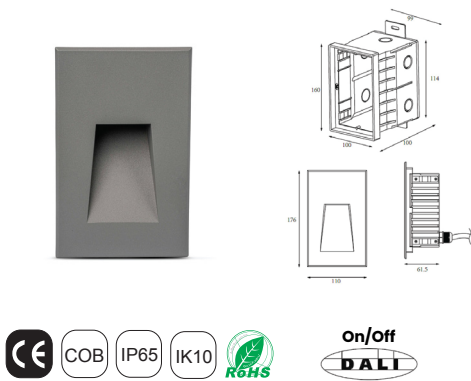

Wattage	Beam angle
18x0.2W	120°
Color Temperature	Lumen Output
3000k	85Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey ■ Black
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


ACU OSR 182039

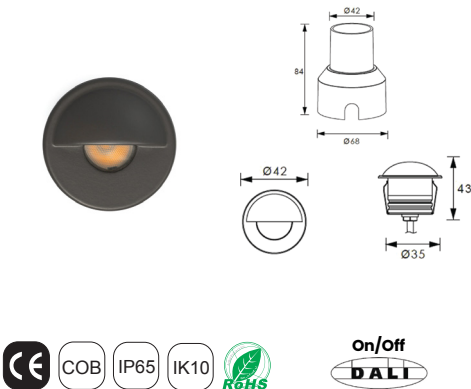

Wattage	Beam angle
1x1W	32°
Color Temperature	Lumen Output
3000k	28Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
24V DC	Die Casting Powder Coated Aluminum

Wall & Stair

ACU OSR 182040



COB


IP65

IK10



Wattage	Beam angle
1x2W	22°
Color Temperature	Lumen Output
3000k	51Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
24V DC	Die Casting Powder Coated Aluminum

ACU OSR 182041



COB

IP65

IK10



Wattage	Beam angle
1x5W	18° 24° 32°
Color Temperature	Lumen Output
3000k	208Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
24V DC	Die Casting Powder Coated Aluminum




Wall & Stair

ACU OSR 216001



Wattage	Beam angle
30x0.3W	2/A°
Color Temperature	Lumen Output
3000k	400Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die-casting Aluminum



ACU OSR 216002

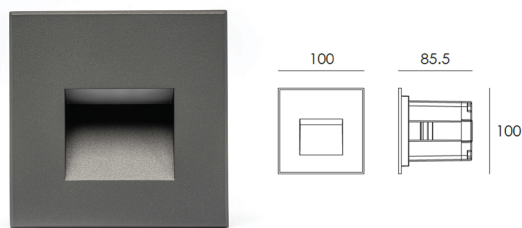

Wattage	Beam angle
10x0.5W	N/A
Color Temperature	Lumen Output
3000k	112Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die-casting Aluminum



Wall & Stair

ACU OSR 216003R



Wattage	Beam angle
9x0.5W	N/A
Color Temperature	Lumen Output
3000k	158Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die-casting Aluminum

ACU OSM 216003S




Wattage	Beam angle
9x0.5W	N/A
Color Temperature	Lumen Output
3000k	158Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die-casting Aluminum





Wall & Stair

ACU OSR 216004



Wattage	Beam angle
1W	80°
Color Temperature	Lumen Output
3000k	46Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Stainless Steel Cover with Matt Cover

ACU OSR 216005



Wattage	Beam angle
12x0.5W	N/A
Color Temperature	Lumen Output
3000k	127Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die-casting Aluminum


Wall & Stair

ACU OW 182042



Wattage	Beam angle
1x12W	10°
Color Temperature	Lumen Output
3000k	≈444Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Black ■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


ACU OW 182043

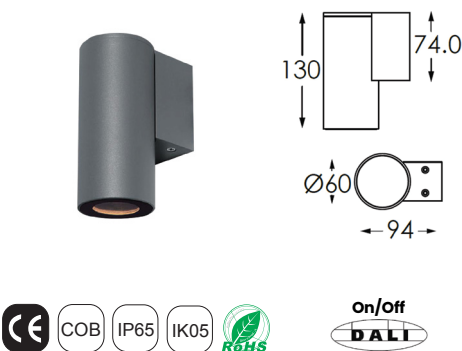

Wattage	Beam angle
1x4.5W	15° 24° 38°
Color Temperature	Lumen Output
3000k	254Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


Wall & Stair

ACU OW 182044

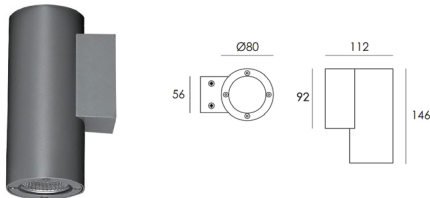

Wattage	Beam angle
1x10W	15° 24° 38° 60°
Color Temperature	Lumen Output
3000k	1170Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


ACU OW 182045

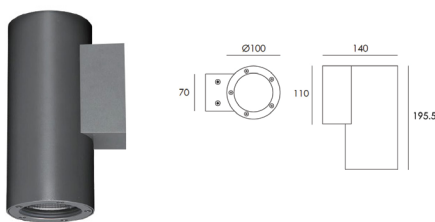

Wattage	Beam angle
1x18W	12° 22° 38° 55°
Color Temperature	Lumen Output
3000k	1847Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


Wall & Stair

ACU OW 182046

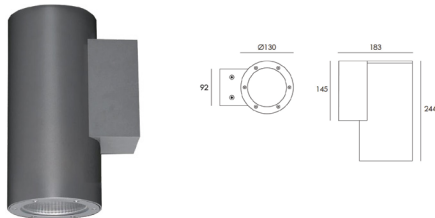

Wattage	Beam angle
1x25W	10° 22° 38°
Color Temperature	Lumen Output
3000k	2967Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


ACU OW 182047

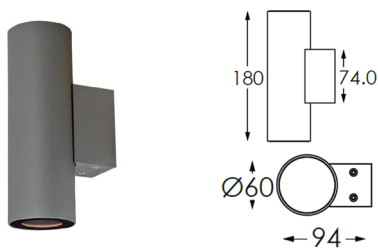

Wattage	Beam angle
2x4.5W	12° 22° 38° 55°
Color Temperature	Lumen Output
3000k	254x2Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey ■ Black
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


Wall & Stair

ACU OW 182048

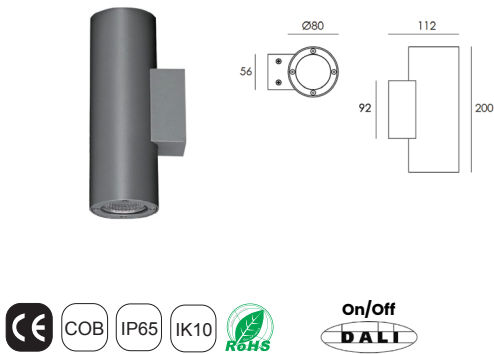

Wattage	Beam angle
2x8W	15° 24° 38° 60°
Color Temperature	Lumen Output
3000k	1972Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


ACU OW 182049

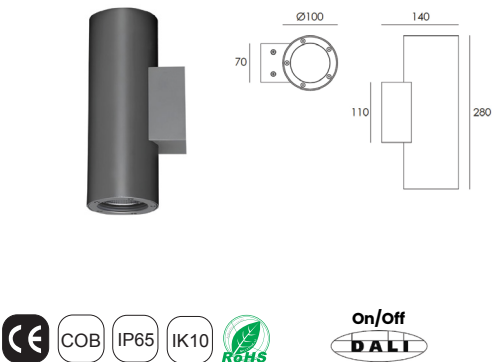

Wattage	Beam angle
2x12W	12° 22° 38° 55°
Color Temperature	Lumen Output
3000k	2158Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


Wall & Stair

ACU OW 182050

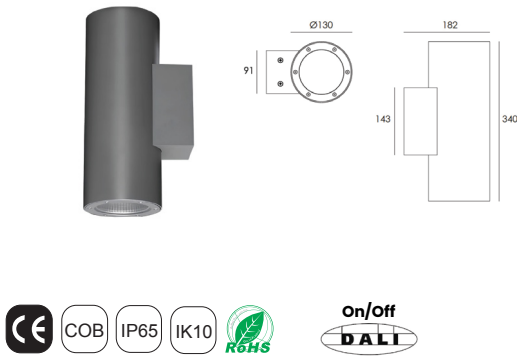

Wattage	Beam angle
2x18W	10° 22° 38°
Color Temperature	Lumen Output
3000k	4072Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum

ACU OW 182051

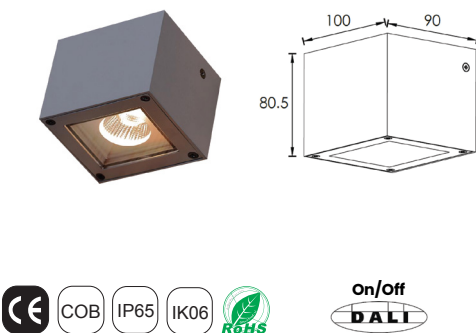

Wattage	Beam angle
1x6W	18° 25° 40°
Color Temperature	Lumen Output
3000k	651Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey □ White ■ Black
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum

Wall & Stair

ACU OW 182051N



Wattage	Beam angle
1x3W	10°
Color Temperature	Lumen Output
3000k	67Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey ■ Black
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


ACU OW 182052



Wattage	Beam angle
2x6W	18° 25° 40°
Color Temperature	Lumen Output
3000k	13021Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum

Wall & Stair

ACU OW 182052N

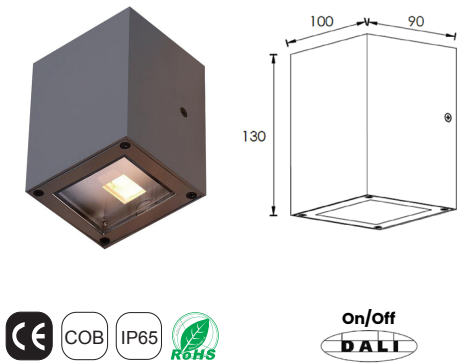

Wattage	Beam angle
2x3W	10°
Color Temperature	Lumen Output
3000k	69Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey □ White ■ Black
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum



Instagram Twitter Facebook LinkedIn @acumenlight
www.acumenlight.com