





CATA LOGUE **Pavo**

Pavo


Pavo Adjustable

ACU 200901



Wattage	Beam angle
3x2 W	12° 34° 48°
Color Temperature	Lumen Output
3000k	450 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
220V AC with Remote Attached Driver	Powder Coated Aluminum
Dimention	Cutting Section
L 106 x W 60 x H 50.5 mm	CutOut L97 x W49mm

ACU 200902





Wattage	Beam angle
6x2 W	12° 24° 34° 48°
Color Temperature	Lumen Output
3000k	900 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	☒ Black ☐ White
Input Voltage	Material
220V AC with Remote Attached Driver	Powder Coated Aluminum
Dimention	Cutting Section
L 186.5 x W 60 x H 50.5mm	Cutout L180x W50mm

Pavo

Pavo Wall Washer

ACU 200903



Wattage

5x2 W

Beam angle

100°

Color Temperature

3000k

Lumen Output

750 Lm

Installation

Recessed

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC with
Remote Attached Driver

Material

Powder Coated
Aluminum


Dimention

L 147 x W 45 x H 39 mm

Cutting Section

CutOut L132 x W36mm

ACU 200904



Wattage

10x2 W

Beam angle

100°

Color Temperature

3000k

Lumen Output

1500 Lm

Installation

Recessed

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC with
Remote Attached Driver

Material

Powder Coated
Aluminum

Dimention

L 278 x W 46 x H 36 mm

Cutting Section


CutOut L269 x W36mm



Pavo

Pavo Wall Washer

ACU 200905

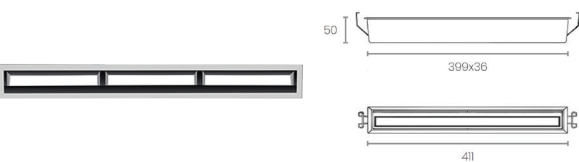

Wattage	Beam angle
---------	------------

15x2 W	100°
--------	------

Color Temperature	Lumen Output
-------------------	--------------

3000k	2250 Lm
-------	---------

Installation	Rated life hours
--------------	------------------

Recessed	30000-50000H
----------	--------------

CRI	Colors
-----	--------

≥90	□ White
-----	---------

Input Voltage	Material
---------------	----------

220V AC with Remote Attached Driver	Powder Coated Aluminum
-------------------------------------	------------------------


Dimention	Cutting Section
-----------	-----------------

L 411 x W 36 x H 50 mm	CutOut L399x W36 mm
------------------------	---------------------

Pavo

Pavo DownLight

ACU S 18104

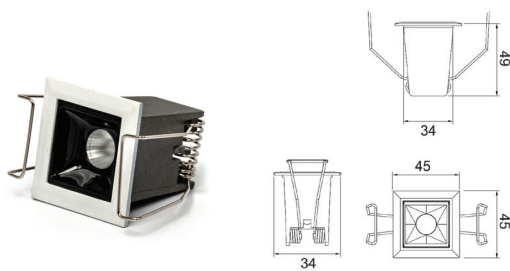

Wattage	Beam angle
---------	------------

2 W	12° 30°
-----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	185 Lm
-------	--------

Installation	Rated life hours
--------------	------------------

Recessed	30000-50000H
----------	--------------

CRI	Colors
-----	--------

≥90	□ White
-----	---------

Input Voltage	Material
---------------	----------

220V AC with Remote Attached Driver	Powder Coated Aluminum
-------------------------------------	------------------------


Dimention	Cutting Section
-----------	-----------------

L 45 x W 45 x H 49 mm	L34 x W34 mm
-----------------------	--------------

Pavo

Pavo DownLight

ACU S 18105

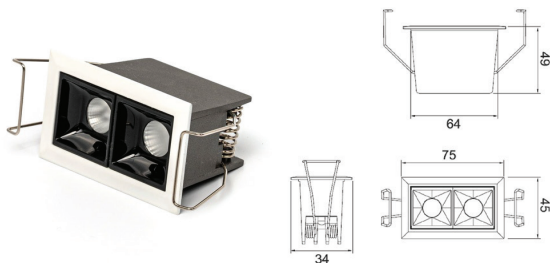


Wattage	Beam angle
2x2 W	12° 30°
Color Temperature	Lumen Output
3000k	370 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with Remote Attached Driver	Powder Coated Aluminum
Dimention	Cutting Section
L 75 x W 45 x H 49 mm	CutOut L68 x W37mm

Pavo

Pavo DownLight

ACU S 18106

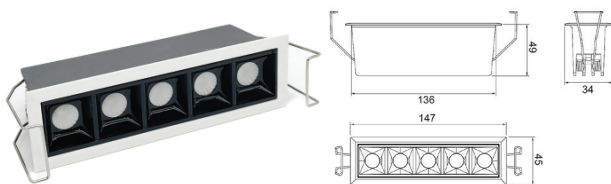


Wattage	Beam angle
5x2 W	12° 30°
Color Temperature	Lumen Output
3000k	925 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with Remote Attached Driver	Powder Coated Aluminum
Dimention	Cutting Section
L 147x W 45x H 49 mm	CutOut L140x W37mm



Pavo

Pavo DownLight

ACU S 18107

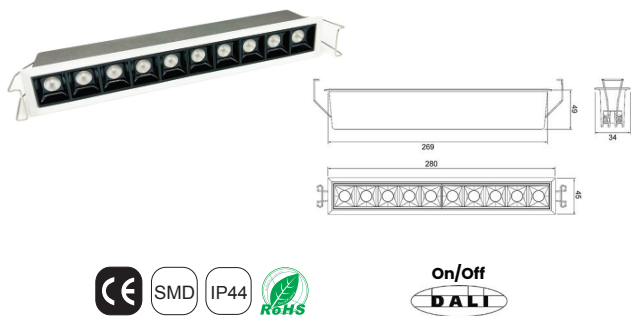


Wattage	Beam angle
10x2 W	12° 30°
Color Temperature	Lumen Output
3000k	1850 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with Remote Attached Driver	Powder Coated Aluminum
Dimension	Cutting Section
L 280 x W 45 x H 49 mm	CutOut L273 x W37mm

Pavo

Pavo DownLight

ACU S 18108

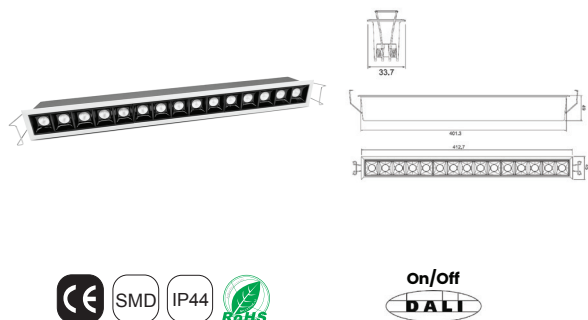

Wattage	Beam angle
15x2 W	12° 30°
Color Temperature	Lumen Output
3000k	2775 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	□ White
Input Voltage	Material
220V AC with Remote Attached Driver	Powder Coated Aluminum
Dimension	Cutting Section
L 412.7 x W 45 x H 49 mm	L401.3 x W33.7 mm



    @acumenlight

www.acumenlight.com