

www.acumenlight.com



ACUMEN

BOLLARD CATALOGUE

CATA LOGUE Bollard

Bollard

Landscape Light

ACU OB 182071



Wattage	Beam angle
5 W	Asymmetric
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum + PC
CRI	Colors
≥80	■ Black
Dimention	Input Voltage
L 105.5 x W 104.5 x H 600 mm	220V AC

ACU OB 182072



Wattage	Beam angle
7 W	120°
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum + PC
CRI	Colors
≥80	■ Black
Dimention	Input Voltage
Φ110 mm, L 775 mm	220V AC

Bollard

Landscape Light

ACU OB 182073-1



Wattage	Beam angle
7 W	Asymmetric
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum + PC
CRI	Colors
≥80	■ Black
Dimention	Input Voltage
L 60 x W 120 x H 400 mm	220V AC

ACU OB 182073-2



Wattage	Beam angle
7 W	Asymmetric
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum + PC
CRI	Colors
≥80	■ Black
Dimention	Input Voltage
L 60 x W 120 x H 600 mm	220V AC



Bollard



Bollard

Landscape Light

ACU OB 182073-3



Wattage	Beam angle
7 W	Asymmetric
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum + PC
CRI	Colors
≥80	■ Black
Dimention	Input Voltage
L 60 x W 120 x H 800 mm	220V AC

ACU OB 182075-1




Wattage	Beam angle
8.4 W	N/A
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum sheel & Glass
CRI	Colors
≥80	■ Black
Dimention	Input Voltage
Φ120 x H 400mm , Base Φ150 mm	220V AC

Bollard

Landscape Light

ACU OB 182075-2

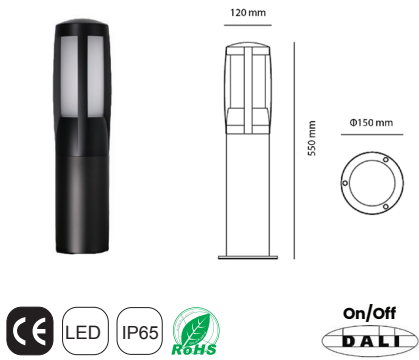

Wattage	Beam angle
16.8 W	N/A
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum sheel & Glass
CRI	Colors
≥80	■ Black
Dimention	Input Voltage
Φ120 x H 550mm , Base Φ150 mm	220V AC



Instagram Twitter Facebook LinkedIn @acumenlight
www.acumenlight.com