

OUTDOOR LIGHTING

ACUMEN

www.acumenlight.com

A photograph of a modern building at night, featuring a large, illuminated entrance and a balcony with glass railings. The building's facade is lit with warm, ambient light, and the entrance area is brightly lit. The overall scene is dark, with the building's lights providing the primary illumination.

ACUMEN Outdoor lighting

These set of products brighten up and bring life to outdoor spaces of residential and commercial buildings with simple, and elegant modern outdoor lighting fixtures that are designed to illuminate and inspire. It enhances the beauty of any property while providing safety and security.

There are different types, shapes, and styles available, which can match with and add value to architecture and landscapes. Additionally, we offer the opportunity to adjust or select colour temperatures flexibly for various applications. Weather-proof materials will protect the products and maintain their efficient work.

The best lighting solutions conserve less energy, but LED light sources can provide very high luminance levels which may cause glare. For this reason, ACUMEN LED fixtures are commonly equipped with anti-glare accessories to reduce this unpleasant visual effect.

UP LIGHT

The Up light Series for outdoor in-ground installation represent essential fixtures for lighting architectural elements or trees. Different wattage and shape types make the selection of an applicable product easier. Available with special components that provide visual comfort.



Up Light

Surface Mounted

ACU OSM 182015



Wattage	Beam angle
1x5W	18° 23° 24
Color Temperature	Lumen Output
3000k	≈460 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Material
220V AC	Powder Coated Aluminum

Recessed Inground

ACU OU 182001M




Wattage	Beam angle
1x0.5W	70°
Color Temperature	Lumen Output
3000k	≈23 Lm
Installation	Rated life hours
Recessed Inground	30000-50000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Material
24V DC	Stainless Steel with Powder Coated Aluminum

Up Light

Recessed Inground


ACU OU 182001MS

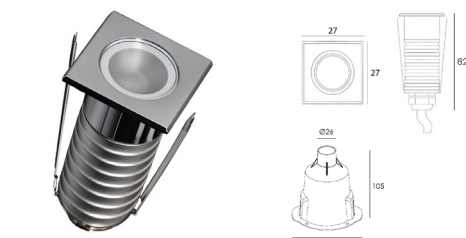

Wattage	Beam angle
1x0.5W	70 °
Color Temperature	Lumen Output
3000k	≈23Lm
Installation	Rated life hours
Recessed Inground	30000-50000H
CRI	Colors
≥90	■ Chrome Finish

Input Voltage	Material
24V DC	Front Cover: Hard Chormeplated Stainless Steel Body/Housing: Powder Coated Aluminum

ACU OU 182001H

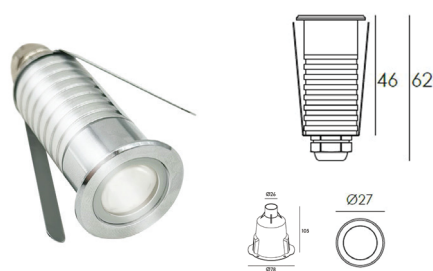

Wattage	Beam angle
1x1.5W	10° 15° 20° 30
Color Temperature	Lumen Output
3000k	≈136Lm
Installation	Rated life hours
Recessed Inground	30000-50000H
CRI	Colors
≥90	■ Chrome Finish

Input Voltage	Material
24V DC 3V DC	Front Cover: Hard Chormeplated Stainless Steel Body/Housing: Powder Coated Aluminum

Up Light

Recessed Inground

ACU OU 182001SH



Wattage	Beam angle
1x1.5W	10° 15° 20° 30°
Color Temperature	Lumen Output
3000k	≈136 Lm
Installation	Rated life hours
Recessed Inground	30000-50000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Material
24V DC	Front Cover: Hard Chormeplated Stainless Steel Body/Housing: Powder Coated Aluminum

ACU OU 182002A



Wattage	Beam angle
1x2W	Asymmetrical 35° / 45°
Color Temperature	Lumen Output
3000k	≈ 130
Installation	Rated life hours
Recessed Inground	30000-50000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Material
220V AC	Front Cover: Hard Chormeplated Stainless Steel Body/Housing: Powder Coated Aluminum



Up Light

Recessed Inground

ACU OU 182002H



Wattage	Beam angle
---------	------------

1x2W	15° 20° 30° 45°
------	-----------------

Color Temperature	Lumen Output
-------------------	--------------

3000k	≈ 143Lm
-------	---------

Installation	Rated life hours
--------------	------------------

Recessed Inground	30000-50000H
-------------------	--------------


CRI	Colors
-----	--------

≥90	☐ Chrome Finish
-----	--

Input Voltage	Material
---------------	----------

220V AC	Front Cover: Hard Chormeplated Stainless Steel Body/Housing :Powder Coated Aluminum
---------	---

ACU OU 182002SH

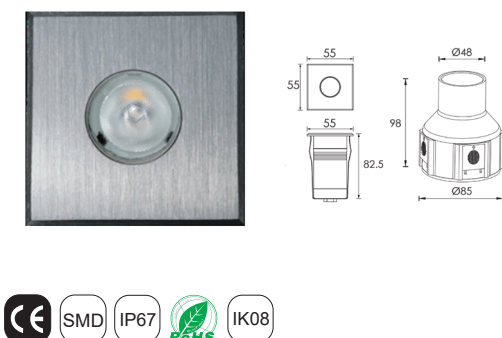

Wattage	Beam angle
---------	------------

1x2W	9° 15° 20° 30° 45°
------	--------------------

Color Temperature	Lumen Output
-------------------	--------------

3000k	≈ 143Lm
-------	---------

Installation	Rated life hours
--------------	------------------

Recessed Inground	30000-50000H
-------------------	--------------

CRI	Colors
-----	--------

≥90	☐ Chrome Finish
-----	--


Input Voltage	Material
---------------	----------

220V AC	Front Cover: Hard Chormeplated Stainless Steel Body/Housing: Powder Coated Aluminum
---------	---

Up Light

Recessed Inground

ACU OU 182003MH

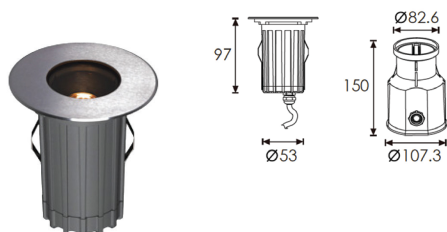

Wattage

1x4W

Beam angle

9° 15° 20° 30° 45°

Color Temperature

3000k

Lumen Output

≈200Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish


Input Voltage

220V AC

Material

Front Cover: Hard
Chormeplated Stainless
Steel
Body/Housing: Powder
Coated Aluminum

ACU OU 182003H

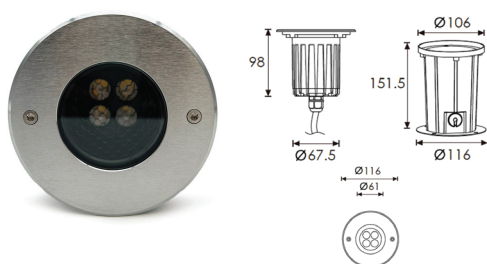

Wattage

4x2W

Beam angle

15° 20° 30° 45°

Color Temperature

3000k

Lumen Output

≈488 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

220V AC

Material



Front Cover: Hard
Chormeplated Stainless
Steel
Body/Housing: Powder
Coated Aluminum



Up Light

Recessed Inground

ACU OU 182003MSH



Wattage

1x4W

Beam angle

9° 15° 20° 30° 45°

Color Temperature

3000k

Lumen Output

≈200 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish


Input Voltage

220V AC

Material

Front Cover: Hard
Chormeplated Stainless
Steel
Body/Housing: Powder
Coated Aluminum

ACU OU 182003SH



Wattage

4x2W

Beam angle

10° 15° 20° 30°

Color Temperature

3000k

Lumen Output

≈488 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

□ Chrome Finish

Input Voltage

220V AC


Material

Front Cover : Hard
Chormeplated Stainless
Steel
Body/Housing: Powder
Coated Aluminum

Up Light

Recessed Inground

ACU OU 182004H



Wattage

16x1.2W

Beam angle

10° 15° 20° 30°

Color Temperature

3000k

Lumen Output

≈1155 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish


Input Voltage

220V AC

Material

Front Cover : Hard
Chormeplated Stainless
Steel
Body/Housing: Powder
Coated Aluminum

ACU OU 182004SH



Wattage

16x1.2W

Beam angle

10° 15° 20° 30°

Color Temperature

3000k

Lumen Output

≈1155 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

220V AC


Material

Front Cover: Hard
Chormeplated Stainless
Steel
Body/Housing: Powder
Coated Aluminum

Up Light

Recessed Inground

ACU OU 182005H



Wattage

25x1W

Beam angle

10° 15° 20° 30°

Color Temperature

3000k

Lumen Output

≈2249Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish


Input Voltage

220V AC

Material

Front Cover: Hard
Chormeplated Stainless
Steel
Body/Housing: Powder
Coated Aluminum

ACU OU 182005SH



Wattage

25x1W

Beam angle

10° 15° 20° 30°

Color Temperature

3000k

Lumen Output

≈2249Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

220V AC

Material


Front Cover: Hard
Chormeplated Stainless
Steel
Body/Housing: Powder
Coated Aluminum



Up Light

Recessed Inground / Adjustable

ACU OU 182006H

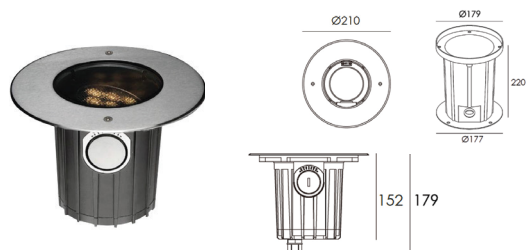

Wattage

9x1.2 W

Beam angle

10° 15° 20° 30° 50°

Color Temperature

3000k

Lumen Output

≈756 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish


Input Voltage

220V AC

Material

Front Cover: Hard
Chormeplated Stainless
Steel
Body/Housing: Powder
Coated Aluminum

ACU OU 182006SH

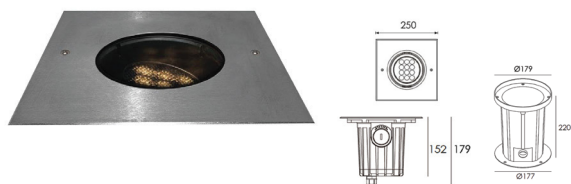

Wattage

9x1.2 W

Beam angle

15° 20° 30° 50°

Color Temperature

3000k

Lumen Output

≈756 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

220V AC


Material

Front Cover: Hard
Chormeplated Stainless
Steel
Body/Housing: Powder
Coated Aluminum

Up Light

Recessed Inground / Adjustable

ACU OU 182007H

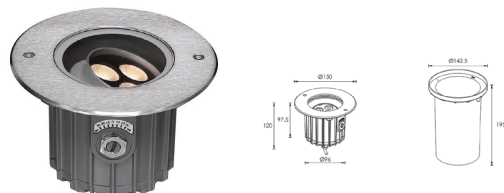

Wattage

3x2W

Beam angle

15°

Color Temperature

3000k

Lumen Output

282 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage


220V AC

Material

Front Cover: Hard
Chormeplated Stainless
Steel
Body/Housing: Powder
Coated Aluminum

Wooden Up Light

ACU OU 182009H

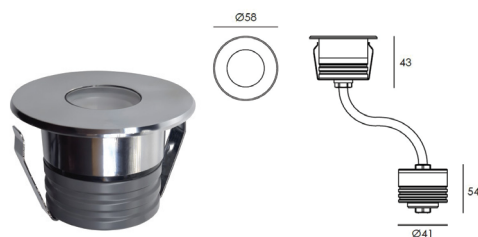

Wattage

1x2W

Beam angle

9° 20°

Color Temperature

3000k

Lumen Output

140 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

24V DC
220V AC



Material

Front Cover : Hard
Chormeplated
Stainless Steel
Body / Housing :Powder
Coated Aluminum

Up Light

Wooden Up Light

ACU OU 182010



Wattage

3x2W

Beam angle

9°

Color Temperature

3000k

Lumen Output

388 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage


24V DC
220V AC

Material

Front Cover: Hard
Chormeplated
Stainless Steel
Body / Housing :Powder
Coated Aluminum

Wooden Up Light

ACU OU 182011H



Wattage

6×2W

Beam angle

15° 30°

Color Temperature

3000k

Lumen Output

977 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

24V DC
220V AC


Material

Front Cover : Hard
Chormeplated
Stainless Steel
Body / Housing: Powder
Coated Aluminum

Up Light

Recessed Inground / Adjustable

ACU OU 183003A

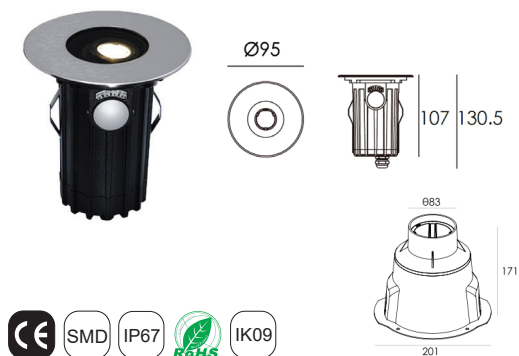

Wattage

1x2W

Beam angle

Asymmetrical 15° / 32°

Color Temperature

3000k

Lumen Output

≈112 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish


Input Voltage

220V AC

Material

Front Cover : Hard
Chormeplated
Stainless Steel
Body / Housing : Powder
Coated Aluminum

ACU OU 183003H

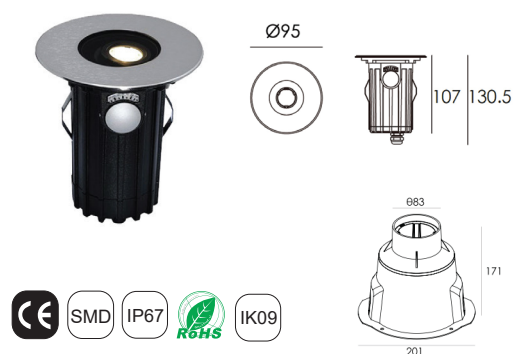

Wattage

1x2W

Beam angle

13° 20° 25° 30°

Color Temperature

3000k

Lumen Output

≈112 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

220V AC


Material

Front Cover : Hard
Chormeplated
Stainless Steel
Body / Housing : Powder
Coated Aluminum

Up Light

Recessed Inground

ACU OU 183003SH

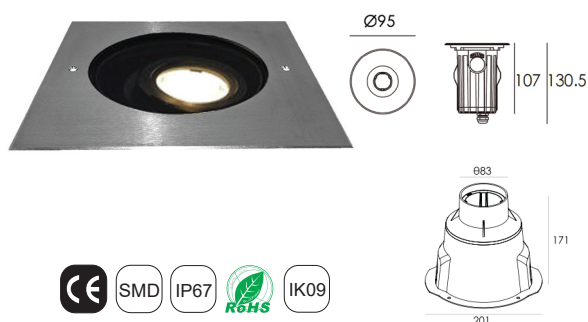

Wattage

1x2W

Beam angle

13° 25° 30°

Color Temperature

3000k

Lumen Output

≈112 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage


220V AC

Material

Front Cover : Hard
Chormeplated
Stainless Steel
Body / Housing :Powder
Coated Aluminum

Adjustable

ACU OU 183004H

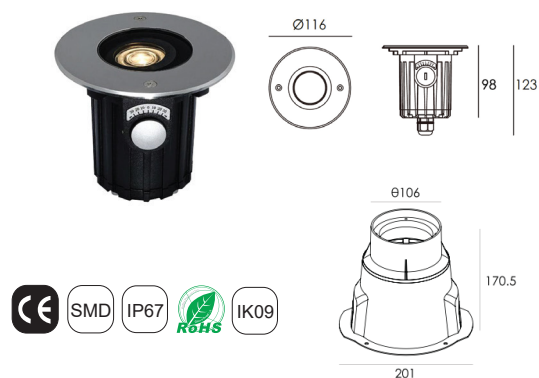

Wattage

2x1.5W

Beam angle

9° 15° 20° 30

Color Temperature

3000k

Lumen Output

≈300 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

220V AC


Material

Front Cover : Hard
Chormeplated
Stainless Steel
Body / Housing :Powder
Coated Aluminum

Up Light

Adjustable

ACU OU 183005H

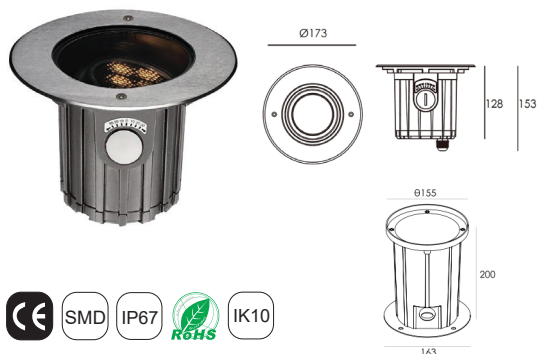

Wattage

6x1.2W

Beam angle

15° 20° 30° 50°

Color Temperature

3000k

Lumen Output

≈570 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

220V AC

Material

Front Cover : Hard
Chormeplated
Stainless Steel
Body / Housing :Powder
Coated Aluminum

Adjustable

ACU OU 183007H



Wattage

12x1.5W

Beam angle

13° 25° 30°

Color Temperature

3000k

Lumen Output

≈1389Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

220V AC




Material

Front Cover : Hard
Chormeplated
Stainless Steel
Body / Housing :Powder
Coated Aluminum

Up Light

Adjustable

ACU OU 183007SH



Wattage

12x1.5W

Beam angle

13° 25° 30°

Color Temperature

3000k

Lumen Output

≈1389 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish



Input Voltage

220V AC

Material

Front Cover : Hard
Chormeplated
Stainless Steel
Body / Housing : Powder
Coated Aluminum

ACU OU 183008H



Wattage

12x2.2W

Beam angle

13° 25° 30°

Color Temperature

3000k

Lumen Output

≈2392 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

220V AC

Material

Front Cover : Hard
Chormeplated
Stainless Steel
Body / Housing : Powder
Coated Aluminum





OUTDOOR LINEAR


The Outdoor Linear Series with in-ground and surface mounted installation represent essential fixtures for lighting architectural elements or wall texture. Different wattage and shape types make the selection of an applicable product easier.

Available with special components that provide visual comfort.

Outdoor Linear

Outdoor Recessed Inground Linear

ACU OL 182020H



Wattage

3x2W

Beam angle

8° 13° 25° 30°

Color Temperature

3000k

Lumen Output

≈ 285 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome finish


Input Voltage

220V AC

Material

Front Cover: Chrome plated Stainless Steel
Body : Aluminum

ACU OL 182021H



Wattage

6x2W

Beam angle

8° 13° 25° 30°

Color Temperature

3000k

Lumen Output

≈733 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome finish

Input Voltage

220V AC


Material

Front Cover: Chrome plated Stainless Steel
Body : Aluminum

Outdoor Linear

Outdoor Recessed Inground Linear

ACU OL 182021A



Wattage

6x2W

Beam angle

Asymmetrical 45° / 35°

Color Temperature

3000k

Lumen Output

≈733Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome finish

Input Voltage

220V AC

Material

Front Cover: Chrome plated Stainless Steel
Body : Aluminum



Outdoor Linear


Outdoor Recessed Inground Linear

ACU OL 182022H



Wattage	Beam angle
12x1.5W	8° 20° 25° 30° 35° 45°
Color Temperature	Lumen Output
3000k	≈1020 Lm
Installation	Rated life hours
Recessed Inground	30000-50000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Material
220V AC	Front Cover: Chrome plated Stainless Steel Body : Aluminum

ACU OL 182022A

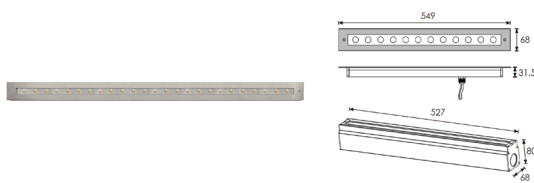


Wattage	Beam angle
12x1.5W	45° 35°
Color Temperature	Lumen Output
3000k	≈1020 Lm
Installation	Rated life hours
Recessed Inground	30000-50000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Material
220V AC	Front Cover: Chrome plated Stainless Steel Body : Aluminum

Outdoor Linear


Outdoor Recessed Inground Linear

ACU OL 182023H

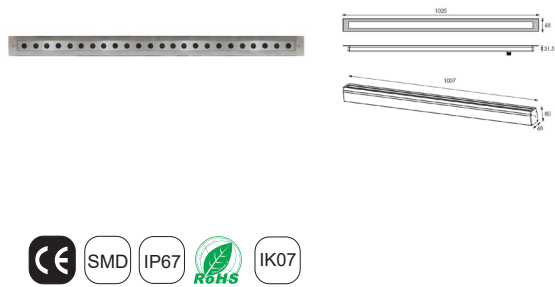

Wattage	Beam angle
24x1.5W	20° 25° 30° 35° 45°
Color Temperature	Lumen Output
3000k	≈2055 Lm
Installation	Rated life hours
Recessed Inground	30000-50000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Material
220V AC	Front Cover: Chrome plated Stainless Steel Body : Aluminum

ACU OL 182023A

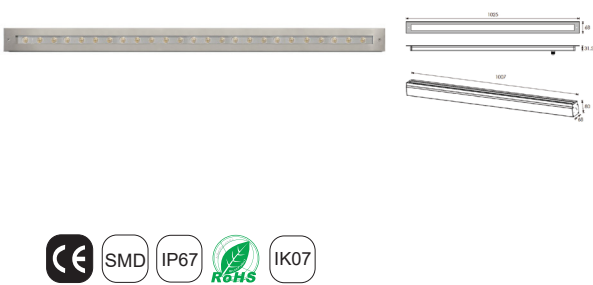


Wattage	Beam angle
24x1.5W	Asymmetrical 45° / 35°
Color Temperature	Lumen Output
3000k	≈2114 Lm
Installation	Rated life hours
Recessed Inground	30000-50000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Material
220V AC	Front Cover: Chrome plated Stainless Steel Body : Aluminum



Outdoor Linear


Outdoor Surface Mounted Linear

ACU OL 182024H

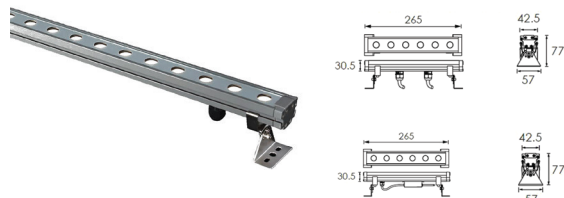

Wattage	Beam angle
6x1W	15° 20° 30° 50°
Color Temperature	Lumen Output
3000k	≈512 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Dark Gray
Input Voltage	Material
220V AC	Front Cover: Tempered Glass Body : Extruded Aluminium Anodized Finishing

ACU OL 182025H

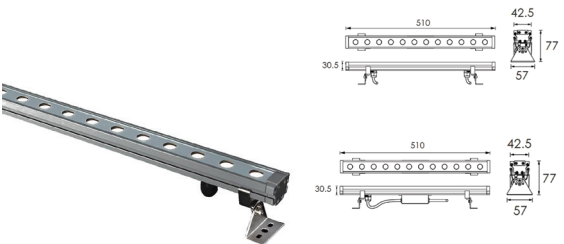

Wattage	Beam angle
12x1W	15° 20° 30° 50°
Color Temperature	Lumen Output
3000k	≈864 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Dark Gray
Input Voltage	Material
220V AC	Front Cover: Tempered Glass Body : Extruded Aluminium Anodized Finishing

Outdoor Linear


Outdoor Surface Mounted Linear

ACU OL 182026H



Wattage	Beam angle
24x1W	15° 20° 30° 50°
Color Temperature	Lumen Output
3000k	≈1976 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Dark Gray
Input Voltage	Material
220V AC 24V DC	Front Cover: Tempered Glass Body : Extruded Aluminium Anodized Finishing

ACU OL 182031H

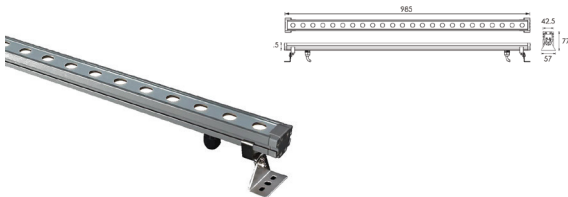


Wattage	Beam angle
48 W	30°
Color Temperature	Lumen Output
3000k	
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	□ Chrome finish
Input Voltage	Material
24V DC	Front Cover: Chrome plated Stainless Steel Body : Aluminum

Outdoor Linear


Outdoor Recessed Inground Linear

ACU OL 182080H



Wattage	Beam angle
18W	20° 25° 30° 35°
Color Temperature	Lumen Output
3000k	≈1359Lm
Installation	Rated life hours
Recessed Inground	30000-50000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Material
220V AC	Front Cover: Chrome plated Stainless Steel Body : Aluminum

ACU OL 182081H




Wattage	Beam angle
9 W	20° 25° 30° 35°
Color Temperature	Lumen Output
3000k	≈650
Installation	Rated life hours
Recessed Inground	30000-50000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Material
220V AC	Front Cover: Chrome plated Stainless Steel Body : Aluminum

Outdoor Linear

Outdoor Recessed Inground Linear

ACU OL 182082H



Wattage

9 W

Beam angle

20°

Color Temperature

3000k

Lumen Output

≈650 Lm

Installation

Recessed Inground

Rated life hours

30000-50000H

CRI

≥90

Colors

■ Chrome finish

Input Voltage

220V AC

Material

Front Cover: Chrome plated Stainless Steel
Body : Aluminum






DRIVE OVER

Designed for outdoor pathways, this guide light combines sleek functionality with an IK10 rating, ensuring reliable performance in high-traffic environments.

DRIVE OVER

ACU OU 182012


One Way

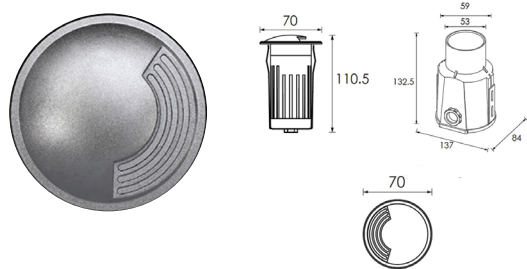

Wattage	Beam angle
1x2W	120°
Color Temperature	Lumen Output
3000k	4.3Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	Chrome finish
Input Voltage	Material
220V AC	Front Cover: Chromeplated Stainless steel, Housing : Aluminum

ACU OU 182013

Two Way

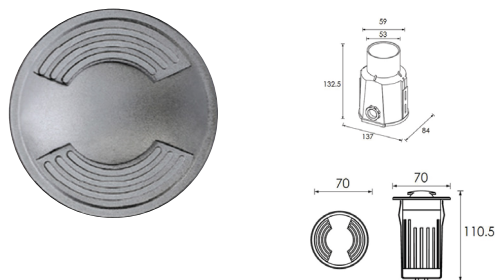


Wattage	Beam angle
1x2W	120°
Color Temperature	Lumen Output
3000k	4.3Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	Chrome finish
Input Voltage	Material
220V AC	Front Cover: Chromeplated Stainless steel, Housing : Aluminum

DRIVE OVER

ACU OU 182014

Four Way



Wattage	Beam angle
1x2W	120°
Color Temperature	Lumen Output
3000k	4.3Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	Chrome finish
Input Voltage	Material
220V AC	Front Cover: Chromeplated Stainless steel, Housing : Aluminum


WALL & STAIR LIGHT



Wall and Stair light outdoor series create a welcoming atmosphere by highlighting features of a building or structure. A variety of shapes and styles contribute to the overall architectural design of the building


Wall & Stair

ACU OSR 182036

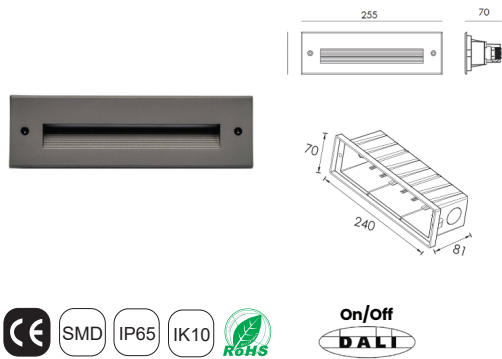


Wattage	Beam angle
5.7W	N/A
Color Temperature	Lumen Output
3000k	104Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum

ACU OSR 182037

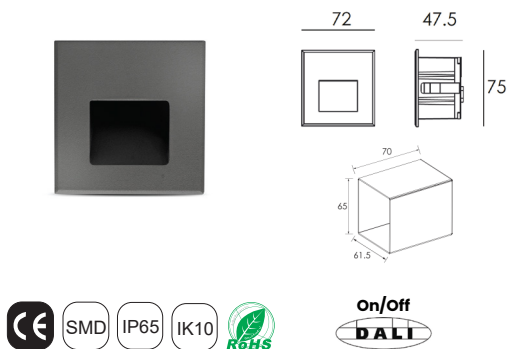


Wattage	Beam angle
3x0.7W	120°
Color Temperature	Lumen Output
3000k	36Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey □ White ■ Black
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum

Wall & Stair

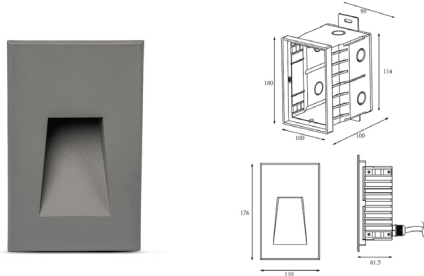ACU OSR 182038


Wattage	Beam angle
18x0.2W	120°
Color Temperature	Lumen Output
3000k	85Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey ■ Black
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum

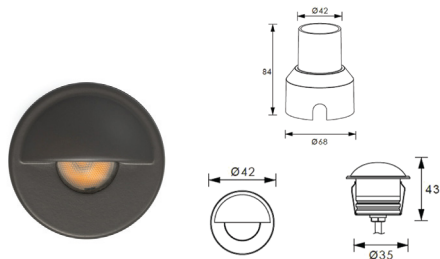ACU OSR 182039

Wattage	Beam angle
1x1W	32°
Color Temperature	Lumen Output
3000k	28Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
24V DC	Die Casting Powder Coated Aluminum


Wall & Stair

ACU OSR 182040

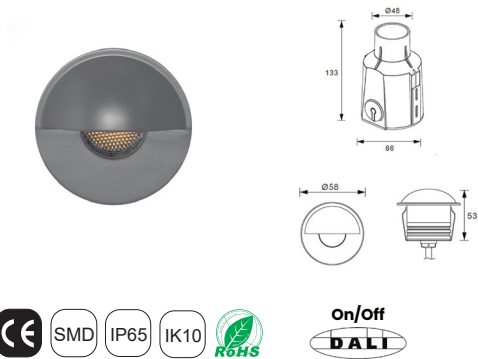

Wattage	Beam angle
1x2W	22°
Color Temperature	Lumen Output
3000k	51Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
24V DC	Die Casting Powder Coated Aluminum

ACU OSR 182041

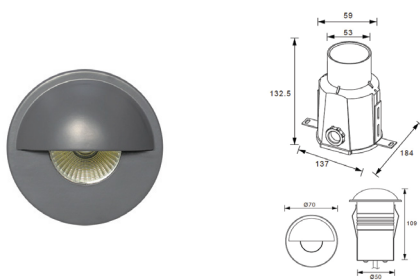

Wattage	Beam angle
1x5W	18° 24° 32°
Color Temperature	Lumen Output
3000k	208Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
24V DC	Die Casting Powder Coated Aluminum




Wall & Stair

ACU OSR 216001



Wattage	Beam angle
30x0.3W	2/A°
Color Temperature	Lumen Output
3000k	400Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die-casting Aluminum


ACU OSR 216002

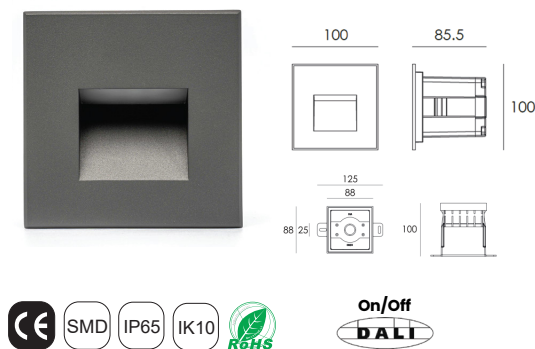

Wattage	Beam angle
10x0.5W	N/A
Color Temperature	Lumen Output
3000k	112Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die-casting Aluminum


Wall & Stair

ACU OSR 216003R

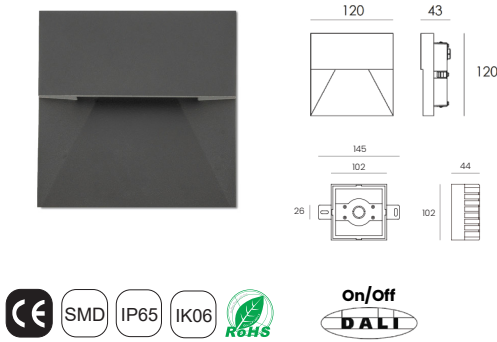

Wattage	Beam angle
9x0.5W	N/A
Color Temperature	Lumen Output
3000k	158Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die-casting Aluminum

ACU OSM 216003S

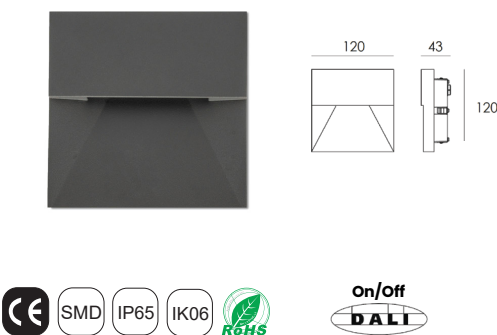


Wattage	Beam angle
9x0.5W	N/A
Color Temperature	Lumen Output
3000k	158Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die-casting Aluminum



Wall & Stair

ACU OSR 216004

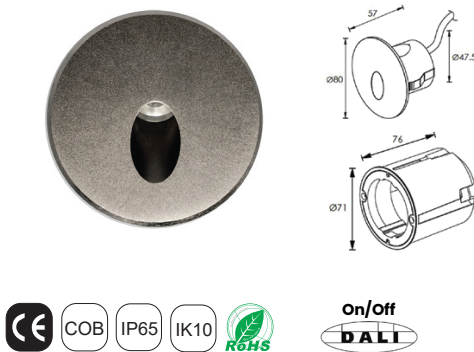

Wattage	Beam angle
1W	80°
Color Temperature	Lumen Output
3000k	46Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Stainless Steel Cover with Matt Cover

ACU OSR 216005



Wattage	Beam angle
12x0.5W	N/A
Color Temperature	Lumen Output
3000k	127Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die-casting Aluminum


Wall & Stair

ACU OW 182042



Wattage	Beam angle
1x12W	10°
Color Temperature	Lumen Output
3000k	≈444Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Black ■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


ACU OW 182043

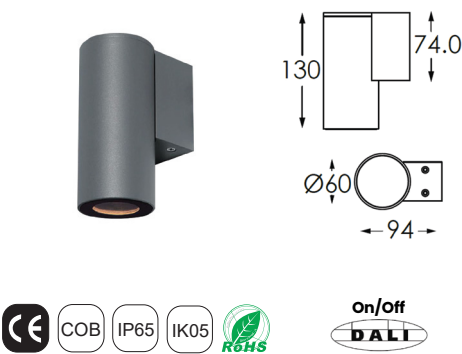

Wattage	Beam angle
1x4.5W	15° 24° 38°
Color Temperature	Lumen Output
3000k	254Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


Wall & Stair

ACU OW 182044

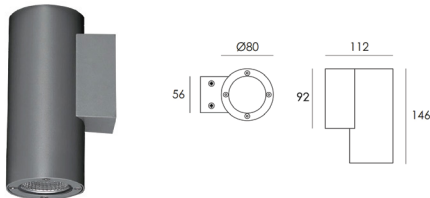

Wattage	Beam angle
1x10W	15° 24° 38° 60°
Color Temperature	Lumen Output
3000k	1170Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum

ACU OW 182045

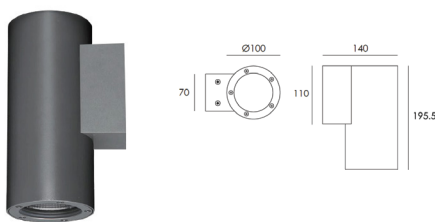


Wattage	Beam angle
1x18W	12° 22° 38° 55°
Color Temperature	Lumen Output
3000k	1847Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum




Wall & Stair

ACU OW 182046

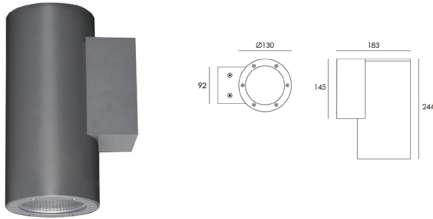

Wattage	Beam angle
1x25W	10° 22° 38°
Color Temperature	Lumen Output
3000k	2967Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum

ACU OW 182047

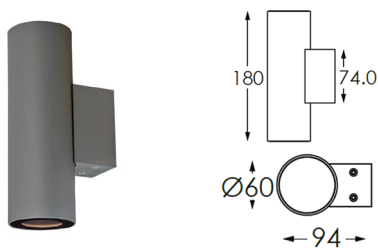


Wattage	Beam angle
2x4.5W	12° 22° 38° 55°
Color Temperature	Lumen Output
3000k	254x2Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey ■ Black
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum




Wall & Stair

ACU OW 182048

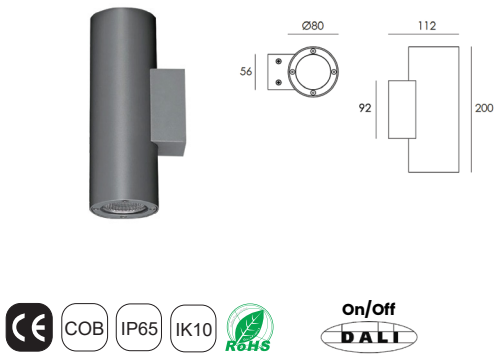

Wattage	Beam angle
2x8W	15° 24° 38° 60°
Color Temperature	Lumen Output
3000k	1972Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


ACU OW 182049

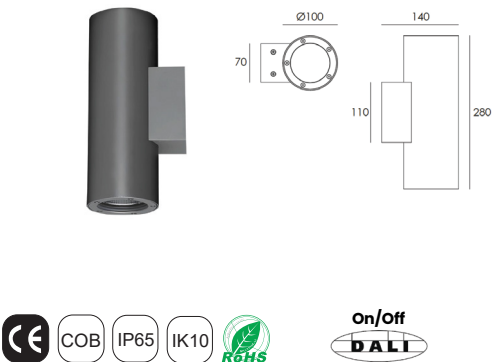

Wattage	Beam angle
2x12W	12° 22° 38° 55°
Color Temperature	Lumen Output
3000k	2158Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


Wall & Stair

ACU OW 182050

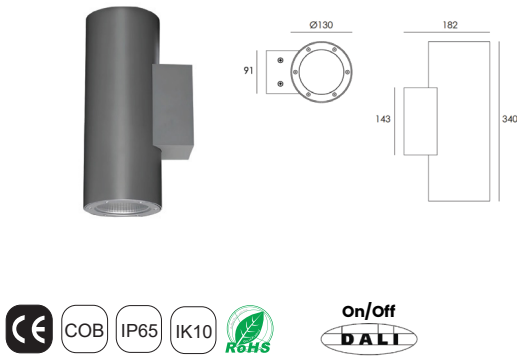

Wattage	Beam angle
2x18W	10° 22° 38°
Color Temperature	Lumen Output
3000k	4072Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum


ACU OW 182051

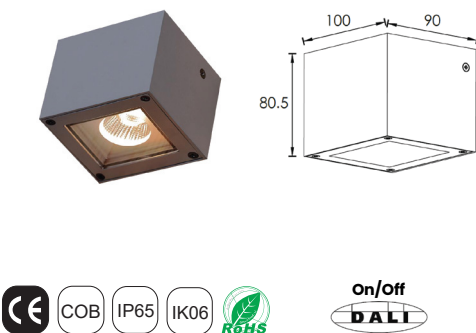

Wattage	Beam angle
1x6W	18° 25° 40°
Color Temperature	Lumen Output
3000k	651Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Grey □ White ■ Black
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum

Wall & Stair

ACU OW 182051N

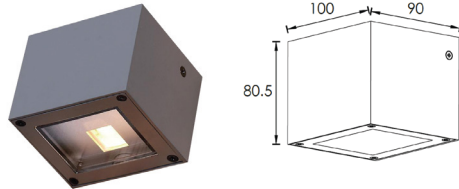

Wattage	Beam angle
---------	------------

1x3W	10°
------	-----

Color Temperature	Lumen Output
-------------------	--------------

3000k	67Lm
-------	------

Installation	Rated life hours
--------------	------------------

Surface Mounted	30000-50000H
-----------------	--------------


CRI	Colors
-----	--------

≥90	■ Grey ■ Black
-----	----------------

Input Voltage	Material
---------------	----------

220V AC	Die Casting Powder Coated Aluminum
---------	------------------------------------

ACU OW 182052

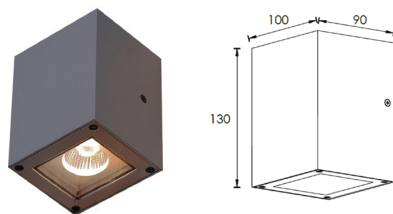

Wattage	Beam angle
---------	------------

2x6W	18° 25° 40°
------	-------------

Color Temperature	Lumen Output
-------------------	--------------

3000k	13021Lm
-------	---------

Installation	Rated life hours
--------------	------------------

Surface Mounted	30000-50000H
-----------------	--------------

CRI	Colors
-----	--------


≥90	■ Grey
-----	--------

Input Voltage	Material
---------------	----------

220V AC	Die Casting Powder Coated Aluminum
---------	------------------------------------

Wall & Stair

ACU OW 182052N

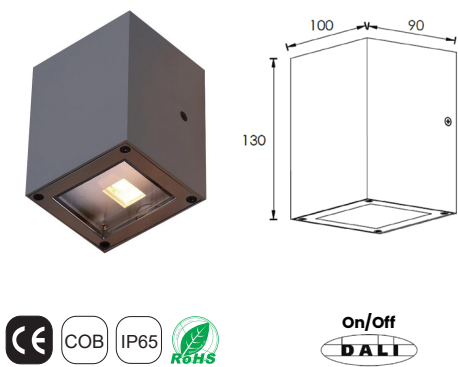

Wattage	Beam angle
2x3W	10°
Color Temperature	Lumen Output
3000k	69Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	☒ Grey ☐ White ☒ Black
Input Voltage	Material
220V AC	Die Casting Powder Coated Aluminum



Outdoor DownLight


Outdoor ultra-thin downlight designed to be handy, simple, weather broof and easy to install.

The anti-glare system provides visual comfort for the user.

Ceiling

Surface Mounted

ACU OSM 208101



Wattage	Beam angle
15W	24° , 36° , 60°

Color Temperature	Lumen Output
2700k	1144 Lm
3000k	1271Lm
4000k	1390Lm

Installation	Rated life hours
Surface Mounted	30000-50000H


CRI	Colors
≥90	■ Black □ White

Input Voltage	Material
220V AC (Via the Attached Built In Driver)	Powder Coated Aluminum

SELEX

Recessed

ACU OD 255001



Wattage	Beam angle
7W	15° ,24° , 36° , 50°

Color Temperature	Lumen Output
3000k	700 Lm

Installation	Rated life hours
Recessed	30000-50000H

CRI	Colors
≥90	■ Black □ White

Input Voltage	Material
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum

SELEX

Recessed

ACU OD 255002



Wattage	Beam angle
10W	15° , 24° , 36° , 50°
Color Temperature	Lumen Output
3000k	1000 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■Black □White
Input Voltage	Material
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum


ACU OD 255003



Wattage	Beam angle
15W	15° ,24° , 36° , 50°
Color Temperature	Lumen Output
3000k	1500 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■Black □White
Input Voltage	Material
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum



ACU OD 255004



Wattage	Beam angle
20W	15° , 24° , 36° , 50°
Color Temperature	Lumen Output
3000k	2000 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■Black □White
Input Voltage	Material
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum

NEON FLEX


Outdoor strip lighting offers a sleek, modern solution for indirect illumination. It is easy to install, energy-efficient, and designed to enhance any exterior space with subtle, continuous lighting.



Neon Flex


Side Bend

ACU ST 202201



Wattage	Beam angle
10.6 W/m	N/A
Color Temperature	Lumen Output
2700K	410 Lm/m
3000k	450 Lm/m
4000k	420 Lm/m
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimention	Cutting Section
W 12mm x H 17mm	50mm / 7 LEDs

ACU ST 202202-RGB




Wattage	Beam angle
13.2 W/m	N/A
Color Temperature	Lumen Output
RGB	N/A
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimention	Cutting Section
W 12mm x H 17mm	83.3mm / 7 LEDs

Neon Flex

Side Bend

ACU ST 202203-RGBW

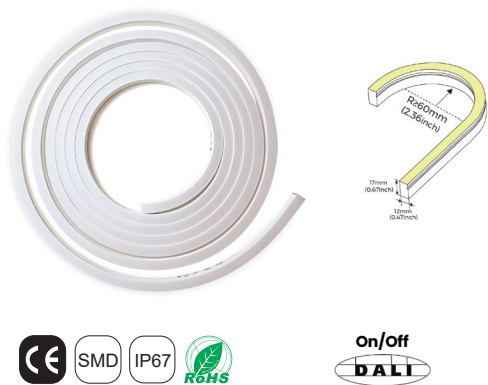

Wattage	Beam angle
16 W/m	N/A
Color Temperature	
RGB-2700k RGB-4000k	
RGB-3500k RGB-5000k	
RGB-3000k	
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimention	Cutting Section
W 12mm x H 17mm	62.5mm / 12 LEDs

ACU ST 202204-T24-4K




Wattage	Beam angle
13.2 W/m	N/A
Color Temperature	Lumen Output
2400K-4000k Tunable	520 Lm/m
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimention	Cutting Section
W 12mm x H 17mm	100mm / 14 LEDs

Neon Flex


Side Bend

ACU ST 202205



Wattage	Beam angle
5.8 W/m	N/A
Color Temperature	Lumen Output
2700k	220 Lm/m
3000k	220 Lm/m
4000k	240 Lm/m
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
48V DC	Neon Flex
Dimention	Cutting Section
W 12mm x H 17mm	100mm / 12 LEDs

ACU ST 202701



Wattage	Beam angle
10.6 W/m	N/A
Color Temperature	Lumen Output
2700K	420 Lm/m
3000K	440 Lm/m
4000K	430 Lm/m
5000K	430 Lm/m
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimention	Cutting Section
W 12mm x H 24mm	50mm / 7 LEDs

Neon Flex

Side Bend

ACU ST 202702-RGB




Wattage	Beam angle
13.2 W/m	N/A
Color Temperature	Lumen Output
RGB	N/A
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimension	Cutting Section
W 12mm x H 24mm	83.3mm / 7 Leds

Neon Flex

Side Bend, Ultra Slim

ACU ST 202401

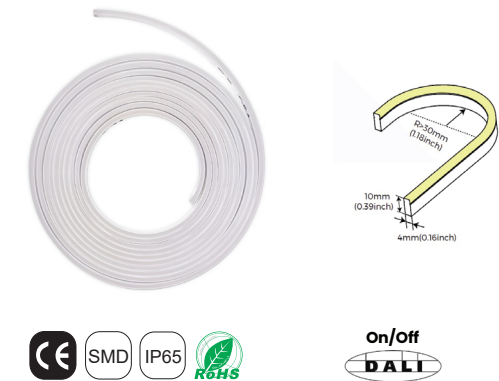

Wattage	Beam angle
7.9 W/m	N/A
Color Temperature	Lumen Output
2300K	240 Lm/m
2700K	240 Lm/m
3000K	270 Lm/m
4000K	270 Lm/m
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimension	Cutting Section
W 4mm x H 10mm	41.66mm / 7 LEDs



Neon Flex

Side Bend, Ultra Slim

ACU ST 202402-T23-4K



Wattage	Beam angle
7.9 W/m	N/A
Color Temperature	Lumen Output
2300K-4000K	220 Lm/m
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimention	Cutting Section
W 4mm x H 10mm	31.25mm / 12 LEDs

Side Bend, Slim

ACU ST 202501




Wattage	Beam angle
10.6 W/m	N/A
Color Temperature	Lumen Output
2300K	250 Lm/m
2700K	280 Lm/m
3000K	280 Lm/m
4000K	280 Lm/m
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimention	Cutting Section
W 6mm x H 12mm	50mm / 6 LEDs

Neon Flex


Top Bend

ACU ST 202301

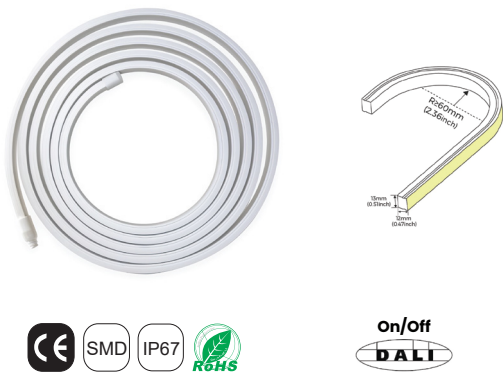

Wattage	Beam angle
10.6 W/m	N/A
Color Temperature	Lumen Output
2700K	710 Lm/m
3000K	740 Lm/m
4000K	690 Lm/m
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimention	Cutting Section
W 13mm x H 12mm	50mm / 7 LEDs

ACU ST 202302-RGB

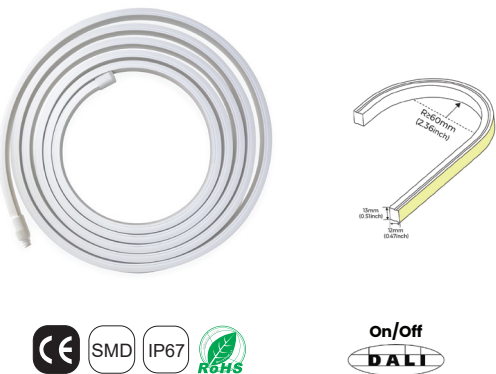


Wattage	Beam angle
13.2 W/m	N/A
Color Temperature	Lumen Output
RGB	N/A
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimention	Cutting Section
W 13mm x H 12mm	83.3mm / 7 LEDs

Neon Flex


Top Bend

ACU ST 202303-RGBW

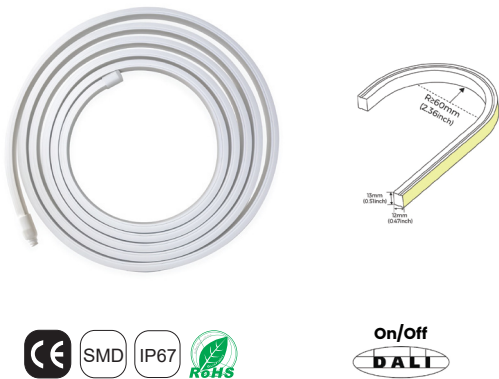

Wattage	Beam angle
16 W/m	N/A
Color Temperature	
RGB-2700K RGB-4000K	
RGB-3500K RGB-5400K	
RGB-3000K	
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimention	Cutting Section
W 13mm x H 12mm	62.5mm / 12 LEDs

ACU ST 202304-T27-5K

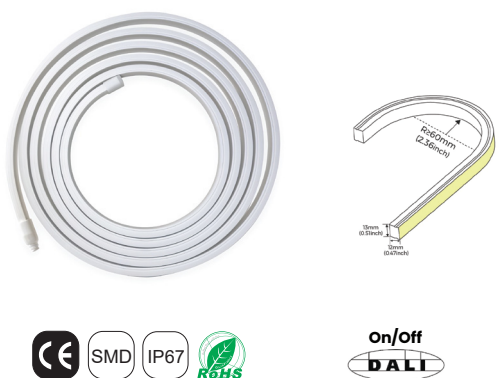


Wattage	Beam angle
13.2 W/m	N/A
Color Temperature	Lumen Output
Tunable 2700K-5000K	N/A
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimention	Cutting Section
W 13mm x H 12mm	55.6mm / 14 LEDs

Neon Flex


Top Bend

ACU ST 202305



Wattage	Beam angle
5.8 W/m	N/A
Color Temperature	Lumen Output
2700K	370 Lm/m
3000K	360 Lm/m
4000K	380 Lm/m
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
48V DC	Neon Flex
Dimention	Cutting Section
W 13mm x H 12mm	100mm / 12 LEDs

ACU ST 202601



Wattage	Beam angle
10.6 W/m	N/A
Color Temperature	Lumen Output
2200K	500 Lm/m
2700K	590 Lm/m
3000K	600 Lm/m
4000K	570 Lm/m
Installation	Rated life hours
Neon Flex Accessories Profile & Clips	36000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
24V DC	Neon Flex
Dimention	Cutting Section
W 15mm x H 15mm	50mm / 7 LEDs



PROJECTOR

Durable outdoor spotlight for gardens, trees and plants.
Features an adjustable head, weatherproof IP65 design.
Easy ground spike and surface mounted installation.



Projector

Landscape Projector

ACU OP 252501S



Wattage	Beam angle
2.6 W	20° 30°
Color Temperature	Lumen Output
3000k	92 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Material
24V DC	Die-Casting aluminium
	Cutting Section
	N/A

ACU OP 211003S




Wattage	Beam angle
2.6 W	20° 30°
Color Temperature	Lumen Output
3000k	92 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Material
24V DC	Die-Casting aluminium
	Cutting Section
	N/A

Projector

Landscape Projector

ACU OP 211003M

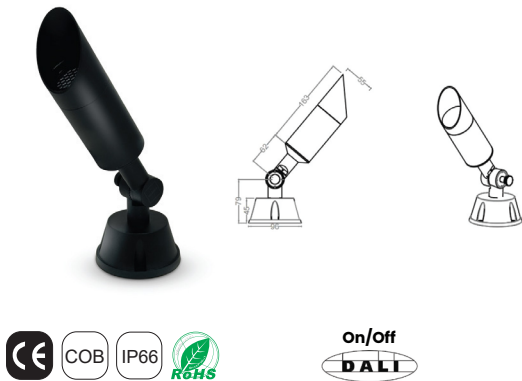

Wattage	Beam angle
6 W	15° 40°
Color Temperature	Lumen Output
3000k	540 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥80	■ Black
Input Voltage	Material
220V AC	Die-Casting aluminium
Cutting Section	
N/A	

ACU OP 211003S




Wattage	Beam angle
6 W	15° 40°
Color Temperature	Lumen Output
3000k	540 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥80	■ Black
Input Voltage	Material
220V AC	Die-Casting aluminium
Cutting Section	
N/A	



Projector

Landscape Projector

ACU OP 211101M

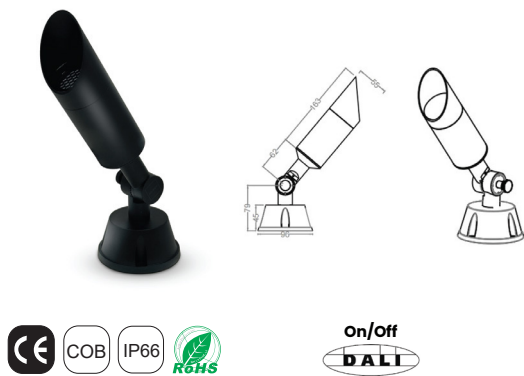

Wattage	Beam angle
12 W	15° 40°
Color Temperature	Lumen Output
3000k	1080 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥80	■ Black
Input Voltage	Material
220V AC	Die-Casting aluminium
Cutting Section	
N/A	

ACU OP 211101S




Wattage	Beam angle
12 W	15° 40°
Color Temperature	Lumen Output
3000k	1080 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥80	■ Black
Input Voltage	Material
220V AC	Die-Casting aluminium
Cutting Section	
N/A	

Projector


Landscape Projector

ACU OP 211102M

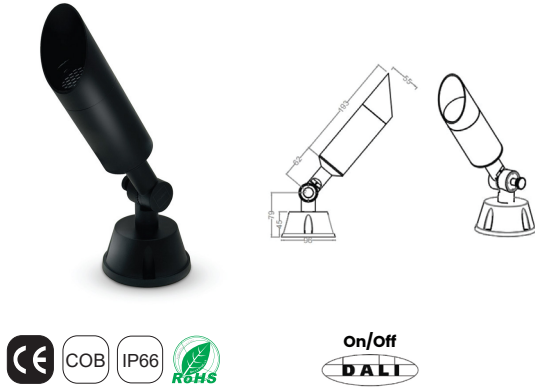

Wattage	Beam angle
16 W	15° 40°
Color Temperature	Lumen Output
3000k	1440 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥80	■ Black
Input Voltage	Material
220V AC	Die-Casting aluminium
Cutting Section	
N/A	

ACU OP 211102S

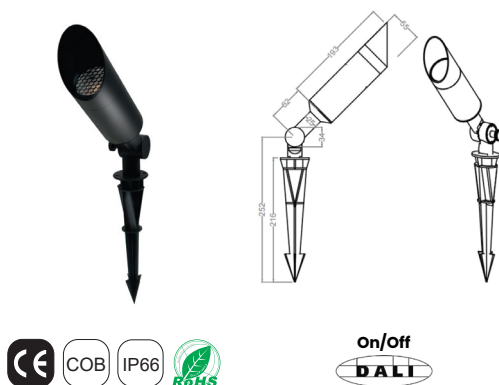

Wattage	Beam angle
16 W	15° 40°
Color Temperature	Lumen Output
3000k	1440 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥80	■ Black
Input Voltage	Material
220V AC	Die-Casting aluminium
Cutting Section	
N/A	



Projector

Tree Ring

ACU OP 211000R



Tree Ring, Used with Tree light projectors

Diameter

600mm

BOLLARD

Modern and functional outdoor bollard light designed to illuminate pathways, gardens, driveways, and open landscapes. Offers glare-free lighting with robust construction, perfect for enhancing safety and ambience in any exterior setting.



Bollard

Landscape Light

ACU OB 182071



Wattage	Beam angle
5 W	Asymmetric
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum + PC
CRI	Colors
≥80	■ Black
Dimention	Input Voltage
L 105.5 x W 104.5 x H 600 mm	220V AC

ACU OB 182072



Wattage	Beam angle
7 W	120°
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum + PC
CRI	Colors
≥80	■ Black
Dimention	Input Voltage
Ø110 mm, L 775 mm	220V AC

Bollard

Landscape Light

ACU OB 182073-1



Wattage	Beam angle
7 W	Asymmetric
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum + PC
CRI	Colors
≥80	■ Black
Dimension	Input Voltage
L 60 x W 120 x H 400 mm	220V AC

ACU OB 182073-2



Wattage	Beam angle
7 W	Asymmetric
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum + PC
CRI	Colors
≥80	■ Black
Dimension	Input Voltage
L 60 x W 120 x H 600 mm	220V AC



Bollard

Landscape Light

ACU OB 182073-3



Wattage	Beam angle
7 W	Asymmetric
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum + PC
CRI	Colors
≥80	■ Black
Dimention	Input Voltage
L 60 x W 120 x H 800 mm	220V AC

ACU OB 182075-1



Wattage	Beam angle
8.4 W	N/A
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum sheel & Glass
CRI	Colors
≥80	■ Black
Dimention	Input Voltage
Φ120 x H 400mm , Base Φ150 mm	220V AC

Bollard

Landscape Light

ACU OB 182075-2



Wattage	Beam angle
16.8 W	N/A
Color Temperature	Rated life hours
3000k	30000-50000H
Installation	Material
Surface Mounted	Aluminum sheel & Glass
CRI	Colors
≥80	■ Black
Dimention	Input Voltage
Φ120 x H 550mm , Base Φ150 mm	220V AC

