


INDOOR LIGHTING

ACUMEN

www.acumenlight.com

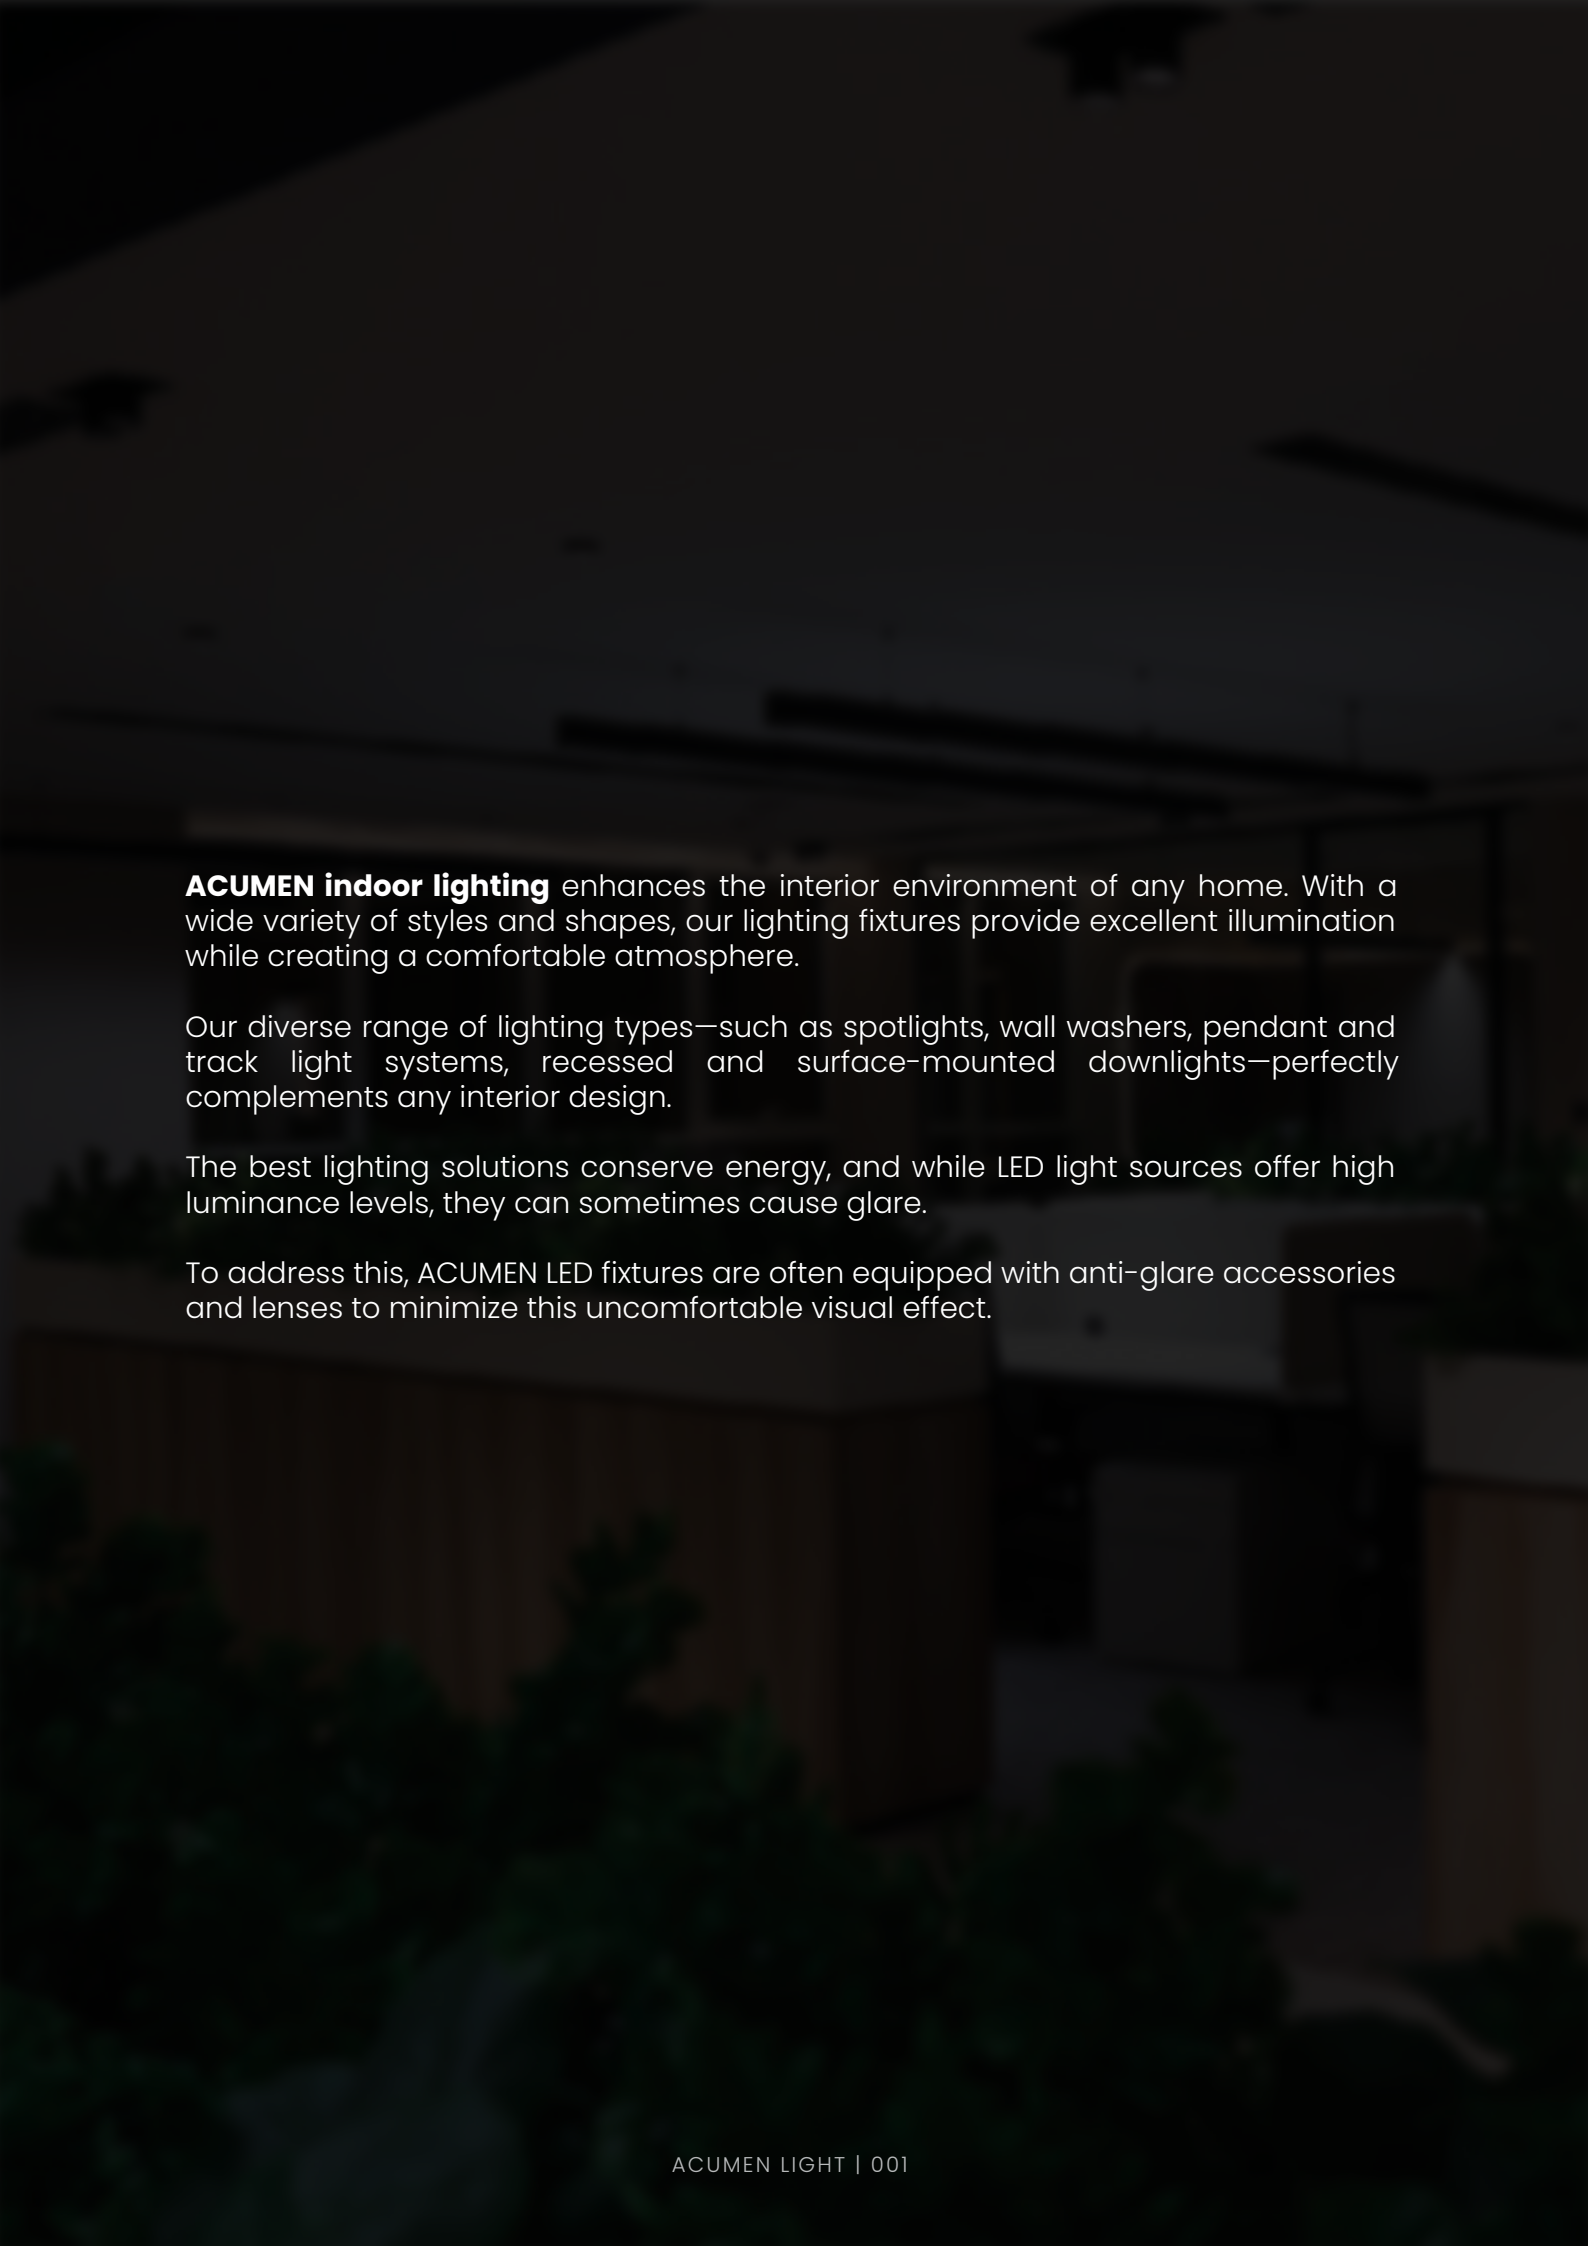

ACUMEN indoor lighting enhances the interior environment of any home. With a wide variety of styles and shapes, our lighting fixtures provide excellent illumination while creating a comfortable atmosphere.

Our diverse range of lighting types—such as spotlights, wall washers, pendant and track light systems, recessed and surface-mounted downlights—perfectly complements any interior design.

The best lighting solutions conserve energy, and while LED light sources offer high luminance levels, they can sometimes cause glare.

To address this, ACUMEN LED fixtures are often equipped with anti-glare accessories and lenses to minimize this uncomfortable visual effect.



MODULAR


ACUMEN Modular LED light fixtures can fit any environment and can serve as an ambient, task, or accent lighting type. A variety of beam angles, frame types, and colors will compliment any interior design. For a more comfortable atmosphere, there are anti-glare accessories and dimming options available. The wattage

- DRIVERS ARE PROVIDED BY **TRIDONIC**

Narrow Beam Angle

ACU 01703-09


RTL



Wattage	Beam angle
9W	10°
Color Temperature	Lumen Output
2700K	675LM
3000K	750LM
4000K	790LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H
Installation	Input Voltage
Recessed	220V AC (Via the Attached Remote Driver)
Accessory	CRI
 Honey Comb	≥ 90

ACU 01703-15

RTL




Wattage	Beam angle
15W	10°
Color Temperature	Lumen Output
2700K	1040LM
3000K	1100LM
4000K	1160LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H
Installation	Input Voltage
Recessed	220V AC (Via the Attached Remote Driver)
Accessory	CRI
 Honey Comb	≥ 90

Wide Beam Angle

ACU 01704-09


RTL



Wattage	Beam angle
9W	15° 25° 40° 60°
Color Temperature	Lumen Output
2700K	675LM
3000K	750LM
4000K	790LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H
Installation	Input Voltage
Recessed	220V AC (Via the Attached Remote Driver)
Accessory	CRI
 Honey Comb	≥ 90

ACU 01704-15

RTL




Wattage	Beam angle
15W	15° 25° 40° 60°
Color Temperature	Lumen Output
2700K	1040LM
3000K	1100LM
4000K	1160LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H
Installation	Input Voltage
Recessed	220V AC (Via the Attached Remote Driver)
Accessory	CRI
 Honey Comb	≥ 90



THE FRAMES


Stella Adjustable, Libra, Hydra Collection, Lynex, and Cursa.

All these product frames are available in multiple color options to suit a variety of styles and design preferences!




ACU 10002 ADJ

Stella Adj




ACU 10004

LIBRA




Modular
FRAMES



ACU 10005R
HYDRA





ACU 10005RW
HYDRA



ACU 10005S
HYDRA-SQUARE




10005SW
HYDRA-SQUARE



Modular
FRAMES


ACU 10006R

LYNX




ACU 10006RW

LYNX



ACU 10007DS

CURSA





LEO-IP

A recessed spotlight made of powder-coated aluminium housing with excellent heat sink capability to minimize luminous degradation. This light is recommended to be used in wet applications such as washrooms.

- DRIVERS ARE PROVIDED BY **TRIDONIC**

LEO IP


Round Frame

ACU S 17009



Wattage	Beam angle
8W	20° 24° 36°
Color Temperature	Lumen Output
3000k	675 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Remote Driver	Aluminum
Cutting Section	
Cut out Ø53mm	

ACU S 17010

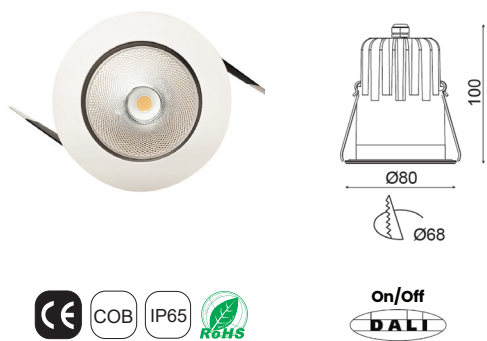


Wattage	Beam angle
15W	15° 24° 38° 60°
Color Temperature	Lumen Output
3000k	1125 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Remote Driver	Aluminum
Cutting Section	
Cut out Ø68mm	



LEO IP

Adjustable

ACU S 17010 ADJ




Wattage	Beam angle
15W	15° 24° 38° 60°
Color Temperature	Lumen Output
3000k	1125 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Remote Driver	Aluminum
Cutting Section	
Cut out 85mm	

LEO IP

Mini Round Frame

ACU S 17010MR



Wattage	Beam angle
1.5W	10°
Color Temperature	Lumen Output
3000k	90 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Remote Driver	Aluminum
Cutting Section	
Cut out Ø32mm	

DOWN LIGHT

The range of variety of the **Down Light** categories makes it irresistible to use. As users can find different wattages, color temperature, and beam angles, as well as different types, from the recessed surface, mounted, to suspended downlights.

Down Light families will allow the users to use them in their multiple applications.

NERO COLLECTION




Nero Black Hole

This lighting solution is engineered to precisely focus light and distribute it evenly, ensuring both functional and aesthetic illumination. Featuring a small aperture design combined with cross-lighting technology, it minimizes direct glare while enhancing ambient brightness. The fixture delivers low glare performance and boasts high luminous efficiency, reaching up to 70%, making it an ideal choice for energy-efficient and visually comfortable lighting applications.

Nero FLAT

ACU FS 251101




Wattage	Beam angle
5W	15° 36°
Color Temperature	Lumen Output
3000k	300Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
Cutting Section	
Cut Out: Ø35mm	

Flat Shape Frame

Nero Collection

ACU FS 251102



Wattage

10W

Beam angle

15° 36°

Color Temperature

3000K

Lumen Output

600Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC
(Via the Attached Remote Driver)


Materials

Powder Coated
Aluminum

Cutting Section

Cut Out: Ø65mm

ACU FS 251103



Wattage

15W

Beam angle

15° 36°

Color Temperature

3000k

Lumen Output

900Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC
(Via the Attached Remote Driver)


Materials

Powder Coated
Aluminum

Cutting Section

Cut Out: Ø75mm



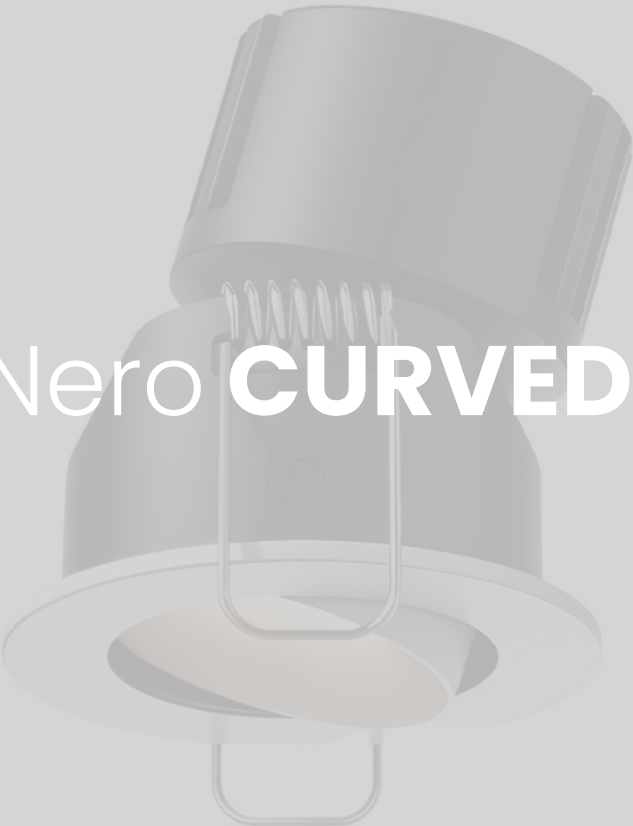


Nero **CURVED**

Adjustable Curved Shape Frame

Nero Collection

ACU CS 251000

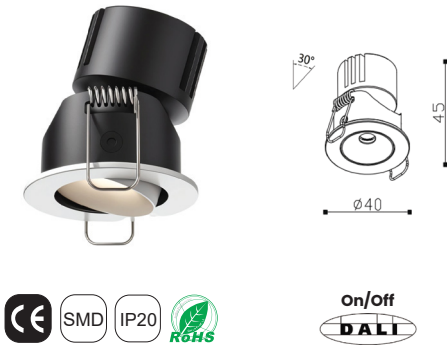

Wattage

5W

Beam angle

20° 40°

Color Temperature

3000K

Lumen Output

172Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥95

Colors

■ Black □ White

Input Voltage

220V AC
(Via the Attached Remote Driver)

Materials

Powder Coated
Aluminum

Cutting Section

Cut Out: Ø35mm

ACU CS 251001



Wattage

5W

Beam angle

15° 36°

Color Temperature

3000k

Lumen Output

300Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC
(Via the Attached Remote Driver)

Materials

Powder Coated
Aluminum

Cutting Section

Cut Out: Ø35mm

Adjustable Curved Shape Frame

Nero Collection

ACU CS 251002



Wattage	Beam angle
10W	15° 36°
Color Temperature	Lumen Output
3000K	600Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
Cutting Section	
Cut Out: Ø65mm	

ACU CS 251003



Wattage	Beam angle
15W	15° 36°
Color Temperature	Lumen Output
3000k	900Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
Cutting Section	
Cut Out: Ø75mm	



Nero TRIMLESS

ACU TS 251201



Wattage	Beam angle
---------	------------

5W	15° 36°
----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000K	350Lm
-------	-------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	☒ Black ☐ White
-----	--

Input Voltage	Materials
---------------	-----------

220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
---	------------------------


Cutting Section

Cut Out: Ø35mm

Nero Trimless Frame

Nero Collection

ACU TS 251202



Wattage	Beam angle
10W	15° 36°
Color Temperature	Lumen Output
3000k	700Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
Cutting Section	
Cut Out: Ø45mm	

ACU TS 251203




Wattage	Beam angle
15W	15° 36°
Color Temperature	Lumen Output
3000K	1050Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
Cutting Section	
Cut Out: Ø45mm	



Nero WALL WASHER



ACU WW 251301




Wattage	Beam angle
3.7W	20° 38°
Color Temperature	Lumen Output
3000K	120Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥95	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
Cutting Section	
Cut Out: Ø35 mm	

VEGA C

LED ultra-thin downlight design is handy, simple, and easy to install. The anti-glare system provides visual comfort for the user. This light comes with a frosted acrylic diffuser for high light transmittance.

- DRIVERS ARE PROVIDED BY **TRIDONIC**

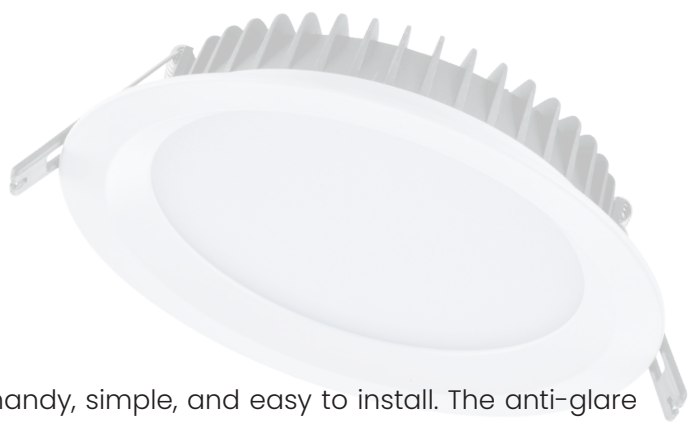



Recessed Down Light

ACU D 20060



Wattage	Beam angle
5W	100°
Color Temperature	Lumen Output
3000k	400 LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 – 50,000H
Installation	CRI
Recessed	≥ 90
Input Voltage	
220V AC (Via the Attached Remote Driver)	


ACU D 20061



Wattage	Beam angle
7W	100°
Color Temperature	Lumen Output
3000k	560 LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 – 50,000H
Installation	CRI
Recessed	≥ 90
Input Voltage	
220V AC (Via the Attached Remote Driver)	


Recessed Down Light

ACU D 20062



Wattage	Beam angle
9W	100°
Color Temperature	Lumen Output
3000k	720 LM
4000k	720 LM
6000k	720 LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H
Installation	CRI
Recessed	≥ 90
Input Voltage	
220V AC (Via the Attached Remote Driver)	


ACU D 20063



Wattage	Beam angle
12W	100°
Color Temperature	Lumen Output
3000k	960 LM
4000k	960 LM
6000k	960 LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H
Installation	CRI
Recessed	≥ 90
Input Voltage	
220V AC (Via the Attached Remote Driver)	

Recessed Down Light

ACU D 20064



Wattage

15W

Beam angle

100°

Color Temperature

3000k

4000k

6000k

Lumen Output

1200 LM

1200 LM

1200 LM

Operation Temperature

-20°C~+40°C

Rated life hours

30,000 - 50,000H

Installation

Recessed


CRI

≥ 90

Input Voltage

220V AC
(Via the Attached Remote Driver)

ACU D 20065



Wattage

20W

Beam angle

100°

Color Temperature

3000k

4000k

6000k

Lumen Output

1600 LM

1600 LM

1600 LM

Operation Temperature

-20°C~+40°C

Rated life hours

30,000 - 50,000H

Installation

Recessed

CRI

≥ 90

Input Voltage

220V AC
(Via the Attached Remote Driver)

Recessed Down Light

ACU D 20066



Wattage	Beam angle
25W	100°
Color Temperature	Lumen Output
3000k	2000 LM
4000k	2000 LM
6000k	2000 LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H
Installation	CRI
Recessed	≥ 90
Input Voltage	
220V AC (Via the Attached Remote Driver)	

ACU D 20067



Wattage	Beam angle
30W	100°
Color Temperature	Lumen Output
3000k	2400LM
4000k	2400 LM
6000k	2400 LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H
Installation	CRI
Recessed	≥ 90
Input Voltage	
220V AC (Via the Attached Remote Driver)	

MEGA

LED ultra-thin downlight design is handy, simple, and easy to install. The anti-glare system provides visual comfort for the user. This light comes with a frosted acrylic diffuser for high light transmittance.

- DRIVERS ARE PROVIDED BY **TRIDONIC**





Recessed Down Light


ACU DR 240001



Wattage	Beam angle
15W	85°
Color Temperature	Lumen Output
3000K	1423 LM
4000K	1503 LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H
Installation	CRI
Recessed	≥ 90
Colors	Input Voltage
☒ Black ☐ White	220V AC (Via the Attached Remote Driver)

Recessed Down Light

ACU DR 240002

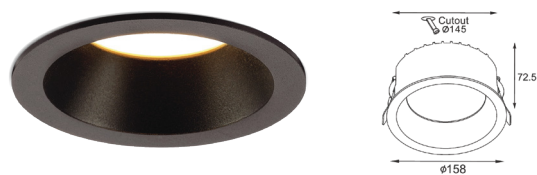

Wattage	Beam angle
33W	85°
Color Temperature	Lumen Output
3000K	3532 LM
4000K	3661 LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H
Installation	CRI
Recessed	≥ 90
Colors	Input Voltage
☒ Black ☐ White	220V AC (Via the Attached Remote Driver)

Surface Mounted Down Light

ACU DSM 240003



Wattage	Beam angle
8W	80°

Color Temperature	Lumen Output
3000K	635 LM
4000K	655 LM

Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H

Installation	CRI
Surface Mounted	≥ 90

Colors	Input Voltage
☒ Black / Black ☐ White / Silver	220V AC (Via the Attached Remote Driver)
☐ White / Gold ☐ White-White	

Surface Mounted Down Light

ACU DSM 240004



Wattage	Beam angle
15W	80°

Color Temperature	Lumen Output
3000K	1139 LM
4000K	1186 LM

Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H

Installation	CRI
Surface Mounted	≥ 90

Colors	Input Voltage
☒ Black / Black ☐ White / Silver	220V AC (Via the Attached Remote Driver)
☐ White / Gold ☐ White-White	



Surface Mounted Down Light

ACU DSM 240005



Wattage	Beam angle
30W	110°
Color Temperature	Lumen Output
3000K	3160 LM
4000K	3391 LM
Operation Temperature	Rated life hours
-20°C~+40°C	30,000 - 50,000H
Installation	CRI
Surface Mounted	≥ 90
Colors	Input Voltage
☒ Black / Black ☐ White / Silver	220V AC (Via the Attached Remote Driver)
☐ White / Gold ☐ White-White	



PAVO



This family is specialized in residential and hospitality applications because of its high efficiency, variety of beam angles, and wattages. The main character of this family is that it is adjustable, which supports the users in illuminating different surfaces from one source.

- DRIVERS ARE PROVIDED BY **TRIDONIC**

Pavo


Pavo Adjustable

ACU 200901



Wattage	Beam angle
3x2 W	12° 34° 48°
Color Temperature	Lumen Output
3000k	450 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
220V AC with the Attached Remote Driver	Powder Coated Aluminum
Dimention	Cutting Section
L 106 x W 60 x H 50.5 mm	CutOut L97 x W49mm

ACU 200902



Wattage	Beam angle
6x2 W	12° 24° 34° 48°
Color Temperature	Lumen Output
3000k	900 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	☒ Black ☐
Input Voltage	Material
220V AC with the Attached Remote Driver	Powder Coated Aluminum
Dimention	Cutting Section
L 186.5 x W 60 x H 50.5mm	Cutout L180x W50mm

Pavo


Pavo Wall Washer

ACU 200903



Wattage	Beam angle
5x2 W	100°
Color Temperature	Lumen Output
3000k	750 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Remote Driver	Powder Coated Aluminum
Dimension	Cutting Section
L 147 x W 45 x H 39 mm	CutOut L132 x W36mm

ACU 200904

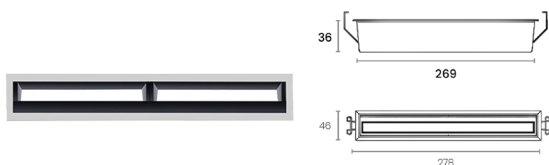


Wattage	Beam angle
10x2 W	100°
Color Temperature	Lumen Output
3000k	1500 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Remote Driver	Powder Coated Aluminum
Dimension	Cutting Section
L 278 x W 46 x H 36 mm	CutOut L269 x W36mm



Pavo

Pavo Wall Washer

ACU 200905

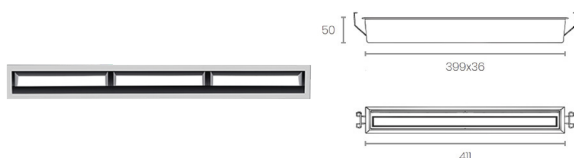


Wattage	Beam angle
15x2 W	100°
Color Temperature	Lumen Output
3000k	2250 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
220V AC with the Attached Remote Driver	Powder Coated Aluminum
Dimension	Cutting Section
L 411 x W 36 x H 50 mm	CutOut L399x W36 mm

Pavo

Pavo DownLight

ACU S 18104




Wattage	Beam angle
2 W	12° 30°
Color Temperature	Lumen Output
3000k	185 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	☐ White
Input Voltage	Material
220V AC with the Attached Remote Driver	Powder Coated Aluminum
Dimension	Cutting Section
L 45 x W 45 x H 49 mm	L34 x W34 mm

Pavo

Pavo DownLight

ACU S 18105

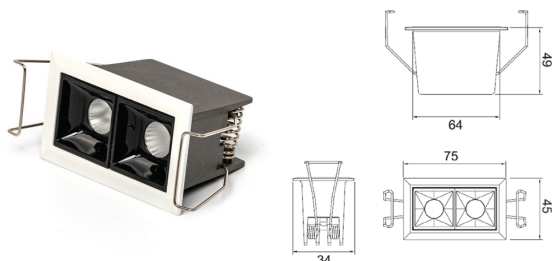

Wattage	Beam angle
---------	------------

2x2 W	12° 30°
-------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	370 Lm
-------	--------

Installation	Rated life hours
--------------	------------------

Recessed	30000-50000H
----------	--------------

CRI	Colors
-----	--------

≥90	■ Black □ White
-----	-----------------

Input Voltage	Material
---------------	----------

220V AC with the Attached Remote Driver	Powder Coated Aluminum
---	------------------------


Dimention	Cutting Section
-----------	-----------------

L 75 x W 45 x H 49 mm	CutOut L68 x W37mm
-----------------------	--------------------

Pavo

Pavo DownLight

ACU S 18106

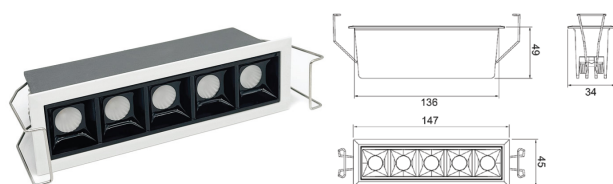

Wattage	Beam angle
---------	------------

5x2 W	12° 30°
-------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	925 Lm
-------	--------

Installation	Rated life hours
--------------	------------------

Recessed	30000-50000H
----------	--------------

CRI	Colors
-----	--------

≥90	■ Black □ White
-----	-----------------

Input Voltage	Material
---------------	----------

220V AC with the Attached Remote Driver	Powder Coated Aluminum
---	------------------------

Dimention	Cutting Section
-----------	-----------------


L 147x W 45x H 49 mm	CutOut L140x W37mm
----------------------	--------------------



Pavo

Pavo DownLight

ACU S 18107

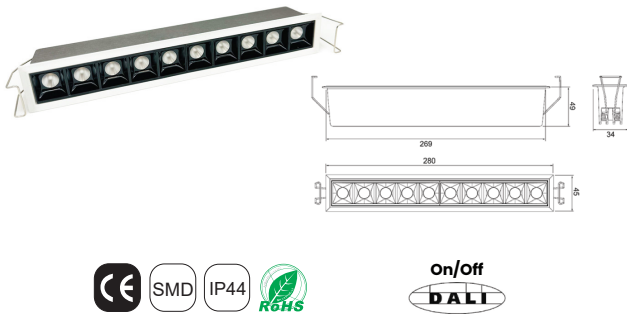


Wattage	Beam angle
10x2 W	12° 30°
Color Temperature	Lumen Output
3000k	1850 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Remote Driver	Powder Coated Aluminum
Dimention	Cutting Section
L 280 x W 45 x H 49 mm	CutOut L273 x W37mm

Pavo

Pavo DownLight

ACU S 18108

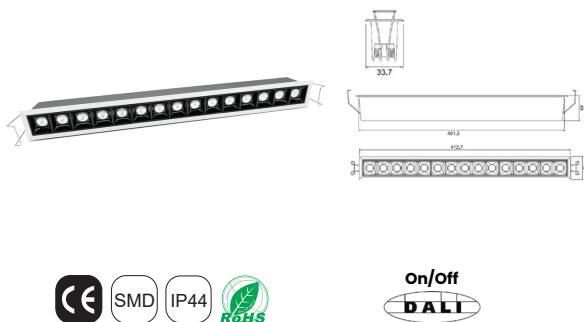

Wattage	Beam angle
15x2 W	12° 30°
Color Temperature	Lumen Output
3000k	2775 Lm
Installation	Rated life hours
Recessed	30000-50000H
CRI	Colors
≥90	□ White
Input Voltage	Material
220V AC with the Attached Remote Driver	Powder Coated Aluminum
Dimention	Cutting Section
L 412.7 x W 45 x H 49 mm	L401.3 x W33.7 mm

MENSA PLUS


Adjustable spotlight is designed for sophisticated accent lighting—perfectly highlighting art, textures, and architectural beauty. A seamless blend of form and function for discerning interiors.



RECESSED ADJUSTABLE SPOT LIGHT

Mensa Plus

ACU RL 245010



Wattage

7W

Beam angle

15° 24° 38°

Color Temperature

3000k

Lumen Output

560Lm

4000k

560Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC
(Via the Attached Remote Driver)


Materials

Powder Coated
Aluminum

RECESSED SPOT LIGHT

Mensa Plus

ACU RL 245011



Wattage

15W

Beam angle

15° 24° 38°

Color Temperature

3000k

Lumen Output

1200Lm

4000k

1200Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC
(Via the Attached Remote Driver)

Materials

Powder Coated
Aluminum

ACU RL 245012



Wattage	Beam angle
24W	15° 24° 38°
Color Temperature	Lumen Output
3000k	2040Lm
4000k	2040Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum



SURFACE MOUNTED ADJUSTABLE SPOT LIGHT

Mensa Plus

ACU SML 245510



Wattage	Beam angle
7W	15° 24° 38°
Color Temperature	Lumen Output
3000k	560Lm
4000k	560Lm
Installation	Rated Life Hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum

SURFACE MOUNTED SPOT LIGHT

Mensa Plus

ACU SML 245511



Wattage	Beam angle
15W	15° 24° 38°
Color Temperature	Lumen Output
3000k	1200Lm
4000k	1200Lm
Installation	Rated Life Hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum

ACU SML 245512



Wattage	Beam angle
24W	15° 24° 38°
Color Temperature	Lumen Output
3000k	2040Lm
4000k	2040Lm
Installation	Rated Life Hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Built in Driver)	Aluminum




הנה
הא
הא

TRACK MOUNTED ADJUSTABLE SPOT LIGHT

Mensa Plus

ACU TL 244010



Wattage

7W

Beam angle

15° 24° 38°

Color Temperature

3000k

4000k

Lumen Output

560Lm

560Lm

Installation

Track Mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC
(Via the Attached Built in Driver)


Materials

Powder Coated
Aluminum

TRACK MOUNTED SPOT LIGHT

Mensa Plus

ACU TL 244011



Wattage

15W

Beam angle

15° 24° 38°

Color Temperature

3000k

4000k

Lumen Output

1200Lm

1200Lm

Installation

Track Mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC
(Via the Attached Built in Driver)


Materials

Powder Coated
Aluminum


TRACK MOUNTED ADJUSTABLE SPOT LIGHT

Mensa Plus

ACU TL 244012



Wattage	Beam angle
24W	15° 24° 38°
Color Temperature	Lumen Output
3000k	2040Lm
4000k	2040Lm
Installation	Rated Life Hours
Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum

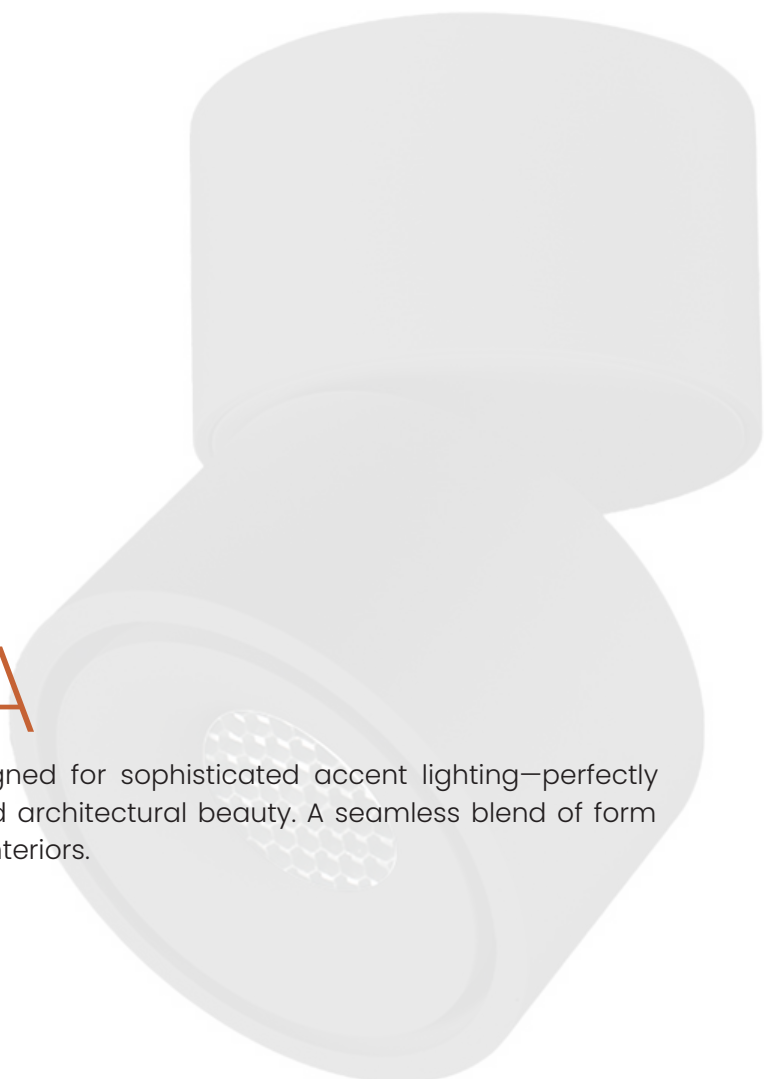

BIANCA


Adjustable spotlight is designed for sophisticated accent lighting—perfectly highlighting art, textures, and architectural beauty. A seamless blend of form and function for discerning interiors.



Bianca

Surface mounted

ACU 200101



Wattage

13W

Beam angle

12° 25° 38°

Color Temperature

2700k

3000k

4000k

Lumen Output

1000 Lm

1079 Lm

1248 Lm

Installation

Surface mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC Via the
Attached Built in Driver


Materials

Powder Coated
Aluminium

Bianca

Recessed

ACU 200102



Wattage

13W

Beam angle

12° 25° 38°

Color Temperature

3000k

4000k

Lumen Output

1079 Lm

1248 Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC Via the Attached
Remote Driver

Materials

Powder Coated
Aluminium

Cutting Section

Cut Out: Ø72 mm

PULSAR

Mini Spot Light

Mini spotlight provides discreet yet powerful accent lighting—ideal for enhancing textures, artworks, and architectural features with subtle sophistication.






Pulsar

Single Adjustable Spot Light

ACU 28101



Wattage	Beam angle
---------	------------

2W	15° 24°
----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	96 Lm
-------	-------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 – 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	■ Black □ White
-----	-----------------

Input Voltage	Materials
---------------	-----------

220V AC Via the Attached Remote Driver	Die Casting Aluminium
--	-----------------------


Cutting Section

Cut out: 25x25mm

Pulsar

Triple Adjustable Spot light

ACU 28102



Wattage	Beam angle
---------	------------

3x2W	15° 24°
------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	384 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Surface Mounted	30,000 – 50,000H
-----------------	------------------

CRI	Colors
-----	--------

≥90	■ Black □ White
-----	-----------------

Input Voltage	Materials
---------------	-----------

220V AC Via the Attached Remote Driver	Die Casting Aluminium
--	-----------------------

Cutting Section

Cut out: 73x25mm

PEEK


COLLECTION

PS. Drivers are included with the lights for all operational functions.



Adjustable Spot Light


ACU 230001



Wattage	Beam angle
3W	15° 24°
Color Temperature	Lumen Output
3000k	148 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC Via the Attached Remote Driver	Die Cast Aluminium
Cutting Section	
Cut Out: Ø42mm	

Zoomable Spot Light

ACU 230002




Wattage	Beam angle
3W	15° →24°
Color Temperature	Lumen Output
3000k	65 Lm - 78Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC Via the Attached Remote Driver	Die Cast Aluminium
Cutting Section	
Cut Out: Ø35mm	



Adjustable Spot Light

ACU 230003



Wattage

3W

Beam angle

15° 24°

Color Temperature

3000k

Lumen Output

108 Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC Via the Attached Remote Driver

Materials


Die Cast Aluminium

Cutting Section

Cut Out: Ø35mm

Adjustable Spot Light

ACU 230004



Wattage

3W

Beam angle

8°

Color Temperature

3000k

Lumen Output

128 Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC Via the Attached Remote Driver

Materials


Die Cast Aluminium

Cutting Section

Cut Out: Ø60mm

Adjustable Spot Light

ACU 230005



Wattage	Beam angle
5W	5°
Color Temperature	Lumen Output
3000k	143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC Via the Attached Remote Driver	Die Cast Aluminium
Cutting Section	
Cut Out: Ø75mm	


RAY COLLECTION

PS. Drivers are included with the lights for all operational functions.



Adjustable with Round Frame

ACU 232001



Wattage

7W

Beam angle

15° 35°

Color Temperature

2700k

3000k

Lumen Output

378 Lm

378 Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black, black
□ Black, white

Input Voltage

220V AC Via the Attached Remote Driver

Materials



Die Cast Aluminium

Cutting Section

Cut out: Ø75mm

Adjustable with Round Frame

ACU 232002



Wattage

12W

Beam angle

15° 35°

Color Temperature

3000k

4000k

Lumen Output

800Lm

800Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black, black
□ Black, white

Input Voltage

220V AC Via the Attached Remote Driver

Materials


Die Cast Aluminium

Cutting Section

Cut out: Ø92mm

Adjustable with Square Frame


ACU 232003



Wattage	Beam angle
1x12W	15° 35°
Color Temperature	Lumen Output
3000k	800 Lm
4000k	800 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ □ Black, white
Input Voltage	Materials
220V AC Via the Attached Remote Driver	Die Cast Aluminium
Cutting Section	
Cut out: 100×100mm	

Adjustable with Square Frame


ACU 232004



Wattage	Beam angle
2x12W	15° 35°
Color Temperature	Lumen Output
3000k	1540Lm
4000k	1540Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black, black □ Black, white
Input Voltage	Materials
220V AC Via the Attached Remote Driver	Die Cast Aluminium
Cutting Section	
Cut out: 190×100mm	

Adjustable with Round Frame

ACU 232005



Wattage

25W

Beam angle

15° 45°

Color Temperature

3000k

4000k

Lumen Output

1910 Lm

1910 Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

- Black, black
- Black, white

Input Voltage

220V AC Via the Attached Remote Driver

Materials

Die Cast Aluminium

Cutting Section

Cut out: Ø140mm




ELARA COLLECTION

PS. Drivers are included with the lights for all operational functions.



Adjustable Spot Light


ACU 200701



Wattage	Beam angle
8W	24° 36°
Color Temperature	Lumen Output
3000k	664 Lm
4000k	768 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ □ Black, White
Input Voltage	Materials
220V AC Via the Attached Remote Driver	Powder Coated Aluminum


SPARK COLLECTION

PS. Drivers are included with the lights for all operational functions.

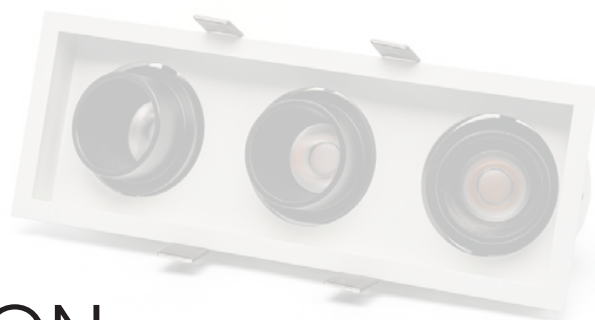

Adjustable with Round Frame

ACU 231001



Wattage

1x7W

Beam angle

20° 30°

Color Temperature

3000k

4000k

Lumen Output

358 Lm

358 Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ □ Black, white

Input Voltage

220V AC Via the Attached Remote Driver

Materials


Die Cast Aluminium

Cutting Section

Cut out: Ø55mm

Adjustable with Trimless Frame

ACU 231002



Wattage

1x7W

Beam angle

20° 30°

Color Temperature

3000k

4000k

Lumen Output

358 Lm

358 Lm

Installation

Trim-less Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ □ Black, white

Input Voltage

220V AC Via the Attached Remote Driver

Materials


Die Cast Aluminium

Cutting Section

Cut out: Ø65mm




Adjustable with Square Frame

ACUMEN LIGHT | 074

Adjustable with Rectangular Frame

ACU 231005



115x60



Wattage

2x7W

Beam angle

20° 30°

Color Temperature

3000k

4000k

Lumen Output

803 Lm

803 Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black, black
□ Black, white

Input Voltage

220V AC Via the Attached
Remote Driver

Materials



Die Cast Aluminium

Cutting Section

Cut out: 115x60mm

Adjustable with Round Frame

ACU 231006



Ø75



Wattage

1x10W

Beam angle

20° 35°

Color Temperature

3000k

4000k

Lumen Output

612 Lm

612 Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ □ Black, white

Input Voltage

220V AC Via the Attached
Remote Driver

Materials


Die Cast Aluminium

Cutting Section

Cut out: Ø75mm

Adjustable with Stadium Frame

ACU 231007



Wattage

2x10W

Beam angle

20° 35°

Color Temperature

3000k

4000k

Lumen Output

1143 Lm

1143 Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ □ Black, white

Input Voltage

220V AC Via the Attached Remote Driver

Materials


Die Cast Aluminium

Cutting Section

Cut out: Ø90×180mm

Adjustable with Square Frame

ACU 231008



Wattage

1x10W

Beam angle

20° 35°

Color Temperature

3000k

4000k

Lumen Output

612 Lm

612 Lm

Installation

Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black, black
□ Black, white

Input Voltage

220V AC Via the Attached Remote Driver

Materials


Die Cast Aluminium

Cutting Section

Cut out: 75×75mm

Adjustable with Rectangular Frame

ACU 231009



Wattage	Beam angle
---------	------------

2x10W	20° 35°
-------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	1143 Lm
4000k	1143 Lm

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	☒ Black, black ☐ Black, white
-----	---

Input Voltage	Materials
---------------	-----------


220V AC Via the Attached Remote Driver	Die Cast Aluminium
--	--------------------

Cutting Section

Cut out: 150×75mm

Adjustable with Square Frame

ACU 231010



Wattage	Beam angle
---------	------------

3x10W	20° 35°
-------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	1747 Lm
4000k	1747 Lm

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	☒ Black ☐ white
-----	--

Input Voltage	Materials
---------------	-----------

220V AC Via the Attached Remote Driver	Die Cast Aluminium
--	--------------------

Cutting Section


Cut out: 225×75mm

STEP COLLECTION

PS. Drivers are included with the lights for all operational functions.




ACU 237001



Wattage	Beam angle
1W	--
Color Temperature	Lumen Output
3000k	Decorative Lumen Effect
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥80	■ Black □ White
Input Voltage	Materials
220V AC Via the Attached Built in Driver	Iron+PC
Cutting Section	Built in Sensor
Cut out: 86mm	

ACU 237002




Wattage	Beam angle
1W	--
Color Temperature	Lumen Output
3000k	Decorative Lumen Effect
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥80	■ Black □ White
Input Voltage	Materials
220V AC Via the Attached Built in Driver	Iron+PC
Cutting Section	Built in Sensor
Cut out: 86mm	



AURIGA

IP20 LED Strip Light

Indoor strip lighting offers a sleek, modern solution for indirect illumination. It is easy to install, energy-efficient, and designed to enhance any interior space with subtle, continuous lighting.

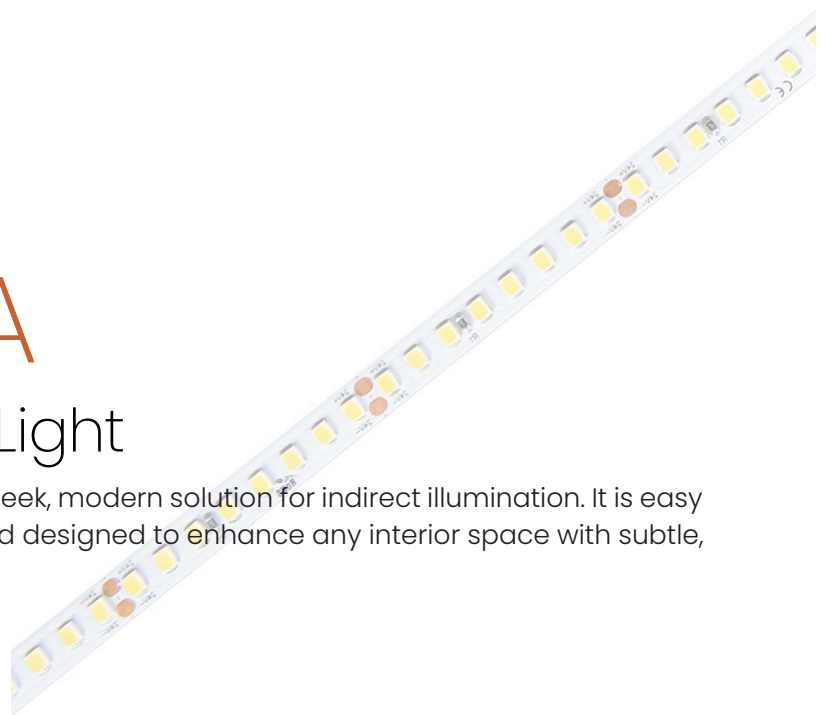




Auriga


LED SMD Strip Light

ACU ST 17041

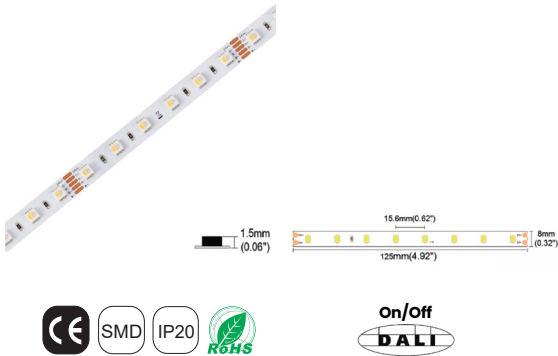

Wattage	Beam angle
19.2 W/m	120°
Color Temperature	Lumen Output
RGBW3000K	700 Lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimention	Cutting Section
W 12mm x H 2.1mm, L-5000mm	100mm / 6 Leds

ACU ST 17047

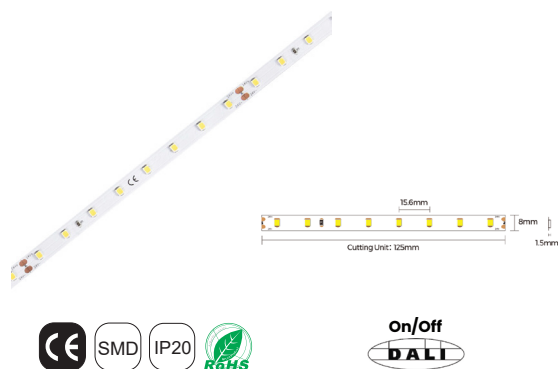


Wattage	Beam angle
4.8 W/m	120°
Color Temperature	Lumen Output
3000k	540 Lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimention	Cutting Section
W 8mm x H 1.5mm, L-5000mm	125mm / 8 Leds

Auriga


LED SMD Strip Light

ACU ST 17048

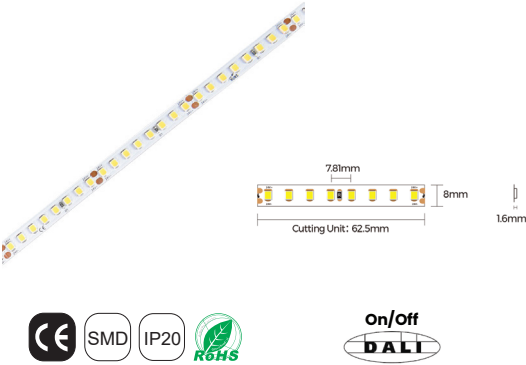

Wattage	Beam angle
9.6 W/m	120°
Color Temperature	Lumen Output
3000k	1090 Lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimension	Cutting Section
W 8mm x H 1.6mm, L-5000mm	62.5mm / 8 Leds

ACU ST 17049C

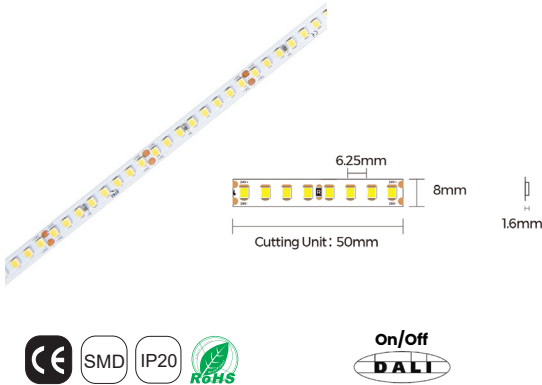


Wattage	Beam angle
14.4 W/m	120°
Color Temperature	Lumen Output
3000k	1585 Lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimension	Cutting Section
W 8mm x H 1.6mm, L-5000mm	50mm / 8 Leds

Auriga

LED COB Strip Light

ACU ST 202003

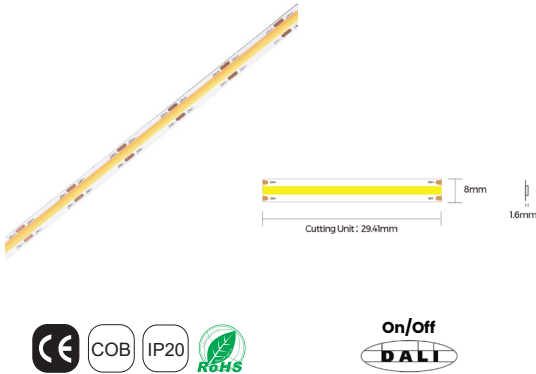

Wattage	Beam angle
10 W/m	120°
Color Temperature	Lumen Output
3000k	980 lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimention	Cutting Section
W 8mm x H 1.6mm, L-5000mm	29.4mm

ACU ST 202004



Wattage	Beam angle
5 W/m	120°
Color Temperature	Lumen Output
3000k	450 lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimention	Cutting Section
W 8mm x H 1.6mm, L-5000mm	29.4mm

AURIGA

IP67 LED Strip Light

Outdoor strip lighting offers a sleek, modern solution for indirect illumination. It is easy to install, energy-efficient, and designed to enhance any exterior space with subtle, continuous lighting.





Auriga


LED SMD Strip Light

ACU ST 17058



Wattage	Beam angle
9.6 W/m	120°
Color Temperature	Lumen Output
3000k	960 Lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimention	Cutting Section
W 10mm x H 4.8mm, L-5000mm	62.5mm / 8 Leds

ACU ST 17059C

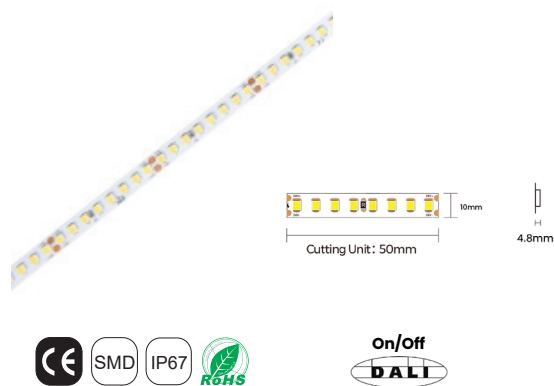


Wattage	Beam angle
14.4 W/m	120°
Color Temperature	Lumen Output
3000k	1395 Lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimention	Cutting Section
W 10mm x H 4.8mm, L-5000mm	50mm / 8 Leds

Auriga


LED SMD Strip Light

ACU ST 17059

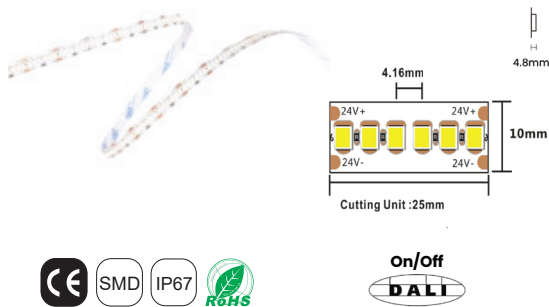

Wattage	Beam angle
19 W/m	120°
Color Temperature	Lumen Output
3000k	1445 Lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimention	Cutting Section
W 10mm x H 4.8mm, L-5000mm	25mm / 25 Leds

ACU ST 202101

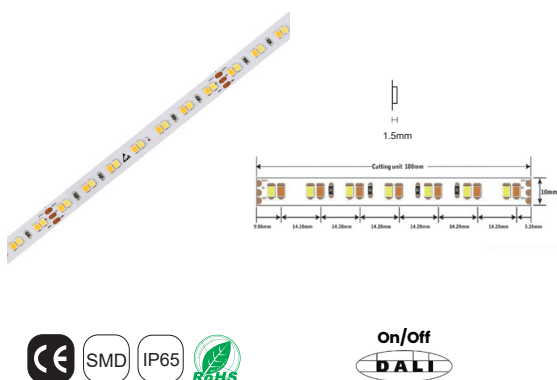


Wattage	Beam angle
19.2 W/m	120°
Color Temperature	Lumen Output
Tunable 2700K-6000K	1505 Lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimention	Cutting Section
W 10mm x H 1.5mm, L-5000mm	100mm / 14 Leds

Auriga

LED SMD Strip Light

ACU ST 202102

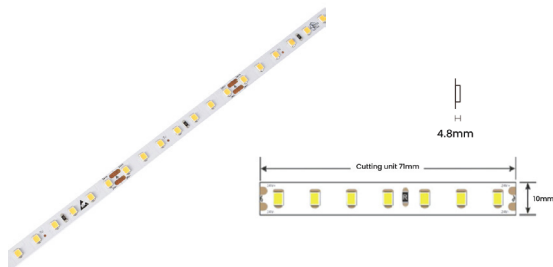

Wattage	Beam angle
10.1 W/m	120°
Color Temperature	Lumen Output
1900K Amber	830 Lm/m
2300K Amber	705 Lm/m
6000K	906 Lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimention	Cutting Section
W 10mm x H 4.8mm, L-5000mm	71.43mm / 7 Leds



Auriga


LED COB Strip Light

ACU ST 202001




Wattage	Beam angle
10 W/m	120°
Color Temperature	Lumen Output
3000k	790 Lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimension	Cutting Section
W 10mm x H 4.8mm, L-5000mm	29.41mm

ACU ST 202002

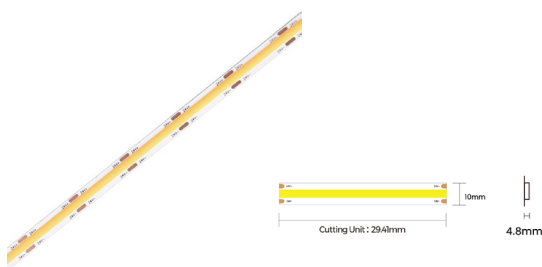

Wattage	Beam angle
5 W/m	120°
Color Temperature	Lumen Output
3000k	410 Lm/m
Installation	Rated life hours
Strip Light Accessories Profile & Clips	30000-50000H
CRI	Colors
≥90	☐ Transparent
Input Voltage	Material
24V DC	Strip Light
Dimension	Cutting Section
W 10mm x H 4.8mm, L-5000mm	29.41mm

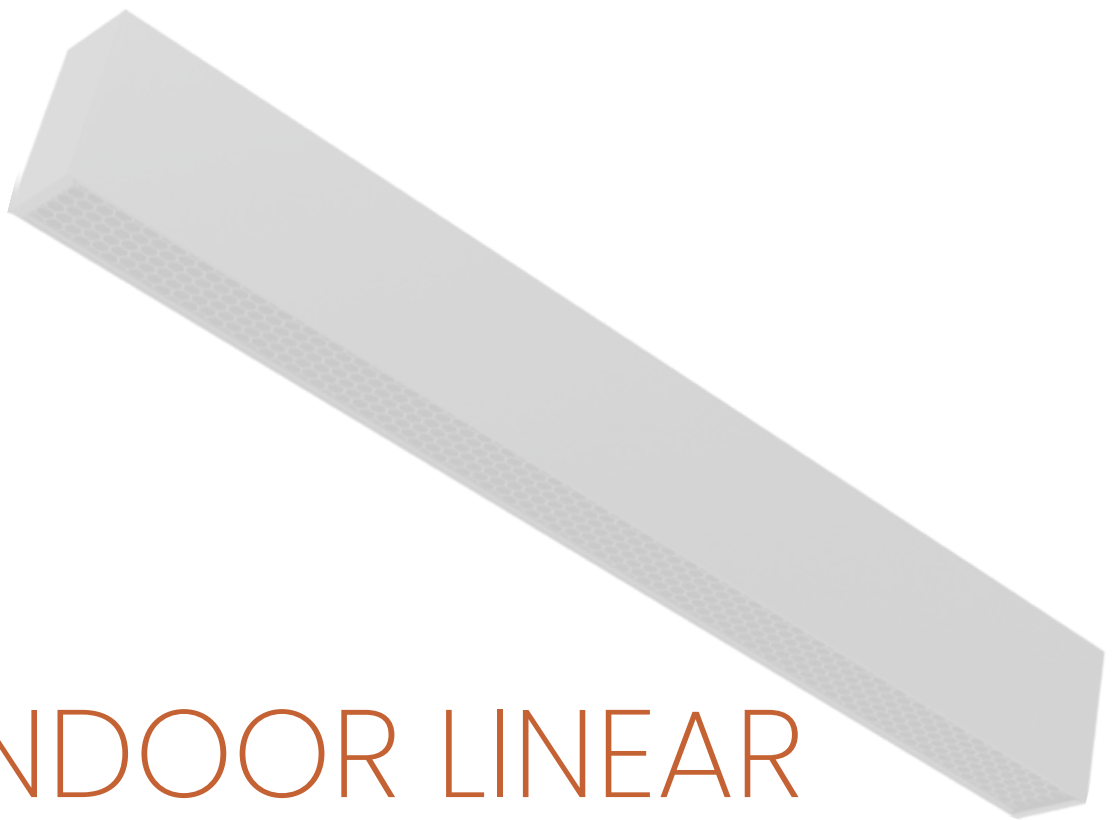

INDOOR LINEAR

Indoor linear lighting with an anti-glare diffuser ensures smooth, comfortable illumination while minimizing eye strain—perfect for modern, functional spaces.

INDOOR LINEAR
Honeycomb Diffuser

Surface Mounted | Suspended

Honeycomb Louver

ACU IL 240101SM



Wattage	Beam angle
34W	60°x75°
Color Temperature	Lumen Output
3000k	2085Lm
4000k	2195Lm
Installation	Rated life hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Power	Material
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum

ACU IL 240102SM



Wattage	Beam angle
46W	60°x75°
Color Temperature	Lumen Output
3000k	2820Lm
4000k	2965Lm
Installation	Rated life hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Power	Material
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum



ACU IL 240103SM



Wattage

51W

Beam angle

60°x75°

Color Temperature

3000k

4000k

Lumen Output

3125Lm

3290Lm

Installation

Surface Mounted

Rated life hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black

Power

220V AC
(Via the Attached Built in Driver)

Material

Powder Coated
Aluminum

ACU IL 240104SM



Wattage

68W

Beam angle

60°x75°

Color Temperature

3000K

4000K

Lumen Output

4165Lm

4385Lm

Installation

Surface Mounted

Rated life hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black

Power

220V AC
(Via the Attached Built in Driver)

Material

Powder Coated
Aluminum


INDOOR LINEAR
Louver Diffuser



Surface Mounted | Suspended


Louver

ACU IL 240201SM

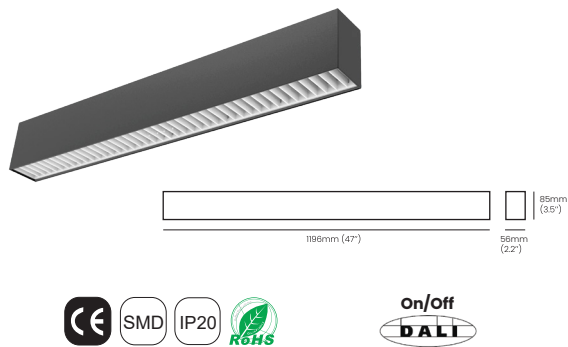



Wattage	Beam angle
34W	72°
Color Temperature	Lumen Output
3000k	1760Lm
4000k	1890Lm
Installation	Rated life hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Power	Material
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum

ACU IL 240202SM

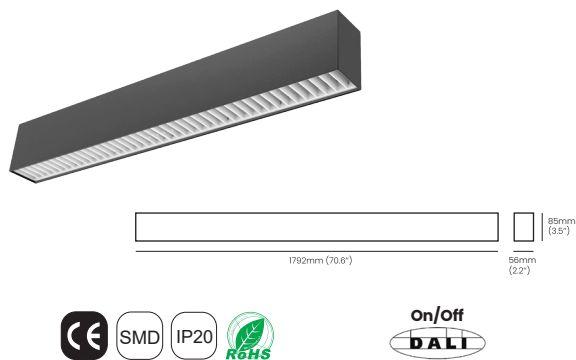

Wattage	Beam angle
51W	72°
Color Temperature	Lumen Output
3000k	2690Lm
4000k	2830Lm
Installation	Rated life hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Power	Material
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum

ACU IL 240203SM

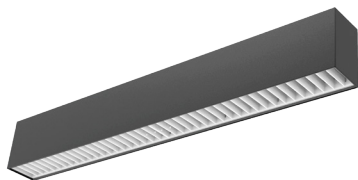

Wattage	Beam angle
68W	72°
Color Temperature	Lumen Output
3000k	3550Lm
4000k	3770Lm
Installation	Rated life hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Power	Material
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum


INDOOR LINEAR
Prismatic Diffuser



Surface Mounted | Suspended

Prismatic Diffuser

ACU IL 240301SM

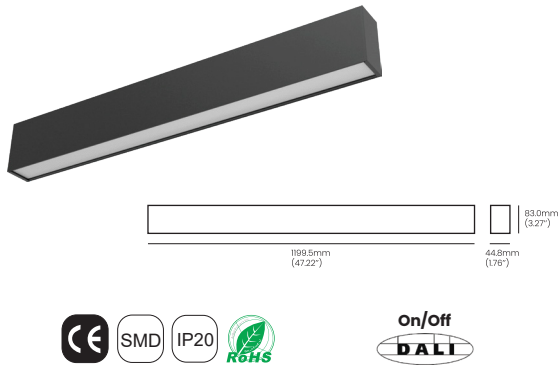

Wattage

28W

Beam angle

65°x70°

Color Temperature

3000k

4000k

Lumen Output

2745Lm

2890Lm

Installation

Surface Mounted

Rated life hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black


Power

220V AC
(Via the Attached Built in Driver)

Material

Powder Coated
Aluminum

ACU IL 240302SM

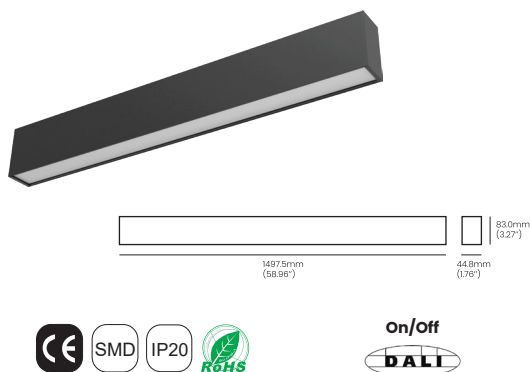

Wattage

34W

Beam angle

65°x70°

Color Temperature

3000k

4000k

Lumen Output

3335Lm

3510Lm

Installation

Surface Mounted

Rated life hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black


Power

220V AC
(Via the Attached Built in Driver)

Material

Powder Coated
Aluminum

ACU IL 240303SM



Wattage	Beam angle
40W	65°x70°
Color Temperature	Lumen Output
3000k	3920Lm
4000k	4130Lm
Installation	Rated life hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Power	Material
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum



INDOOR LINEAR
Recessed





Recessed

Indoor Linear

ACU IL 240401R



Wattage	Beam angle
19W	110°
Color Temperature	Lumen Output
3000k	1900Lm
4000k	2020Lm
Installation	Rated life hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Power	Material
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum

ACU IL 240402R



Wattage	Beam angle
27W	110°
Color Temperature	Lumen Output
3000k	2700Lm
4000k	2870Lm
Installation	Rated life hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Power	Material
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum

ACU IL 240403R



Wattage	Beam angle
38W	110°
Color Temperature	Lumen Output
3000k	3800Lm
4000k	4040Lm
Installation	Rated life hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Power	Material
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum

ACU IL 240404R



Wattage	Beam angle
27W	110°
Color Temperature	Lumen Output
3000k	2800Lm
4000k	2980Lm
Installation	Rated life hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Power	Material
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum

ACU IL 240405R



Wattage	Beam angle
---------	------------

38W	110°
-----	------

Color Temperature	Lumen Output
-------------------	--------------

3000k	3950Lm
4000k	4200Lm

Installation	Rated life hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	■ Black
-----	---------

Power	Material
-------	----------

220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum
---	---------------------------

ACU IL 240406R



Wattage	Beam angle
---------	------------

53W	110°
-----	------

Color Temperature	Lumen Output
-------------------	--------------

3000k	5510Lm
4000k	5860Lm

Installation	Rated life hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	■ Black
-----	---------

Power	Material
-------	----------

220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum
---	---------------------------

ACU IL 240407R



Wattage

38W

Beam angle

110°

Color Temperature

3000k

4000k

Lumen Output

3950Lm

4200Lm

Installation

Recessed

Rated life hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black


Power

220V AC
(Via the Attached Built in Driver)

Material

Powder Coated
Aluminum

ACU IL 240408R

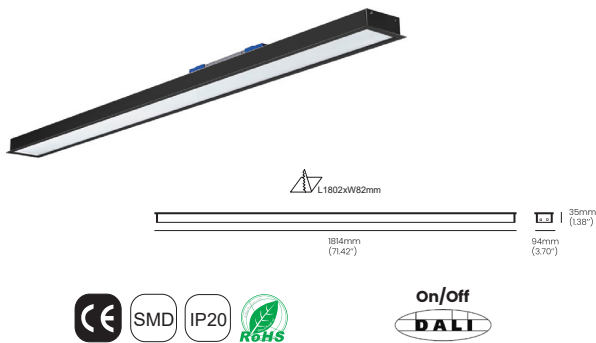

Wattage

60W

Beam angle

110°

Color Temperature

3000k

4000k

Lumen Output

6230Lm

6630Lm

Installation

Recessed

Rated life hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black

Power

220V AC
(Via the Attached Built in Driver)

Material

Powder Coated
Aluminum

ACU IL 240409R



Wattage	Beam angle
75W	110°
Color Temperature	Lumen Output
3000k	7790Lm
4000k	8290Lm
Installation	Rated life hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Power	Material
220V AC (Via the Attached Built in Driver)	Powder Coated Aluminum




METEOR MAGNETIC

24V DC

Grazer Light



Meteor Magnetic

ACU MM 243010



Wattage	Beam angle
6W	24° 38°
Color Temperature	Lumen Output
3000k	524Lm
4000k	536Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC


ACU MM 243011



Wattage	Beam angle
10W	24° 38°
Color Temperature	Lumen Output
3000k	1000Lm
4000k	1020Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC



ACU MM 243012

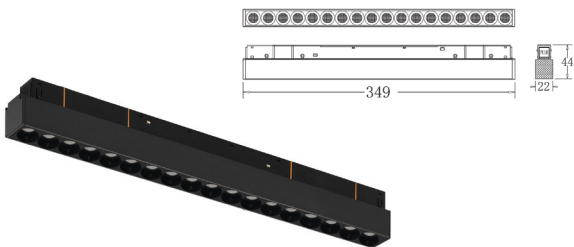

Wattage

16W

Beam angle

24° 38°

Color Temperature

3000k

4000k

Lumen Output

1527Lm

1556Lm

Installation

Magnetic System

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White


Input Voltage

24V DC

Materials

Aluminum + PC

ACU MM 243013

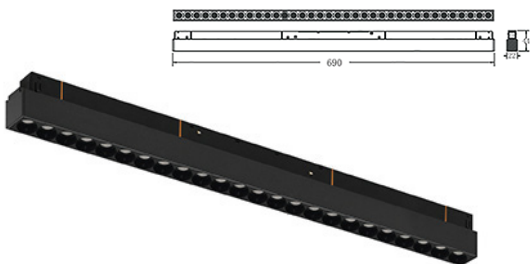

Wattage

24W

Beam angle

24° 38°

Color Temperature

3000k

4000k

Lumen Output

2012Lm

2057Lm

Installation

Magnetic System

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

24V DC

Materials


Aluminum + PC



linear Light

Meteor Magnetic

ACU MM 243020

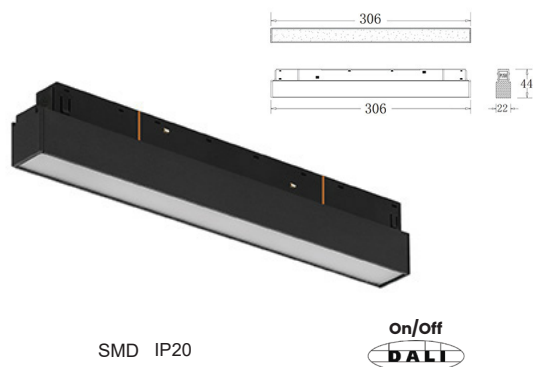

Wattage	Beam angle
10W	110°

Color Temperature	Lumen Output
3000k	864Lm
4000k	885Lm

Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H

CRI	Colors
	■ Black □ White

Input Voltage	Materials
24V DC	Aluminum + PC

ACU MM 243021



Wattage	Beam angle
16W	110°

Color Temperature	Lumen Output
3000k	1768Lm
4000k	1821Lm

Installation	Rated life hours
Magnetic System	30,000 - 50,000H


CRI	Colors
≥90	■ Black □ White

Input Voltage	Materials
24V DC	Aluminum + PC

Wall Washer

Meteor Magnetic

ACU MM 243065




Wattage	Beam angle
15W	33°
Color Temperature	Lumen Output
3000k	1000Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum

Spot Light

Meteor Magnetic


ACU MM 243030



Wattage	Beam angle
8W	38°
Color Temperature	Lumen Output
3000k	620Lm
4000k	638Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC



ACU MM 243031



Wattage

2x8W

Beam angle

24° 40°

Color Temperature

3000k

4000k

Lumen Output

1329Lm

1329Lm

Installation

Magnetic System

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White


Input Voltage

24V DC

Materials

Aluminum + PC

ACU MM 243032



Wattage

12W

Beam angle

15° 24° 38°

Color Temperature

3000k

4000k

Lumen Output

1396Lm

1438Lm

Installation

Magnetic System

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

24V DC

Materials

Aluminum + PC



Zoomable Light

Meteor Magnetic

ACU MM 243034



Wattage	Beam angle
10W	10° to 60°
Color Temperature	Lumen Output
3000k	739Lm
4000k	765Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC

ACU MM 243035




Wattage	Beam angle
16W	10° to 60°
Color Temperature	Lumen Output
3000k	1484Lm
4000k	1585Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC

Wide Spot Light

Meteor Magnetic

ACU MM 243036



Wattage

10W

Beam angle

10° 24° 36°

Color Temperature

3000k

4000k

Lumen Output

877Lm

899Lm

Installation

Magnetic System

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage


24V DC

Materials

Aluminum + PC

Adjustable Grazer

ACU MM 243040



Wattage

6W

Beam angle

24° 38°

Color Temperature

3000k

4000k

Lumen Output

469Lm

480Lm

Installation

Magnetic System

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

24V DC

Materials

Aluminum + PC



ACU MM 243041




Wattage	Beam angle
10W	24° 38°
Color Temperature	Lumen Output
3000k	1000Lm
4000k	1020Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC

ACU MM 243042



Wattage	Beam angle
16W	24° 38°
Color Temperature	Lumen Output
3000k	1527Lm
4000k	1556Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC


ACU MM 243043

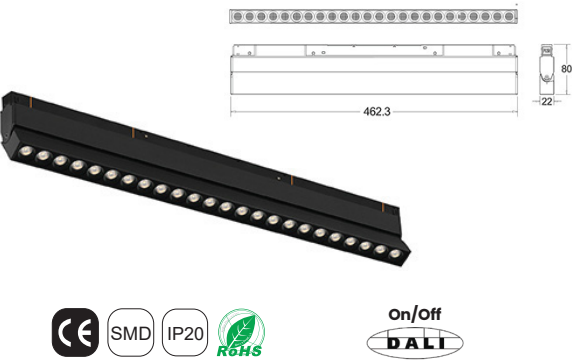

Wattage	Beam angle
24W	24° 38°
Color Temperature	Lumen Output
3000k	2012Lm
4000k	2057Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC


Adjustable Linear

ACU MM 243050

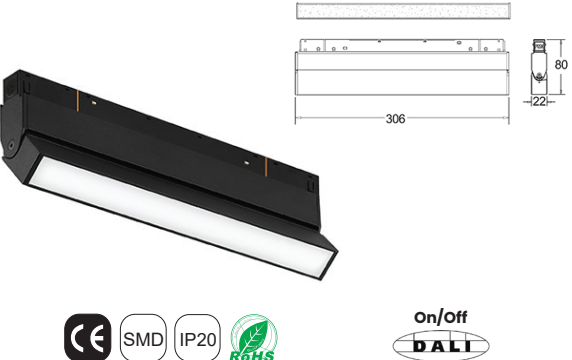

Wattage	Beam angle
10W	110°
Color Temperature	Lumen Output
3000k	864Lm
4000k	885Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC

ACU MM 243051

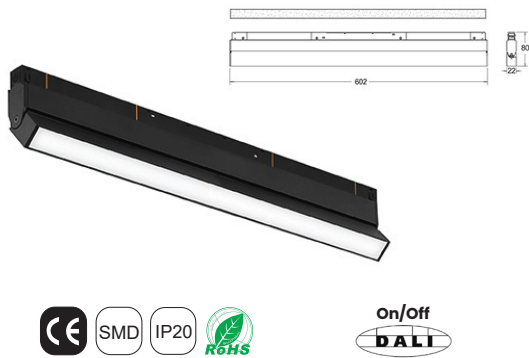

Wattage	Beam angle
16W	110°
Color Temperature	Lumen Output
3000k	1786Lm
4000k	1821Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC

Decorative Lights

ACU MM 243060



Wattage	Beam angle
10W	24° 40°
Color Temperature	Lumen Output
3000k	891Lm
4000k	910Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC




ACU MM 243061



Wattage	Beam angle
12W	24° 38°
Color Temperature	Lumen Output
3000k	576Lm
4000k	598Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC

ACU MM 243062

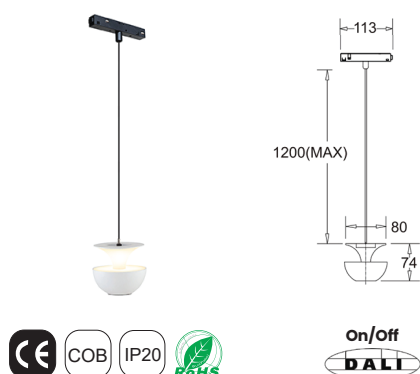

Wattage	Beam angle
6W	15° 24° 38°
Color Temperature	Lumen Output
3000k	315Lm
4000k	324Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + PC

ACU MM 243063



Wattage	Beam angle
6W	235°
Color Temperature	Lumen Output
3000k	375Lm
4000k	384Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + Glass

ACU MM 243064




Wattage	Beam angle
16W	110°
Color Temperature	Lumen Output
3000k	1063Lm
4000k	1092Lm
Installation	Rated Life Hours
Magnetic System	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC	Aluminum + Glass

Magnetic Track & **Accessories**

Before Gypsum Ceiling

ACU MMT 001BGR

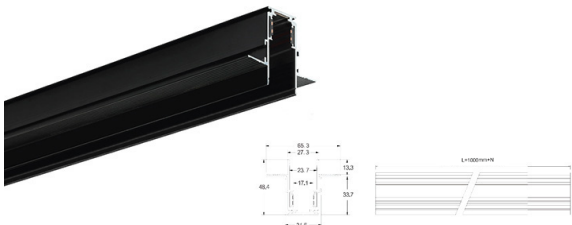

Installation	Colors
---------------------	---------------


Magnetic System	■ Black □ White
-----------------	-------------------

Materials

Aluminum + Copper



ACU MMT 002BGR

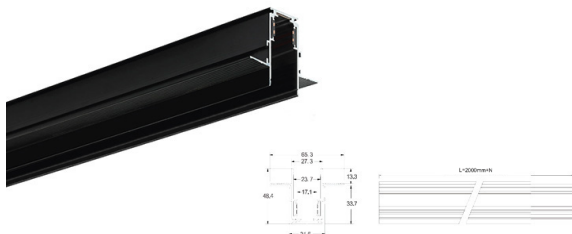

Installation	Colors
---------------------	---------------

Magnetic System	■ Black □ White
-----------------	-------------------

Materials

Aluminum + Copper



Before Gypsum Ceiling

ACU A/C MMT 001R



Materials	Colors
------------------	---------------

Aluminum + Copper	■ Black □ White
-------------------	-------------------


Installation

Recessed



ACU MMAC 0229BGR

Right Angle Connector

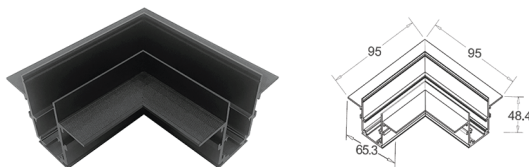

Materials	Colors
------------------	---------------

Aluminum	■ Black □ White
----------	-------------------

Installation


Magnetic System To Connect Between Two Track Rails Horizontally
--



Before Gypsum Ceiling

ACU MMAC 0230BGR

Outer Angle Connector



Materials

Aluminum

Colors

■ Black □ White


Installation

Magnetic System To Connect
Between Two Track Rails
Horizontally and Vertically
- Outer Side
- Ceiling → Wall



ACU MMAC 0231BGR

Inner Angle Connector



Materials

Aluminum

Colors

■ Black □ White

Installation


Magnetic System To Connect
Between Two Track Rails
Horizontally and Vertically
- Inner Side
- Ceiling → Wall
- Wall → Wall



Before Gypsum Ceiling

ACU MMAC 0236BGR

T Connector



Materials

Aluminum

Colors

■ Black □ White



Installation

Magnetic System To Connect
Between Three Track Rails Horizontally



ACU MMAC 0237BGR

X Connector



Materials

Aluminum

Colors

■ Black □ White


Installation

Magnetic System To Connect
Between Four Track Rails Horizontally



After Gypsum Ceiling

ACU MMT 001AGR

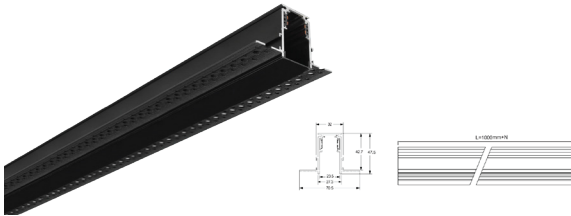

Installation

Magnetic System

Colors


■ Black □ White

Materials

Aluminum + Copper



ACU MMT 002AGR

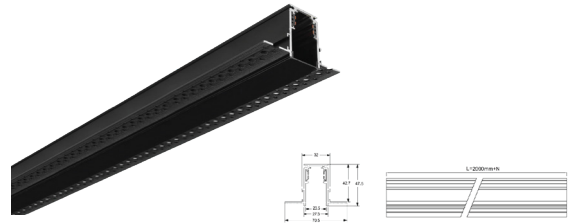

Installation

Magnetic System

Colors

■ Black □ White

Materials


Aluminum + Copper



After Gypsum Ceiling

ACU MMAC 0229AGR

Right Angle Connector

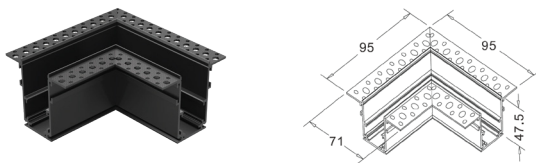

Installation

Magnetic System

Colors

■ Black □ White


Materials

Aluminum



ACU MMAC 0230AGR

Outer Angle Connector

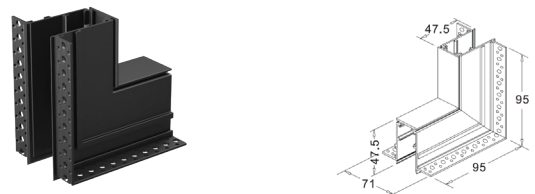

Installation

Magnetic System

Colors

■ Black □ White

Materials


Aluminum



After Gypsum Ceiling

ACU MMAC 0231AGR

Inner Angle Connector



Installation

Magnetic System

Colors

■ Black □ White


Materials

Aluminum



ACU MMAC 0236AGR

T Connector



Installation

Magnetic System

Colors

■ Black □ White

Materials



Aluminum



After Gypsum Ceiling

ACU MMAC 0237AGR

X Connector



Installation

Magnetic System

Colors

■ Black □ White


Materials

Aluminum



Surface Mounted

ACU MMT 001SM

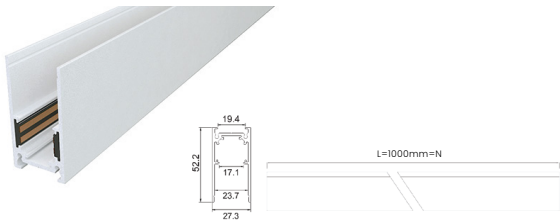

Installation	Colors
--------------	--------


Magnetic System	■ Black □ White
-----------------	-------------------

Materials

Aluminum + Copper



ACU MMT 002SM

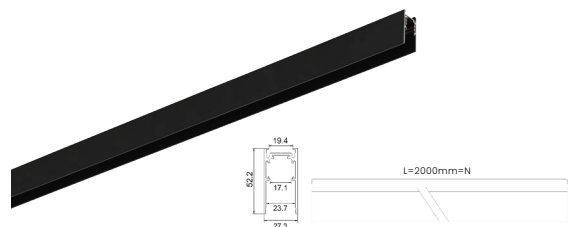

Installation	Colors
--------------	--------

Magnetic System	■ Black □ White
-----------------	-------------------

Materials


Aluminum + Copper



POWER

A ccessories

ACU MMAC 0212



Installation


Magnetic System

Colors

☐ White



ACU MMAC 0221



Installation

Magnetic System

4-side Power Connector



ACU MMAC 0222



Installation

Magnetic System


Colors

■ Black □ White

Power Connector



ACU MMAC 0223

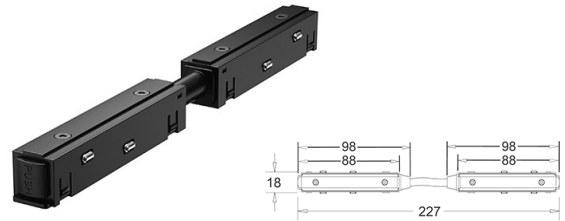

Installation

Magnetic System


Colors

■ Black □ White

Power Connector



ACU MMAC 0224

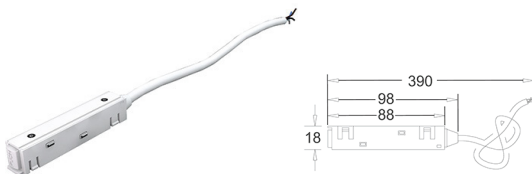

Installation

Magnetic System

Materials


Aluminum + Copper

Power Feeder



Track Light & Rail Accessories


220V AC

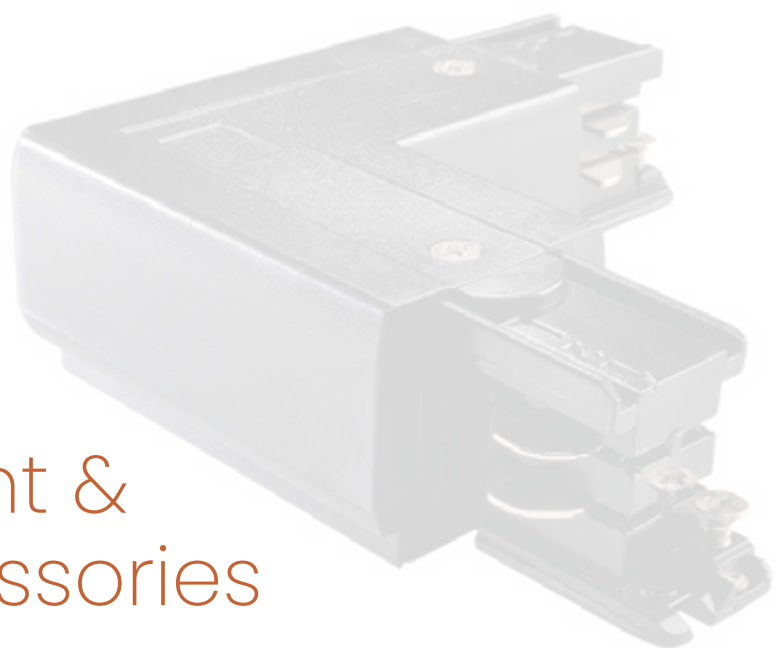

Mensa Track

Track Rail


ACU TR 0410R

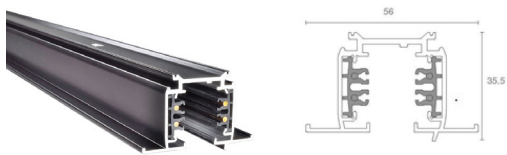

■ Black □ White

Installation	IP RATE
Recessed	20

ACU TR 0410S

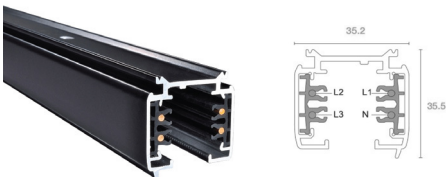

■ Black □ White

Installation	IP RATE
Surface Mounted	20



Mensa Track Accessories

Power Feeder

ACU PF 0431-L



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

ACU PF 0431-R



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

Mensa Track Accessories

ACU TA 0432

End Cap



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

ACU TA 0433

Fixed Straight Power Joiner (M & E)



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

Mensa Track Accessories

ACU PF 0434

Middle Power Feeder



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

ACU TA 0434C

Cover for Middle Connector



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

Mensa Track Accessories


Adjustable Connector

ACU TA 0435 Adj



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

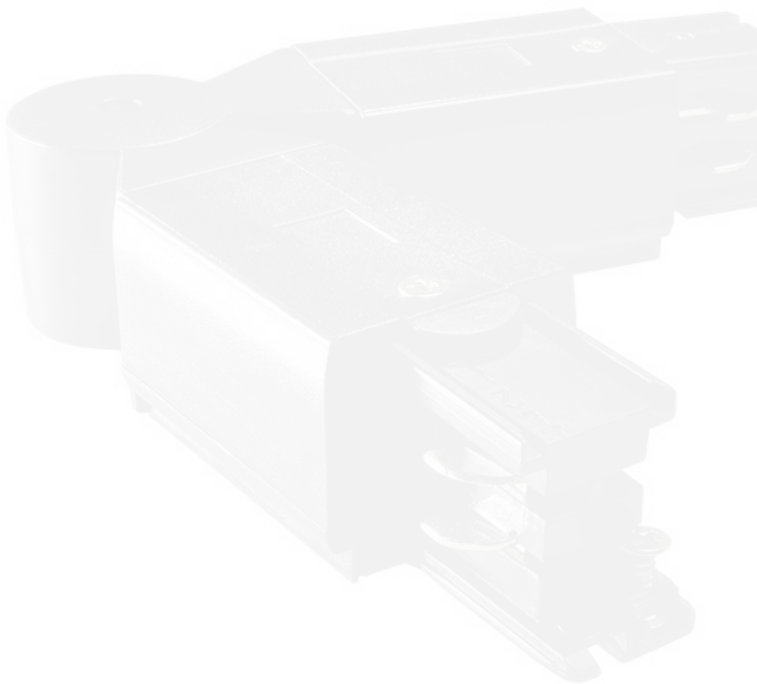

Mensa Track Accessories

L & R Connector Left Side

ACU TA 0435-L



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

ACU TA 0435-R



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

Mensa Track Accessories

Cover for L-Connector

ACU TA 0435C



■ Black □ White


Installation	IP RATE
Accessorry with Track Rail	20

Mensa Track Accessories

Twisted T Connector L1→L2

Twisted T Connector R1→R2

ACU TA 0436-L



Black White

Installation	IP RATE
Accessorry with Track Rail	20

ACU TA 0436-R



Black White

Installation	IP RATE
Accessorry with Track Rail	20

Mensa Track Accessories


Cover for T-Connector

ACU TA 0436C



Black White

Installation	IP RATE
Accessorry with Track Rail	20

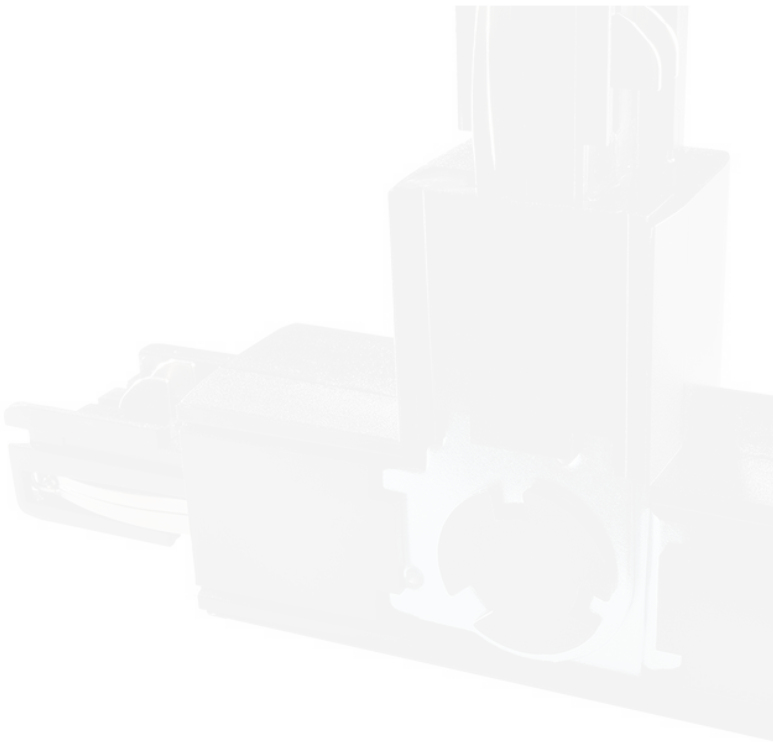

Mensa Track Accessories

ACU TA 0437

X Connector




■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

ACU TA 0437C

Cover for X-Connector



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

Mensa Track Accessories

ACU TA 0438

Twisted L Connector (L & R)



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

ACU TA 0439

Flexible Track Rail Connector



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20

Mensa Track Accessories


Coupler / Fixed Straight Joiner

ACU TA M0433



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

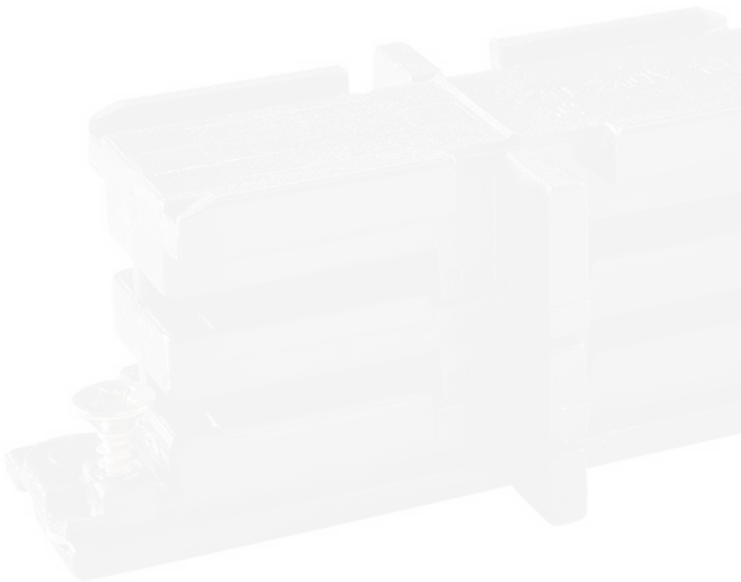

Mensa Track – DALI

Track Rail


ACU TR 0610R



■ Black □ White

Installation	IP RATE
Recessed	20
DALI	

ACU TR 0610S



■ Black □ White

Installation	IP RATE
Surface Mounted	20
DALI	

Mensa Track Accessories – Dali

Power Feeder Left Side – DALI

ACU PF 0631-L



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20
DALI	

ACU PF 0631-R



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20
DALI	

Mensa Track Accessories – Dali

ACU PF 0631C

Cover for Power Feeder – DALI



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20
DALI	

ACU PF 0634

Middle Power Feeder – DALI




■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20
DALI	

Mensa Track Accessories – Dali

Coupler / Fixed Straight Power Joiner – DALI

ACU TA 0633



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20
DALI	

Mensa Track Accessories – Dali

L Connector Left & Right Side – DALI

ACU TA 0635-L



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20
DALI	

ACU TA 0635-R




■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20
DALI	

Mensa Track Accessories – Dali

ACU TA 0637

X Connector – DALI



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20
DALI	

ACU TA 0638

Twisted L Connector (L & R)
DALI



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20
DALI	

Mensa Track Accessories – Dali

Flexible Connector – DALI

ACU TA 0639



■ Black □ White

Installation	IP RATE
Accessorry with Track Rail	20
DALI	

Suspension Accessories

ACU SA 04

Mounting Clamp Bracket



■ Black □ White

Installation	IP RATE
Suspension Accessory with Track Rail	20

ACU SA 0418

Suspension Connection Clamp



■ Black □ White

Installation	IP RATE
Suspension Accessory with Track Rail	20

Mensa Track Accessories

ACU SH 142

Suspension Hook




■ Black □ White

Installation	IP RATE
Suspension Accessory with Track Rail	20

ACU SR 0447

Ceiling Rod Suspension Kit




■ Black □ White

Installation	IP RATE
Suspension Accessory with Track Rail	20

Suspension Accessories

Suspension Kit (Wire)

ACU SW 0448



■ Black □ White

Installation	IP RATE
Suspension Accessory with Track Rail	20

Mono Track

Mono Track

ACU MT 100



■ Black □ White

Installation	IP RATE
Surface Mounted	20

ACU MT 150



■ Black □ White

Installation	IP RATE
Surface Mounted	20
DALI	



PAVO TRACK


Designed for use with 220V AC
track rail systems



Track Linear light

Rotatable Linear

ACU TL 244020



Wattage

9W

Beam angle

110°

Color Temperature

3000k

Lumen Output

515Lm

4000k

522Lm

Installation

Track Mounted

Rated life hours

30,000 – 50,000H

CRI

≥90

Colors

■ Black □ White


Input Voltage

220V AC with
the Attached Built in Driver

Material

Podwer Coated
Aluminum

ACU TL 244021



Wattage

18W

Beam angle

110°

Color Temperature

3000k

Lumen Output

1018Lm

4000k

1032Lm

Installation

Track Mounted

Rated life hours

30,000 – 50,000H

CRI

≥90

Colors

■ Black □ White


Input Voltage

220V AC with
the Attached Built in Driver

Material

Podwer Coated
Aluminum

ACU TL 244022

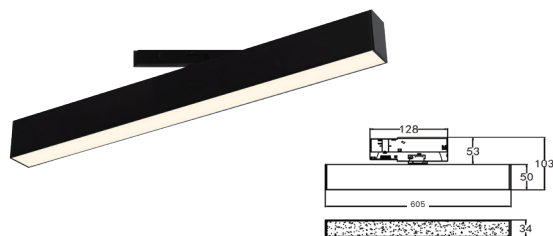

Wattage	Beam angle
24W	110°
Color Temperature	Lumen Output
3000k	2390Lm
4000k	2443Lm
Installation	Rated life hours
Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Built in Driver	Podwer Coated Aluminum




Adjustable Linear light

PAVO TRACK

Track Adjustable Linear light


Adjustable Linear

ACU TL 244025

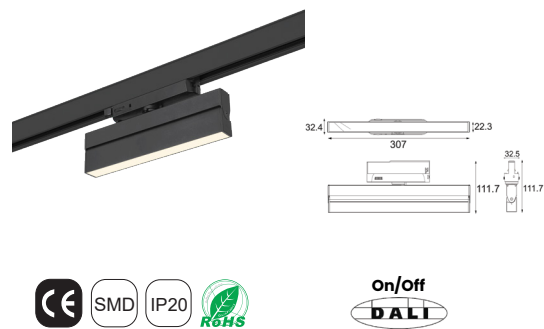

Wattage	Beam angle
9W	110°
Color Temperature	Lumen Output
3000k	498Lm
4000k	518Lm
Installation	Rated life hours
Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Built in Driver	Podwer Coated Aluminum

ACU TL 244026

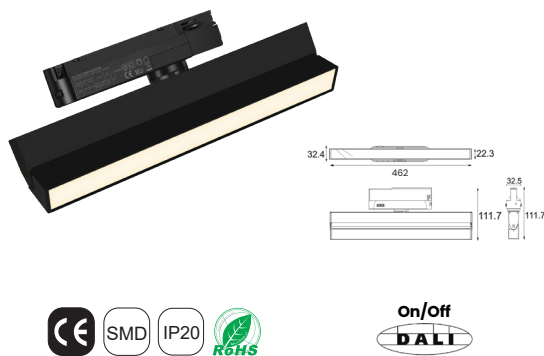

Wattage	Beam angle
18W	110°
Color Temperature	Lumen Output
3000k	1531Lm
4000k	1560Lm
Installation	Rated life hours
Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Built in Driver	Podwer Coated Aluminum

ACU TL 244027




Wattage	Beam angle
24W	110°
Color Temperature	Lumen Output
3000k	1981Lm
4000k	2028Lm
Installation	Rated life hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Built in Driver	Podwer Coated Aluminum

Track Grazer light


Grazer Light

ACU TL 244030




Wattage	Beam angle
9W	15°, 24°, 38°
Color Temperature	Lumen Output
3000k	521Lm
4000k	587Lm
Installation	Rated life hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Built in Driver	Podwer Coated Aluminum

ACU TL 244031



Wattage	Beam angle
18W	15°, 24°, 38°
Color Temperature	Lumen Output
3000k	1423Lm
4000k	1473Lm
Installation	Rated life hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Built in Driver	Podwer Coated Aluminum

ACU TL 244032

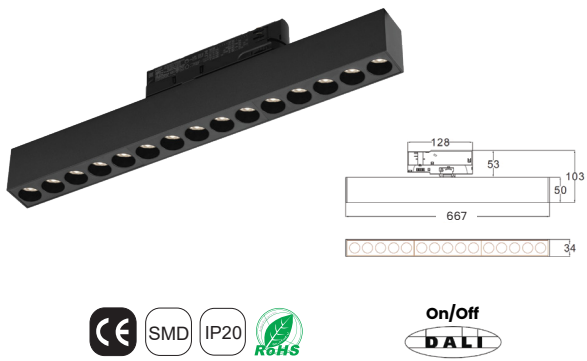

Wattage	Beam angle
24W	15°
Color Temperature	Lumen Output
3000k	2108Lm
4000k	2162Lm
Installation	Rated life hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Built in Driver	Podwer Coated Aluminum




Adjustable Grazer light

PAVO TRACK

Track Adjustable Grazer light


Adjustable Grazer Light

ACU TL 244035

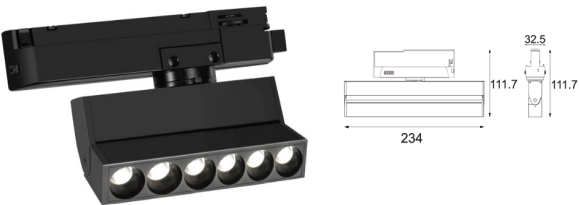


Wattage	Beam angle
9W	15°
Color Temperature	Lumen Output
3000k	539Lm
4000k	545Lm
Installation	Rated life hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Built in Driver	Podwer Coated Aluminum


ACU TL 244036

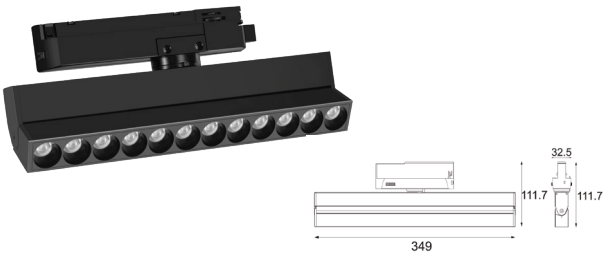

Wattage	Beam angle
18W	15°
Color Temperature	Lumen Output
3000k	1539Lm
4000k	1571Lm
Installation	Rated life hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Built in Driver	Podwer Coated Aluminum

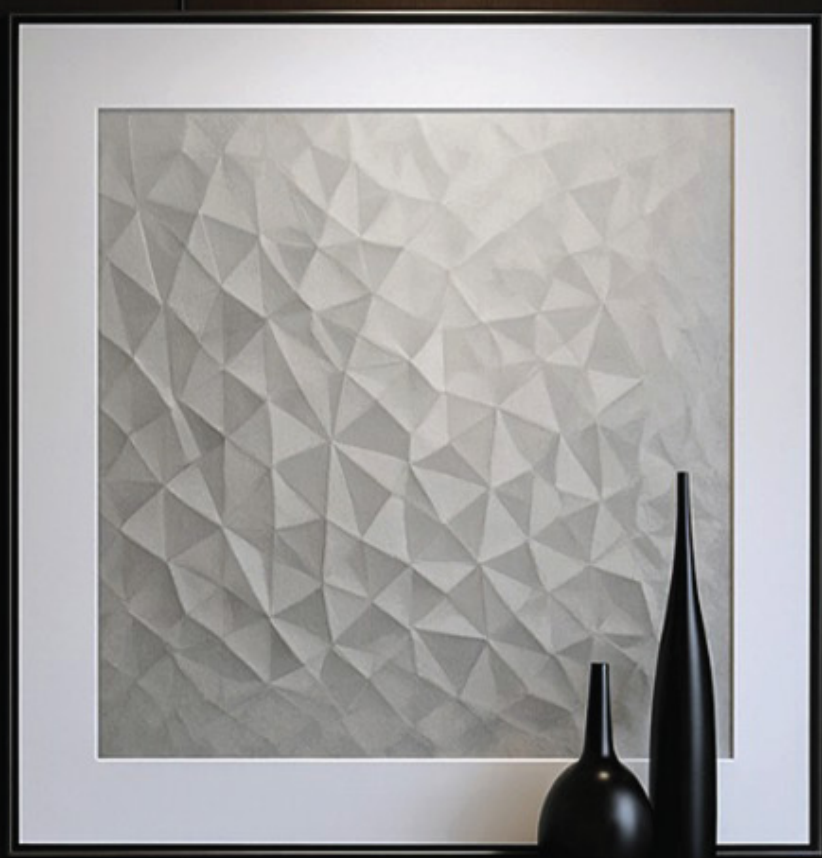


ACU TL 244037

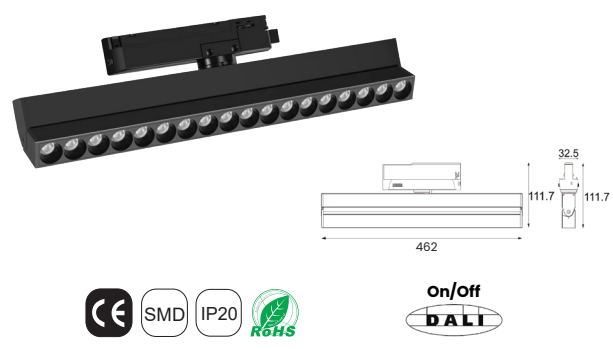

Wattage	Beam angle
24W	15°
Color Temperature	Lumen Output
3000k	2263Lm
4000k	2338Lm
Installation	Rated life hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Material
220V AC with the Attached Built in Driver	Podwer Coated Aluminum

HELENE COLLECTION

PS. Drivers are included with the lights for all operational functions.

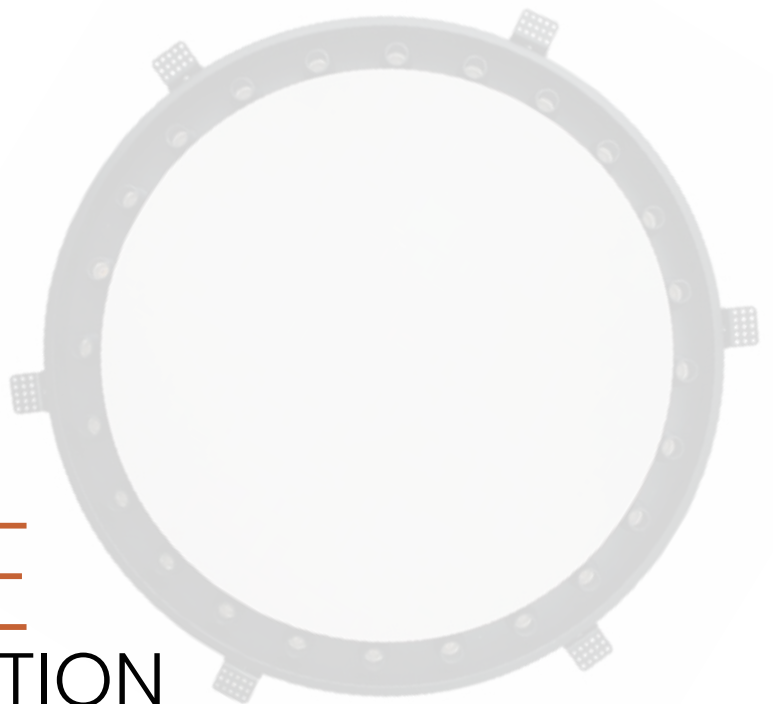

ACU 200801



Wattage	Beam angle
12x2W	12° 24° 36°
Color Temperature	Lumen Output
3000k	1800 Lm
4000k	1064 Lm
Installation	Rated Life Hours
Trimless Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC Via the Attached Remote Driver	Powder Coated Aluminium
Cutting Section	
Cut Out Ø305mm	

ACU 200802



Wattage	Beam angle
24x2W	12° 24° 36°
Color Temperature	Lumen Output
3000k	3600 Lm
4000k	4128 Lm
Installation	Rated Life Hours
Trimless Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC Via the Attached Remote Driver	Powder Coated Aluminium
Cutting Section	
Cut Out Ø605mm	

ACU 200803



Wattage	Beam angle
36x2W	12° 24° 36°
Color Temperature	Lumen Output
3000k	5400 Lm
4000k	6192 Lm
Installation	Rated Life Hours
Trimless Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC Via the Attached Remote Driver	Powder Coated Aluminium
Cutting Section	
Cut Out Ø905mm	



PONTO COLLECTION


24V DC

Featuring a unified base, effortless installation, and a diverse range that blends general, accent, and decorative lighting—Ponto stands out as the ultimate lighting solution.

Ponto Base

Trimless

ACU BS 240000T

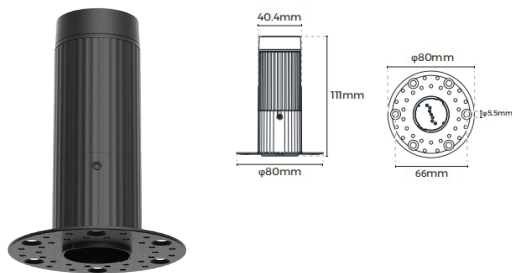


Wattage	Rated Current
Up to 72W	3A
Open Size	Input voltage
φ45mm	24V DC Rated
Installation	Maximum load
Trimless	8Kg
Warranty	Colors
5 years	■ Black
 	□ White

Ponto Base

Recessed

ACU BSC 240000R

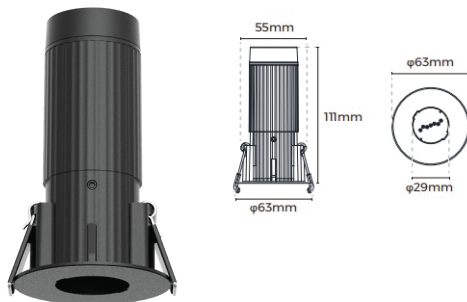

Wattage	Rated Current
Up to 72W	3A
Open Size	Input voltage
φ56mm	24V DC Rated
Installation	Maximum load
Recessed	1Kg
Warranty	Colors
5 years	■ Black
 	□ White

PONTO SPOT LIGHT

Fixed


ACU PS 241000



Wattage	Beam angle
3W	15° 25°
Color Temperature	Lumen Output
3000k	135Lm
4000k	172Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	
24V DC	


Adjustable

ACU PTS 241001

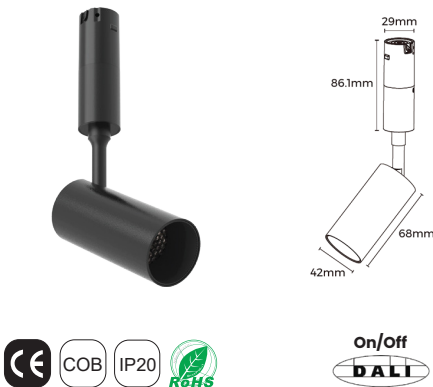

Wattage	Beam angle
6W	24° 36°
Color Temperature	Lumen Output
3000k	375Lm
4000k	500Lm , 400Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	
24V DC	

ACU PTS 241002



Wattage	Beam angle
14W	15° 24° 36°
Color Temperature	Lumen Output
3000k	1030Lm
4000k	1100Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	
24V DC	



PONTO ZOOMABLE LIGHT

ACU PTZ 241101



Wattage	Beam angle
5W	12°-50°
Color Temperature	Lumen Output
3000k	282Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	
24V DC	

ACU PTZ 241102




Wattage	Beam angle
12W	15°-36°
Color Temperature	Lumen Output
3000k	660Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	
24V DC	

PONTO LINEAR


ROUND TUBE LIGHT

ACU PTL 241201

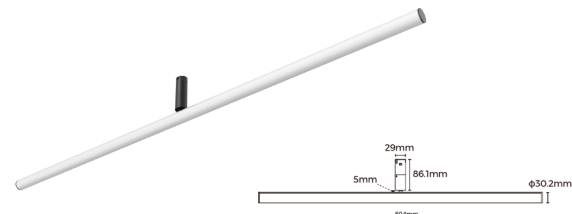

Wattage	Beam angle
12W	200° x 110°
Color Temperature	Lumen Output
3000k	1128Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Length
24V DC	604mm

ACU PTL 241202

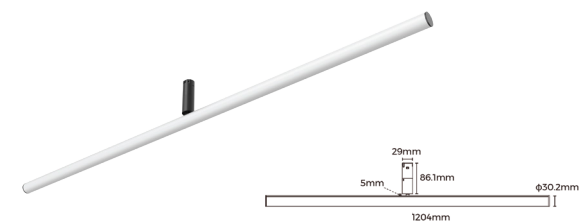


Wattage	Beam angle
24W	200° x 110°
Color Temperature	Lumen Output
3000k	2256Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR


Normal Diffuser

ACU PTL 241301

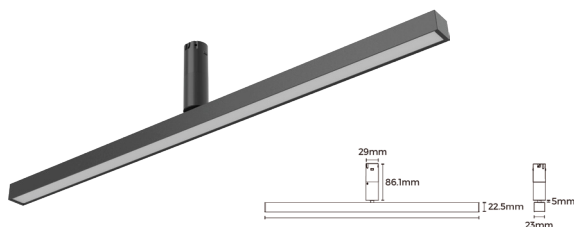

Wattage	Beam angle
12W	110°
Color Temperature	Lumen Output
3000k	840Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm

ACU PTL 241302

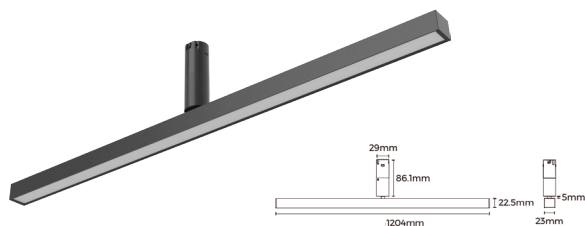


Wattage	Beam angle
24W	110°
Color Temperature	Lumen Output
3000k	1680Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR


Prismatic Diffuser

ACU PTL 241401

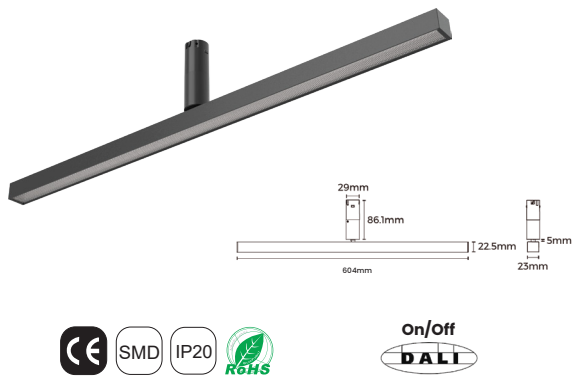

Wattage	Beam angle
12W	70°
Color Temperature	Lumen Output
3000k	900Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm

ACU PTL 241402

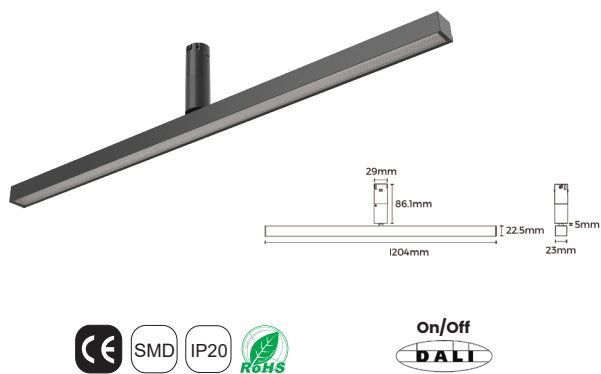


Wattage	Beam angle
24W	70°
Color Temperature	Lumen Output
3000k	1800Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR


Grating Diffuser

ACU PTL 241501

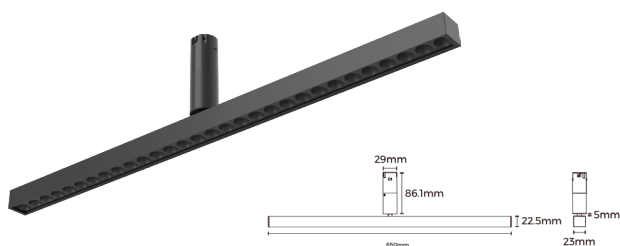

Wattage	Beam angle
13W	30°
Color Temperature	Lumen Output
3000k	858Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	650mm

ACU PTL 241502

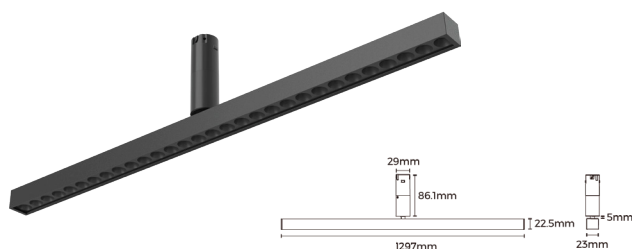


Wattage	Beam angle
26W	30°
Color Temperature	Lumen Output
3000k	1716Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1297mm

PONTO LINEAR


Asymmetric Diffuser

ACU PTL 241601

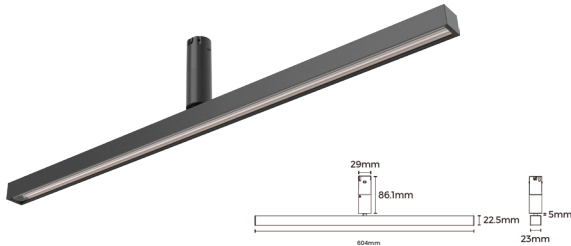

Wattage	Beam angle
12W	90° x 45° x 15°
Color Temperature	Lumen Output
3000k 4000k	1128Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm

ACU PTL 241602

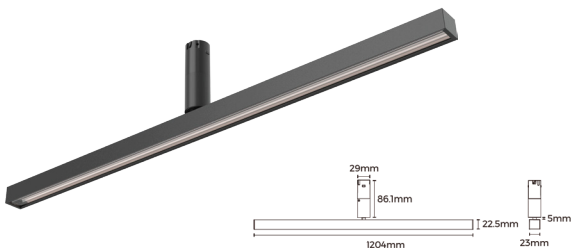


Wattage	Beam angle
24W	90° x 45° x 15°
Color Temperature	Lumen Output
3000k 4000k	2256Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR


Double Asymmetric Diffuser

ACU PTL 241701

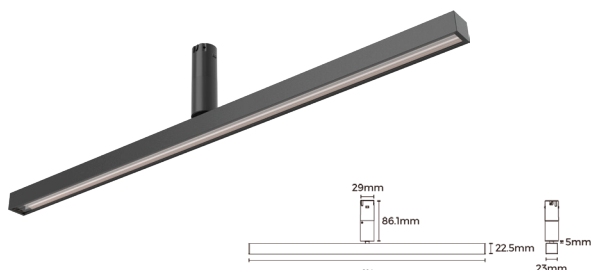

Wattage	Beam angle
12W	100° x 90° x 15°
Color Temperature	Lumen Output
3000k 4000k	1128Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm

ACU PTL 241702

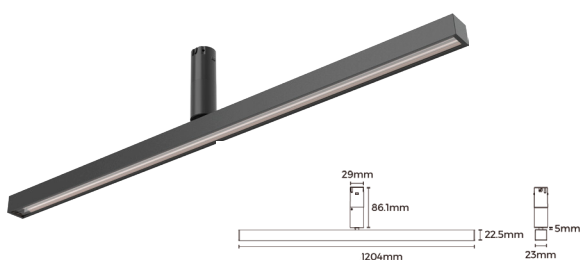


Wattage	Beam angle
24W	100° x 90° x 15°
Color Temperature	Lumen Output
3000k 4000k	2256Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm



Up-Down


Ponto Linear Light

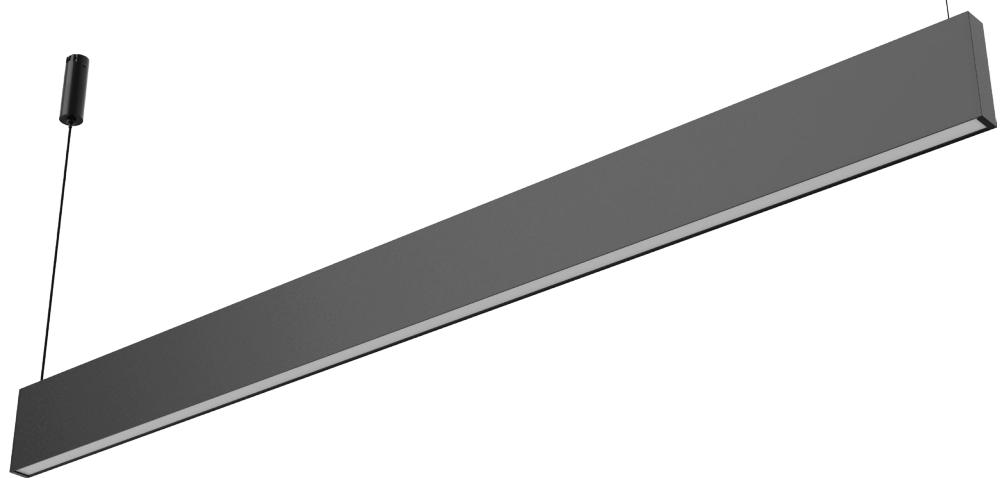

PONTO LINEAR

Normal Diffuser

ACU PTL 241801

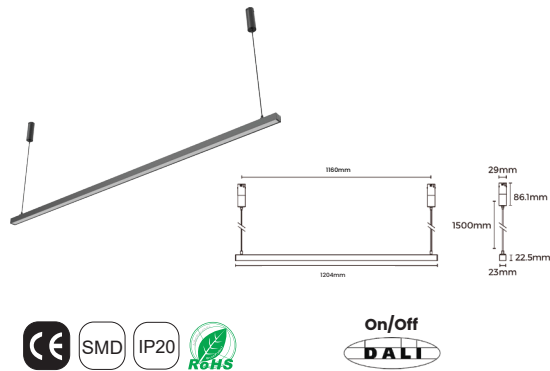


Wattage	Beam angle
24W	110°
Color Temperature	Lumen Output
3000k	1680Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR

With Prismatic Diffuser

ACU PTL 241901

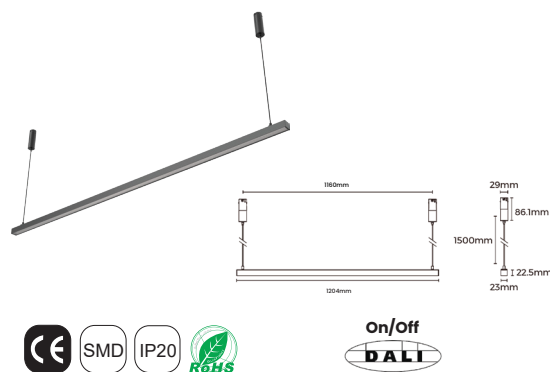


Wattage	Beam angle
24W	70°
Color Temperature	Lumen Output
3000k	1800Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR

Grating Diffuser

ACU PTL 242001

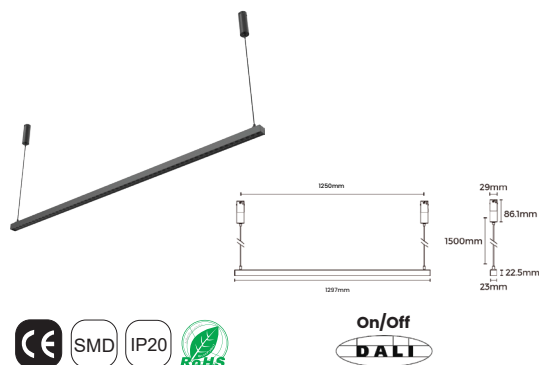


Wattage	Beam angle
26W	30°
Color Temperature	Lumen Output
3000k	1716Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1297mm

UP-DOWN PONTO LINEAR LIGHT

Normal Diffuser

ACU PTL 242101

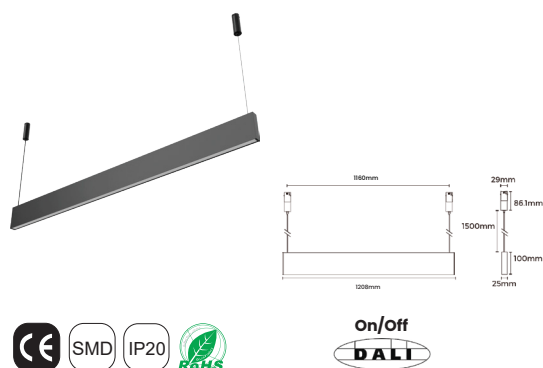


Wattage	Beam angle
48W	Up: 100° , Down: 100°
Color Temperature	Lumen Output
3000k	2688Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1208mm

UP-DOWN PONTO LINEAR LIGHT

Prismatic Diffuser

ACU PTL 242201

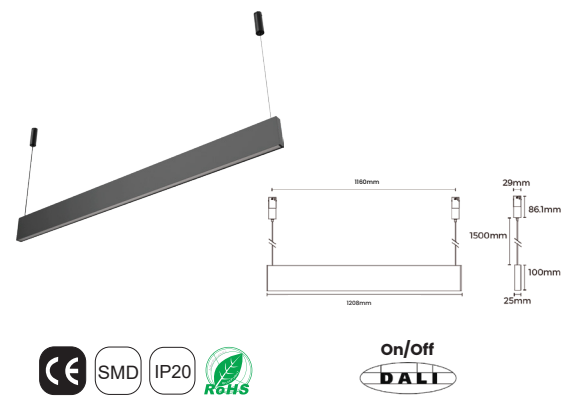


Wattage	Beam angle
48W	Up: 100° , Down: 100°
Color Temperature	Lumen Output
3000k	2784Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1208mm

UP-DOWN PONTO LINEAR LIGHT

Grating Diffuser


ACU PTL 242301

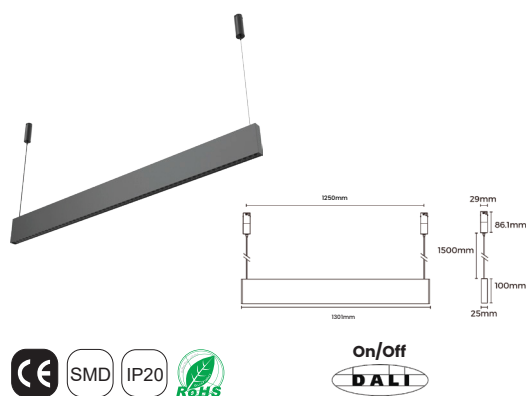

Wattage	Beam angle
53W	Up:100° , Down: 100°
Color Temperature	Lumen Output
3000k	2703Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1301mm

PONTO WALL WASHER

ACU WW 242401

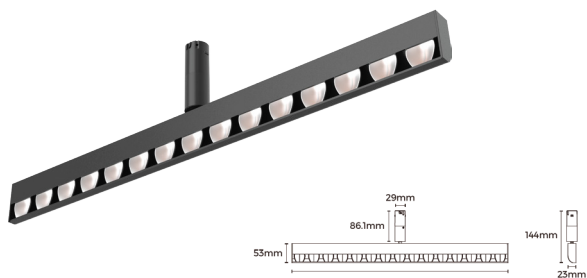

Wattage

10W

Beam angle

60° X 25° X 73°

Color Temperature

3000k

4000k

Lumen Output

846Lm

900Lm

Installation

On Recessed Base

Rated Life Hours

30,000 – 50,000H

CRI

≥90

Colors

■ Black


Input Voltage

24V DC

Length

604mm

ACU WW 242402

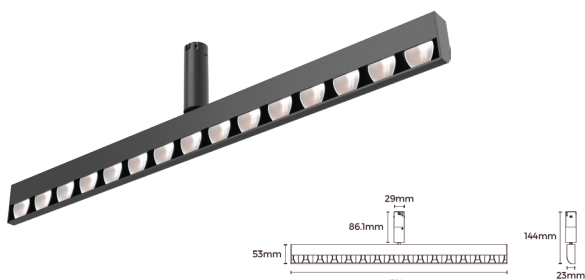

Wattage

20W

Beam angle

60° X 25° X 73°

Color Temperature

3000k

4000k

Lumen Output

1692Lm

1800Lm

Installation

On Recessed Base

Rated Life Hours

30,000 – 50,000H

CRI

≥90

Colors

■ Black

Input Voltage

24V DC

Length


1204mm



PONTO ROUND LIGHT


Neon Flex

ACU WW 242501

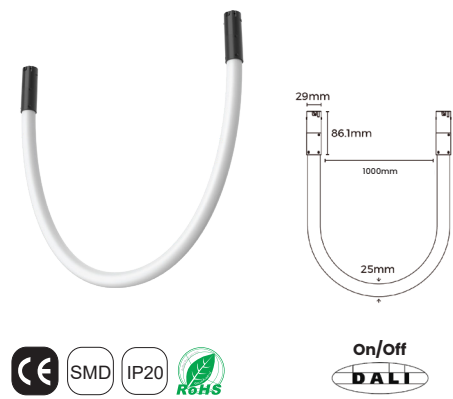

Wattage	Beam angle
14W	360°
Color Temperature	Lumen Output
3000k	920Lm
4000k	980Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Length
24V DC	1000mm

ACU WW 242502

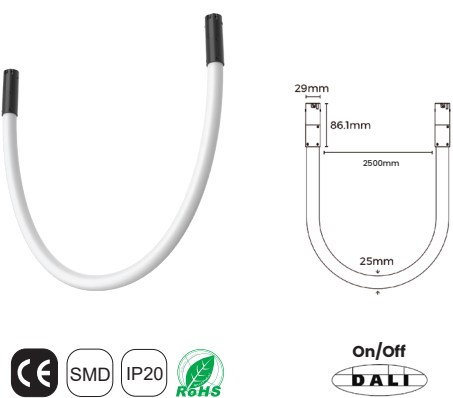


Wattage	Beam angle
35W	360°
Color Temperature	Lumen Output
3000k	2300Lm
4000k	2450Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Length
24V DC	2500mm


PONTO ROUND LIGHT

Neon Flex

ACU WW 242503

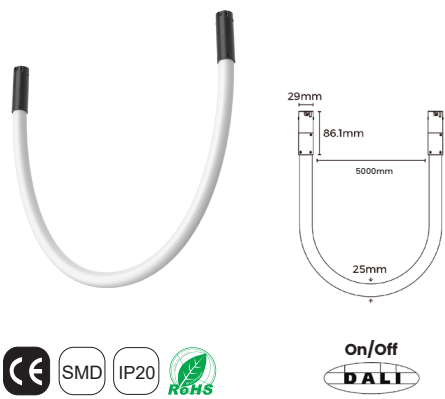


Wattage	Beam angle
70W	360°
Color Temperature	Lumen Output
3000k	4600Lm
4000k	4900Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Length
24V DC	5000mm

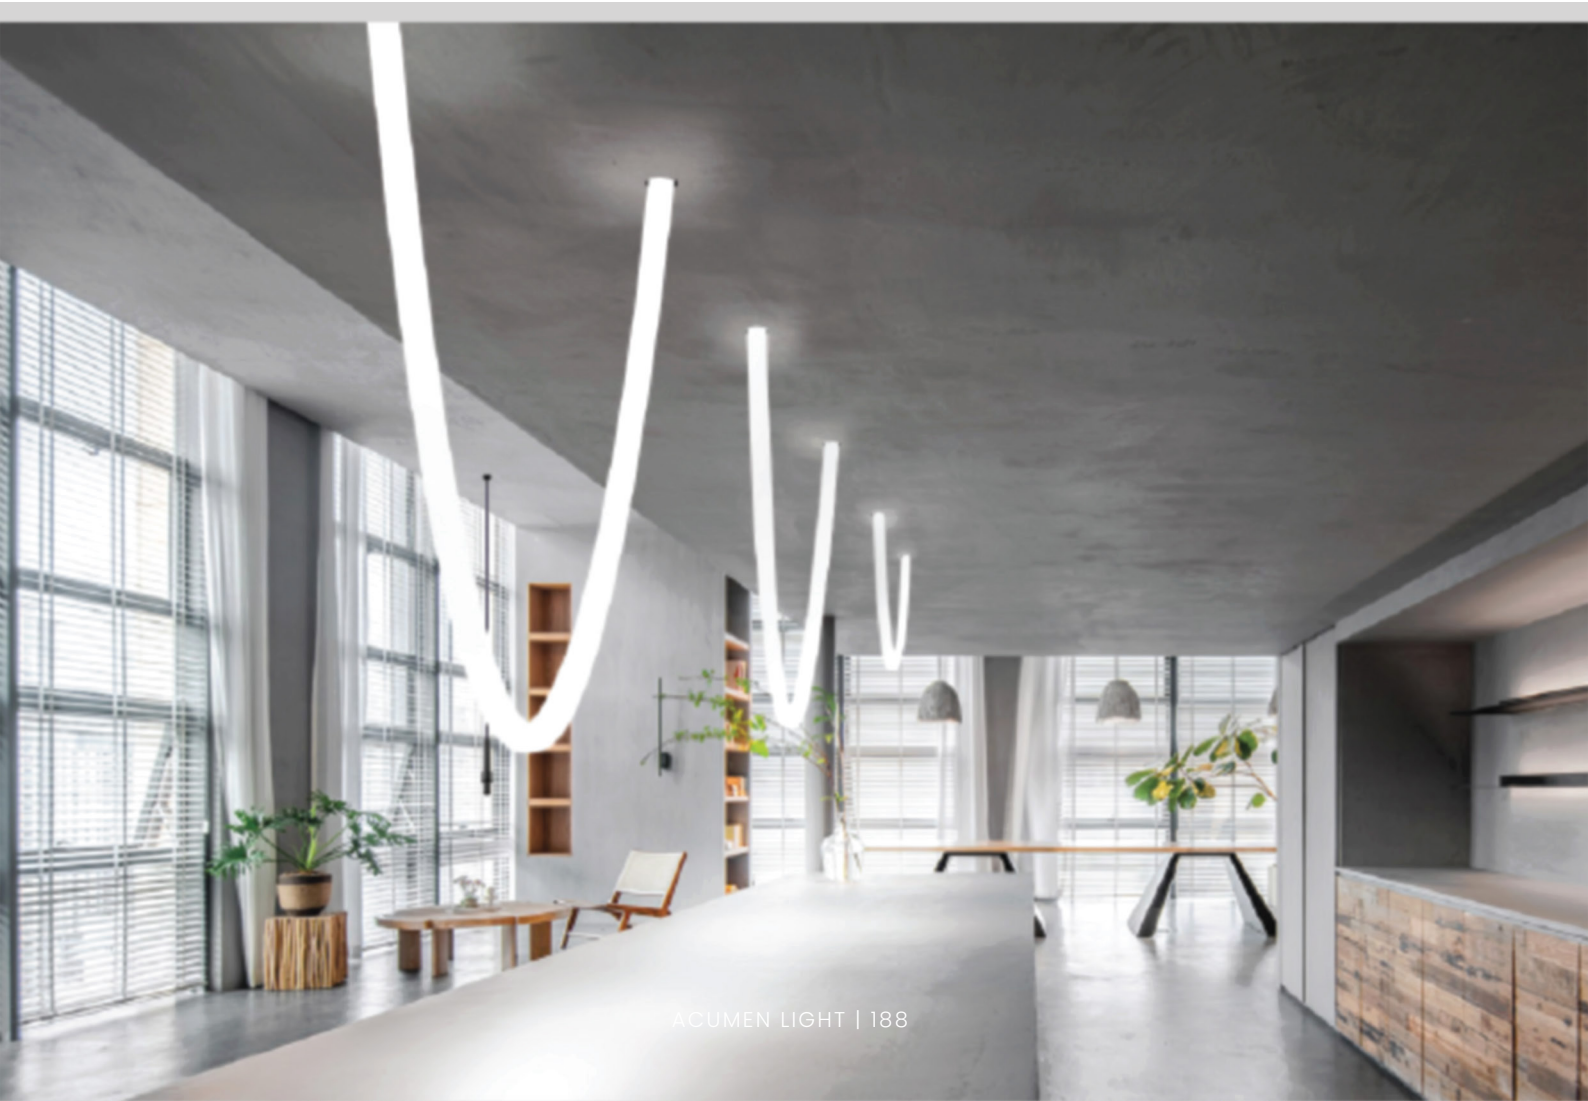

PONTO DECORATIVE

ACU PTD 242601

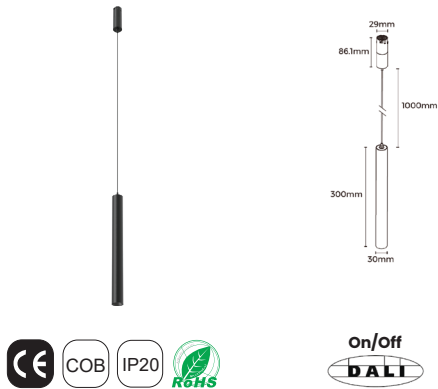

Wattage	Beam angle
6W	24°
Color Temperature	Lumen Output
3000k	370Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable

ACU PTD 242602




Wattage	Beam angle
6W	24°
Color Temperature	Lumen Output
3000k	370Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable



PONTO DECORATIVE

Neon Flex

ACU PTD 242603

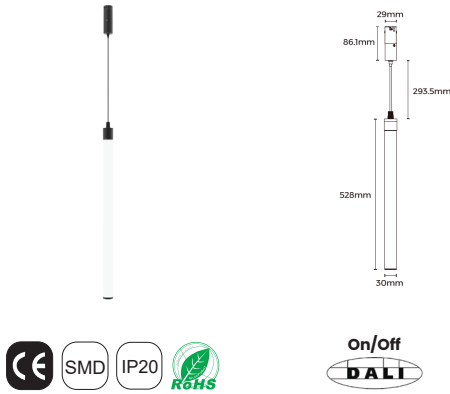

Wattage	Beam angle
7W	360°
Color Temperature	Lumen Output
3000k	460Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable

ACU PTD 242604



Wattage	Beam angle
6W	360°
Color Temperature	Lumen Output
3000k	560Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable



PONTO DECORATIVE

ACU PTD 242605



Wattage	Beam angle
4W	110°
Color Temperature	Lumen Output
3000k	340Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable

PONTO DECORATIVE

ACU PTD 242606



Wattage	Beam angle
3W	110°
Color Temperature	Lumen Output
1500k	170Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable



