


Design Collection

ACUMEN


www.acumenlight.com

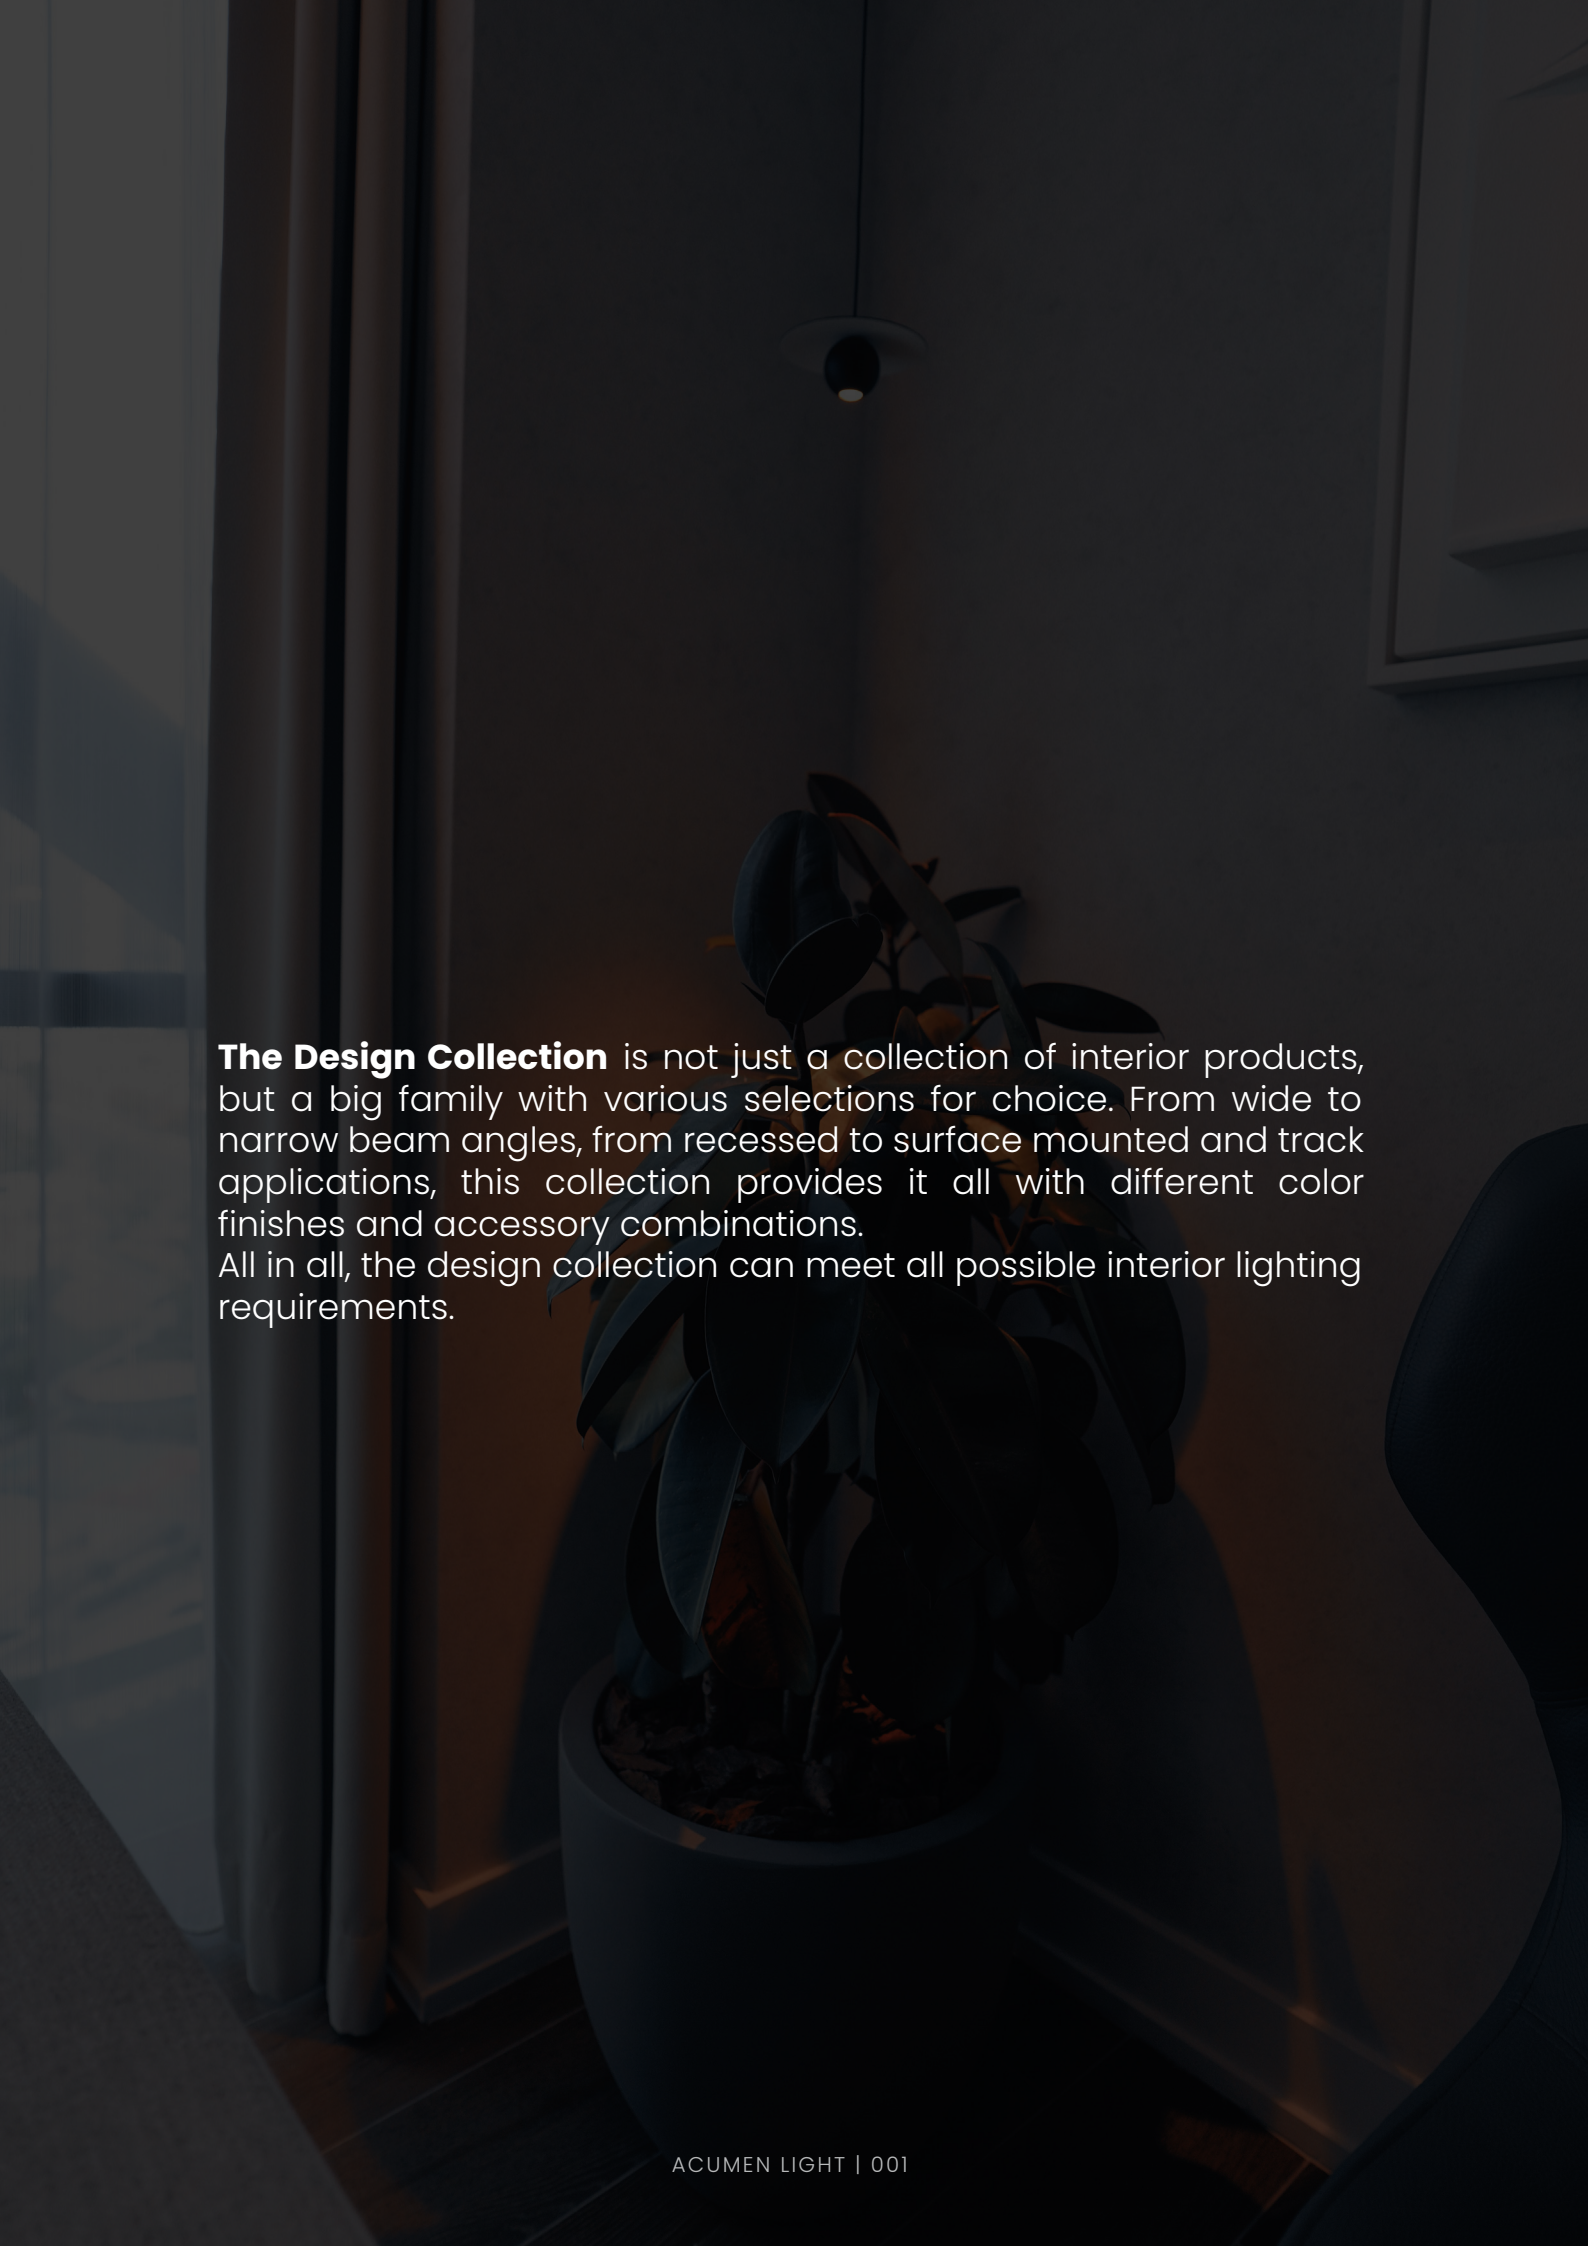

The Design Collection is not just a collection of interior products, but a big family with various selections for choice. From wide to narrow beam angles, from recessed to surface mounted and track applications, this collection provides it all with different color finishes and accessory combinations. All in all, the design collection can meet all possible interior lighting requirements.

DROP COLLECTION


PS. Drivers are included with the lights for all operational functions.

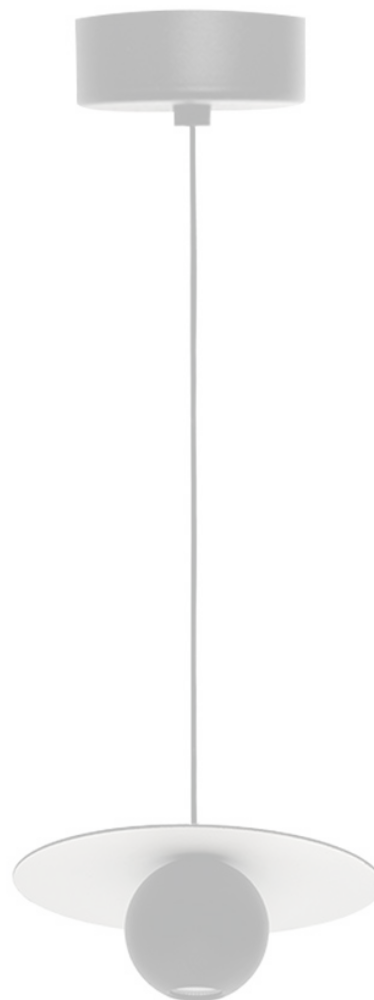




Pendant Light

ACU 238001

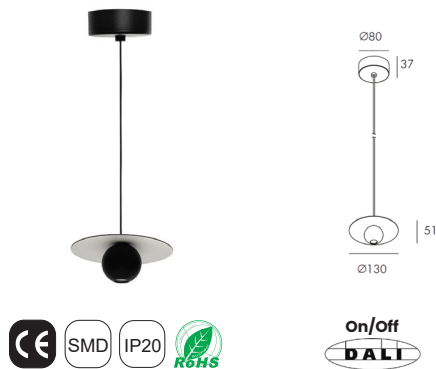


Wattage	Beam angle
5W	20° 35°
Color Temperature	Lumen Output
3000k	341 Lm
Installation	Rated Life Hours
Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC Via the Attached Built in Driver	Die Cast Aluminium

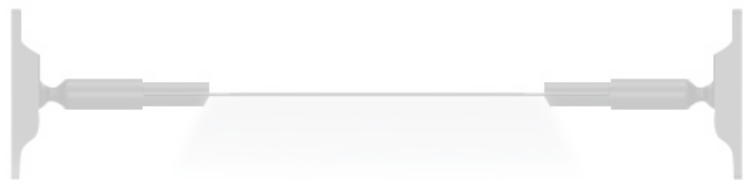

MOONLINE COLLECTION

PS. Drivers are included with the lights for all operational functions.

ACU MOON 01

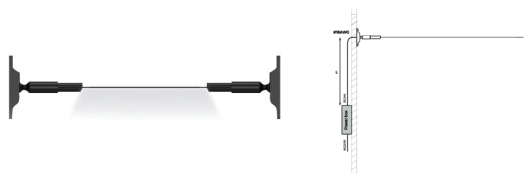

Wattage

10 W/mW

Beam angle

120°

Color Temperature

2700k 3000k
4000k 6000k

Lumen Output

≈1000Lm/m
≈1000Lm/m

Installation

Point to Point

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black

Input Voltage

220V AC Via the Attached
Remote Driver

Materials

Zinc alloy, spraying
surface, steel belt
(stainless steel)


Cutting Section

29.4mm

Dimension

L-6000mm

ACU MOON 02

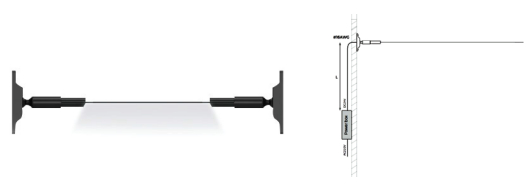

Wattage

13.5 W/mW

Beam angle

120°

Color Temperature

2700k 3000k
4000k 6000k

Lumen Output

≈1320 Lm/m
≈1320 Lm/m

Installation

Point to Point

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black

Input Voltage

220V AC Via the Attached
Remote Driver

Materials

Zinc alloy, spraying
surface, steel belt
(stainless steel)


Cutting Section

50mm

Dimension


L-6000mm

ACU MOON 03

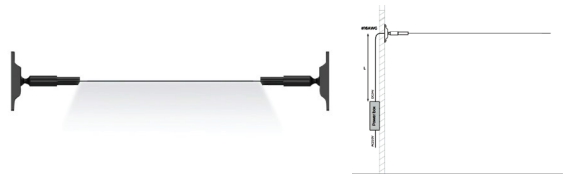


Wattage	Beam angle
8.7 W/m	120°
Color Temperature	Lumen Output
2700k 3000k	≈890 Lm/m
4000k 6000k	≈890 Lm/m
Installation	Rated Life Hours
Point to Point	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC Via the Attached Remote Driver	Zinc alloy, spraying surface, steel belt (stainless steel)
Cutting Section	Dimension
50mm	L-12000mm

ACU MOON 04

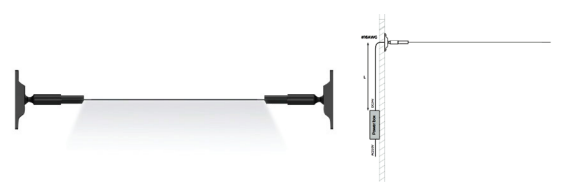

Wattage	Beam angle
8.7 W/m	120°
Color Temperature	Lumen Output
2700k 3000k	≈890 Lm/m
4000k 6000k	≈890 Lm/m
Installation	Rated Life Hours
Point to Point	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC Via the Attached Remote Driver	Zinc alloy, spraying surface, steel belt (stainless steel)
Cutting Section	Dimension
50mm	L-20000mm




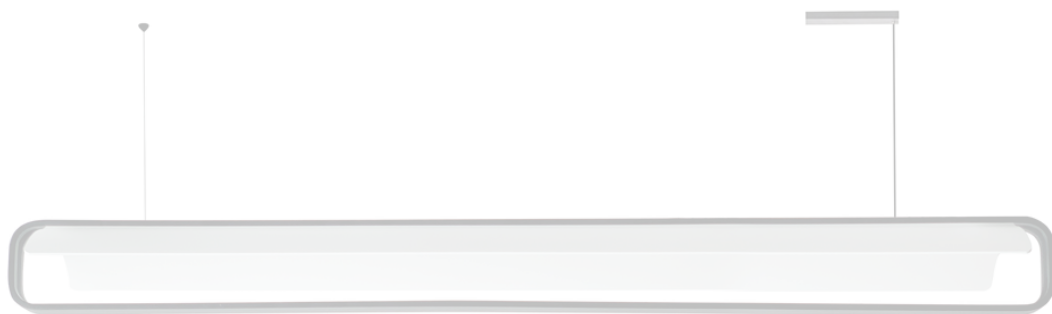

SLEEK COLLECTION


PS. Drivers are included with the lights for all operational functions.

ACU 235001

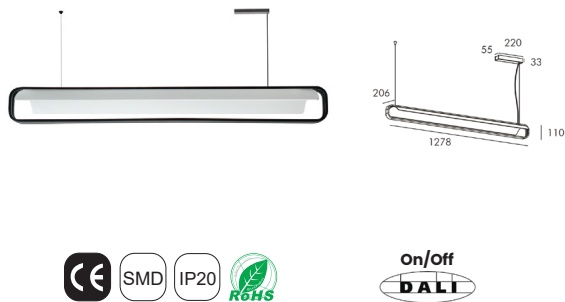


Wattage	Beam angle
27W	--
Color Temperature	Lumen Output
3000k	Decorative
4000k	Lumen Effect
Installation	Rated Life Hours
Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC Via the Attached Built in Driver	Die Cast Aluminium

ACU 235002

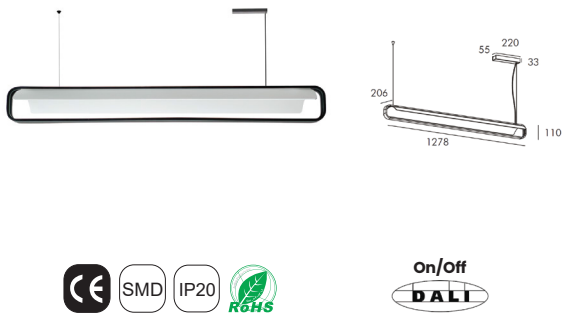



Wattage	Beam angle
35W	--
Color Temperature	Lumen Output
3000k	Decorative
4000k	Lumen Effect
Installation	Rated Life Hours
Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC Via the Attached Built in Driver	Die Cast Aluminium

ACU 235003

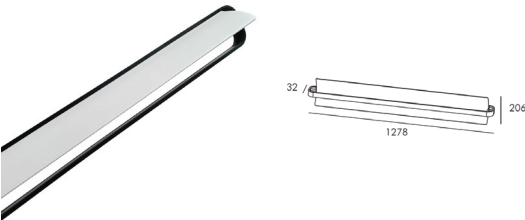


Wattage	Beam angle
20W	--
Color Temperature	Lumen Output
3000k	Decorative
4000k	Lumen Effect
Installation	Rated Life Hours
Surface mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC Via the Attached Built in Driver	Die Cast Aluminium

ACU 235004

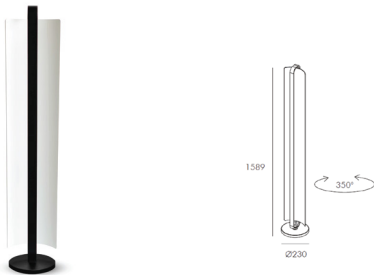

ROTARY DIMMABLE SWITCH


Wattage	Beam angle
35W	--
Color Temperature	Lumen Output
3000k	Decorative
4000k	Lumen Effect
Installation	Rated Life Hours
Floor Lamp	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC Via the Attached Built in Driver	Die Cast Aluminium

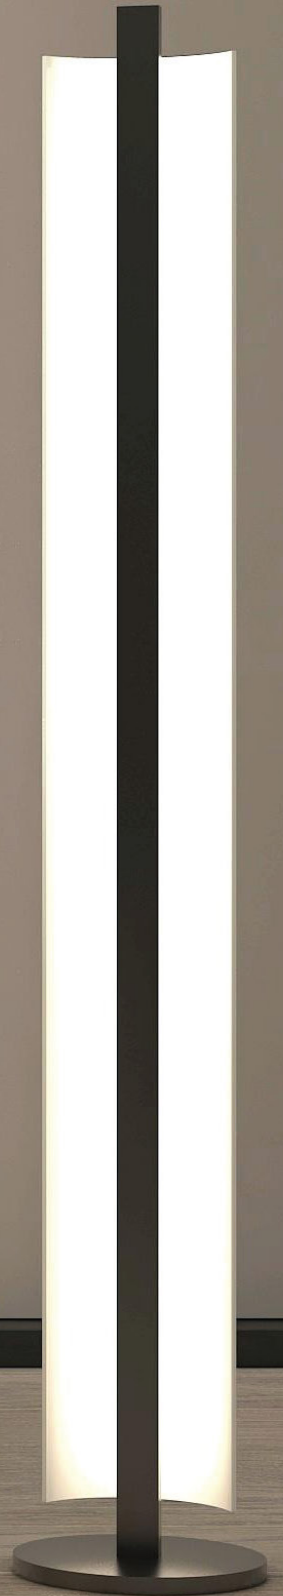

GLANCE COLLECTION

PS. Drivers are included with the
lights for all operational functions.

ACU 234001



Wattage

12W

Beam angle

110°

Color Temperature

3000k

4000k

Lumen Output

Decorative

Lumen Effect

Installation

Wall Mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC Via the Attached
Built in Driver

Materials

Iron + Aluminum

ACU 234002



Wattage

12W

Beam angle

110°

Color Temperature

3000k

4000k

Lumen Output

Decorative

Lumen Effect

Installation

Suspended

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC Via the Attached
Built in Driver

Materials

Iron + Aluminum




ORION COLLECTION

PS. Drivers are included with the lights for all operational functions.



ACU 236001



Wattage	Beam angle
7W	45°
Color Temperature	Lumen Output
3000k	Decorative
4000k	Lumen Effect
Installation	Rated Life Hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC Via the Attached Built in Driver	Die Casting Aluminium




STICK COLLECTION

PS. Drivers are included with the lights for all operational functions.



ACU LS 231101

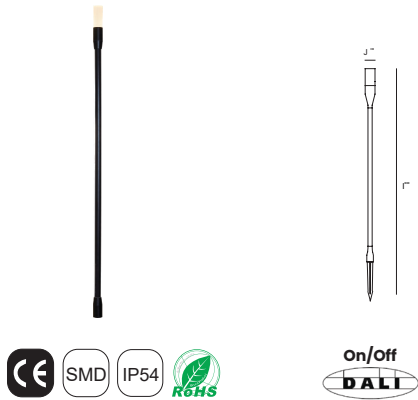

Wattage	Beam angle
1W	180°
Color Temperature	Lumen Output
3000k	Decorative
4000k	Lumen Effect
Installation	Rated Life Hours
Planted	30,000 - 50,000H
CRI	Colors
≥80	■ □ Black, white
Input Voltage	Materials
12V AC Via the Attached Driver	Aluminum + PC

