



Ponto Collection

Indoor Lighting

ACUMEN

www.acumenlight.com

PONTO COLLECTION


24V DC

Featuring a unified base, effortless installation, and a diverse range that blends general, accent, and decorative lighting Ponto stands out as the ultimate lighting solution.

Ponto Base

Trimless

ACU BS 240000T

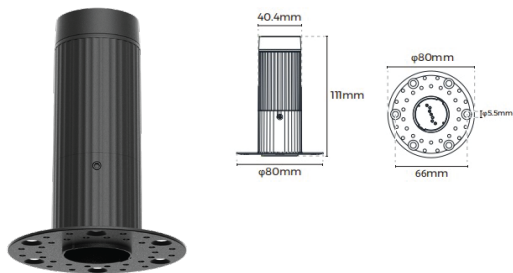


Wattage	Rated Current
Up to 72W	3A
Open Size	Input voltage
φ45mm	24V DC Rated
Installation	Maximum load
Trimless	8Kg
Warranty	Colors
5 years	■ Black
 	□ White

Ponto Base

Recessed

ACU BSC 240000R

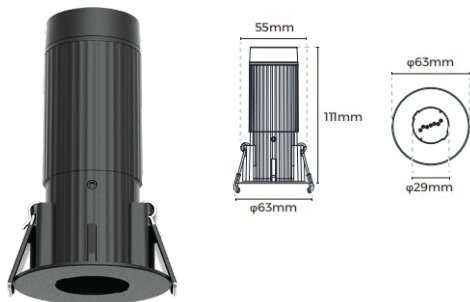

Wattage	Rated Current
Up to 72W	3A
Open Size	Input voltage
φ56mm	24V DC Rated
Installation	Maximum load
Recessed	1Kg
Warranty	Colors
5 years	■ Black
 	□ White

PONTO SPOT LIGHT

Fixed


ACU PS 241000



Wattage	Beam angle
3W	15° 25°
Color Temperature	Lumen Output
3000k	135Lm
4000k	172Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	
24V DC	


Adjustable

ACU PTS 241001

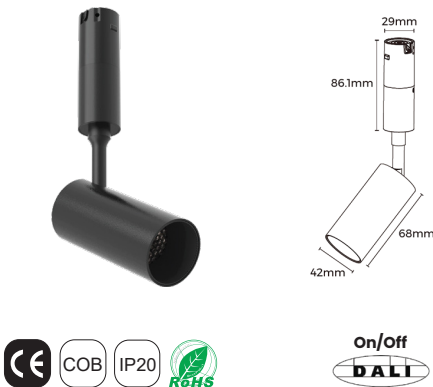

Wattage	Beam angle
6W	24° 36°
Color Temperature	Lumen Output
3000k	375Lm
4000k	500Lm , 400Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	
24V DC	

ACU PTS 241002



Wattage	Beam angle
14W	15° 24° 36°
Color Temperature	Lumen Output
3000k	1030Lm
4000k	1100Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	
24V DC	



PONTO ZOOMABLE LIGHT

ACU PTZ 241101



Wattage

5W

Beam angle

12°-50°

Color Temperature

3000k

Lumen Output

282Lm

Installation

On Recessed Base

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black

Input Voltage

24V DC

ACU PTZ 241102



Wattage

12W

Beam angle

15°-36°

Color Temperature

3000k

Lumen Output

660Lm

Installation

On Recessed Base

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black


Input Voltage

24V DC

PONTO LINEAR


ROUND TUBE LIGHT

ACU PTL 241201

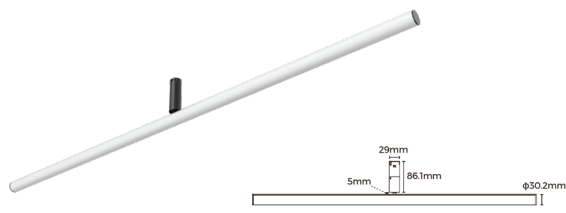

Wattage	Beam angle
12W	200° x 110°
Color Temperature	Lumen Output
3000k 4000k	1128Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Length
24V DC	604mm

ACU PTL 241202

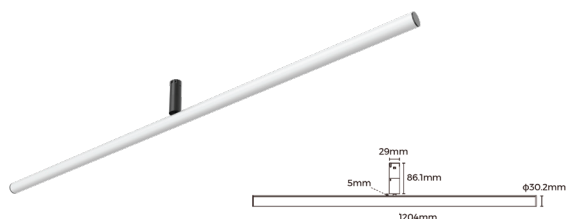


Wattage	Beam angle
24W	200° x 110°
Color Temperature	Lumen Output
3000k 4000k	2256Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR


Normal Diffuser

ACU PTL 241301

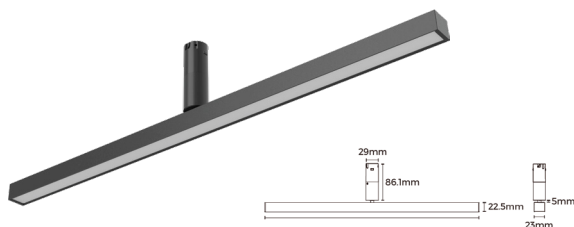

Wattage	Beam angle
12W	110°
Color Temperature	Lumen Output
3000k	840Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm

ACU PTL 241302

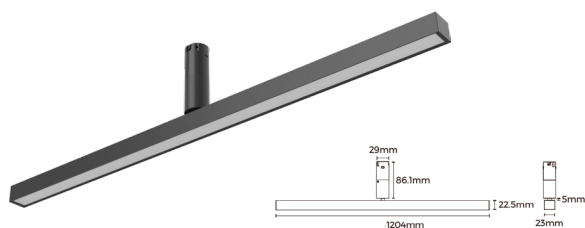


Wattage	Beam angle
24W	110°
Color Temperature	Lumen Output
3000k	1680Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR


Prismatic Diffuser

ACU PTL 241401

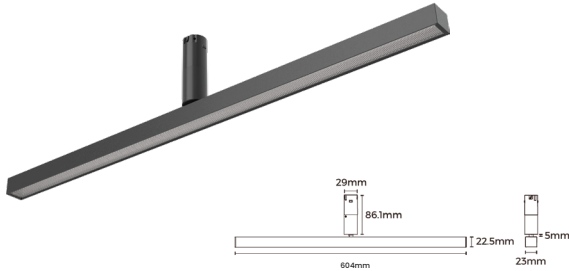

Wattage	Beam angle
12W	70°
Color Temperature	Lumen Output
3000k 4000k	900Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm

ACU PTL 241402

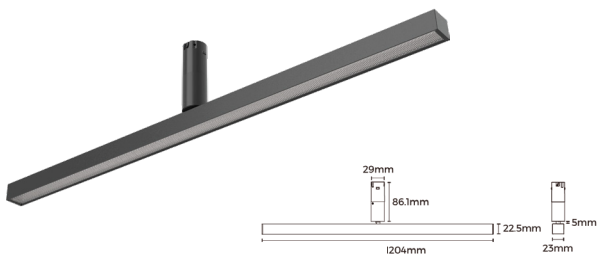


Wattage	Beam angle
24W	70°
Color Temperature	Lumen Output
3000k 4000k	1800Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR


Grating Diffuser

ACU PTL 241501

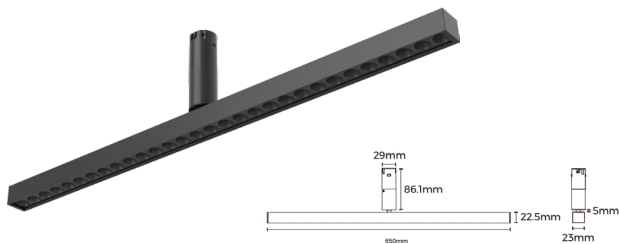

Wattage	Beam angle
13W	30°
Color Temperature	Lumen Output
3000k 4000k	858Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	650mm

ACU PTL 241502

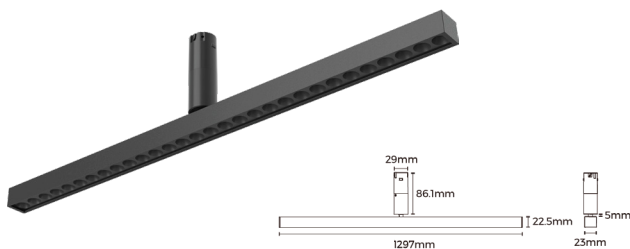


Wattage	Beam angle
26W	30°
Color Temperature	Lumen Output
3000k 4000k	1716Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1297mm

PONTO LINEAR


Asymmetric Diffuser

ACU PTL 241601

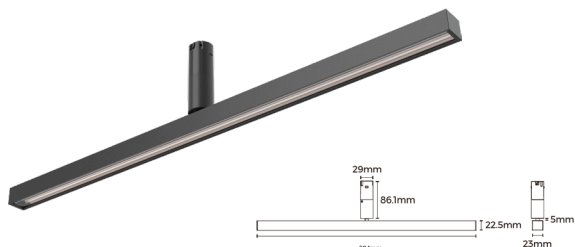

Wattage	Beam angle
12W	90° x 45° x 15°
Color Temperature	Lumen Output
3000k	1128Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm

ACU PTL 241602

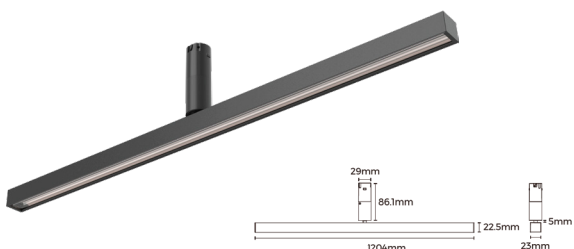


Wattage	Beam angle
24W	90° x 45° x 15°
Color Temperature	Lumen Output
3000k	2256Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm

PONTO LINEAR


Double Asymmetric Diffuser

ACU PTL 241701

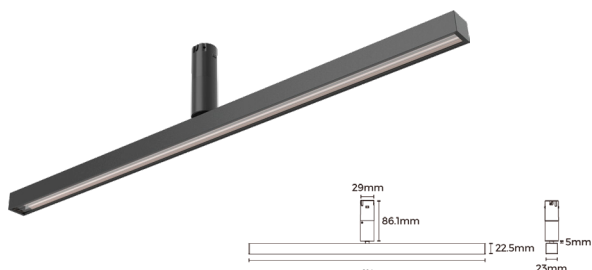

Wattage	Beam angle
12W	100° x 90° x 15°
Color Temperature	Lumen Output
3000k 4000k	1128Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	604mm

ACU PTL 241702

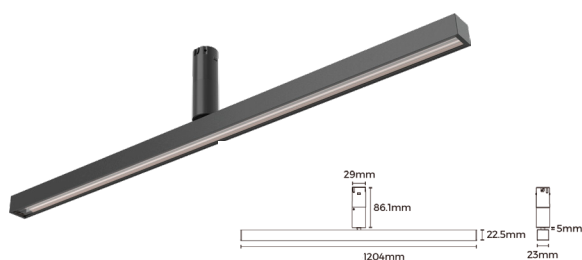


Wattage	Beam angle
24W	100° x 90° x 15°
Color Temperature	Lumen Output
3000k 4000k	2256Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1204mm



Up-Down


Ponto Linear Light

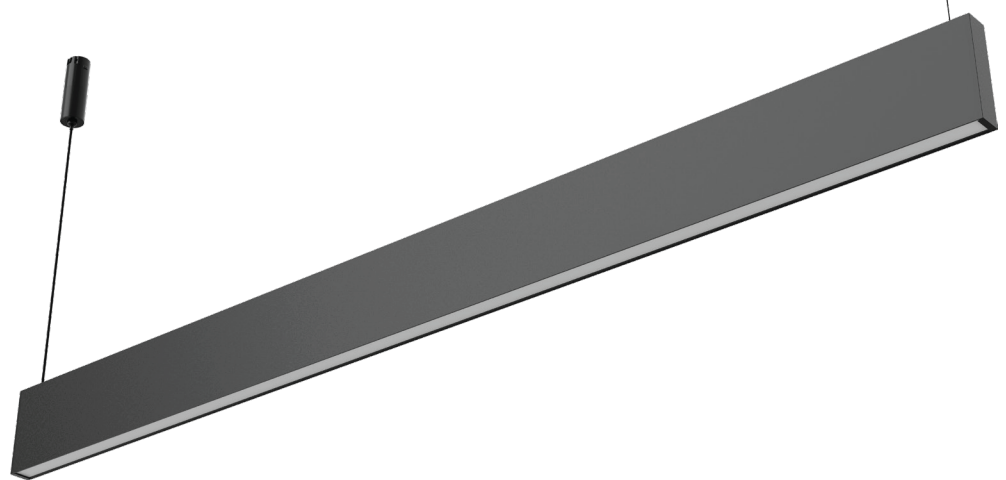

PONTO LINEAR

Normal Diffuser

ACU PTL 241801

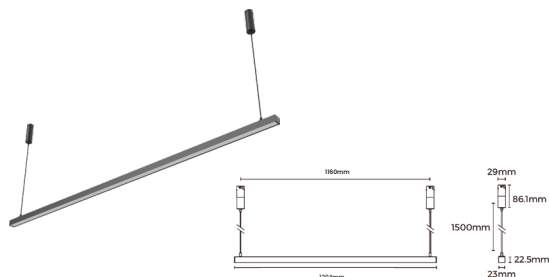

Wattage

24W

Beam angle

110°

Color Temperature

3000k

4000k

Lumen Output

1680Lm

Installation

On Recessed Base

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black

Input Voltage

24V DC


Length

1204mm

PONTO LINEAR

With Prismatic Diffuser

ACU PTL 241901

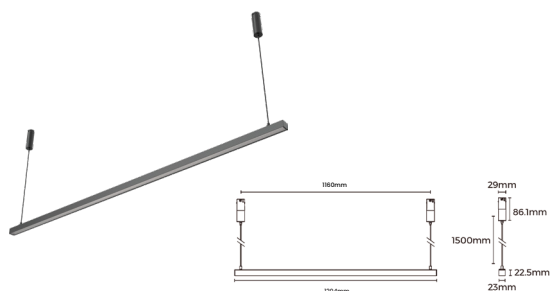

Wattage

24W

Beam angle

70°

Color Temperature

3000k

4000k

Lumen Output

1800Lm

Installation

On Recessed Base

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black

Input Voltage

24V DC


Length

1204mm

PONTO LINEAR

Grating Diffuser

ACU PTL 242001

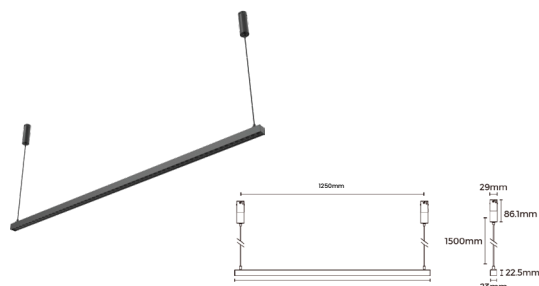

Wattage

26W

Beam angle

30°

Color Temperature

3000k

4000k

Lumen Output

1716Lm

Installation

On Recessed Base

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black

Input Voltage

24V DC


Length

1297mm

UP-DOWN PONTO LINEAR LIGHT

Normal Diffuser

ACU PTL 242101

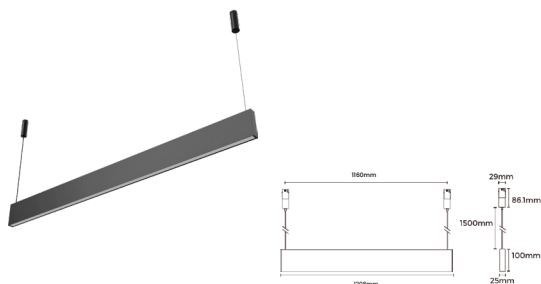

Wattage

48W

Beam angle

Up: 100° , Down: 100°

Color Temperature

3000k

4000k

Lumen Output

2688Lm

Installation

On Recessed Base

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black

Input Voltage

24V DC


Length

1208mm

UP-DOWN PONTO LINEAR LIGHT

Prismatic Diffuser

ACU PTL 242201

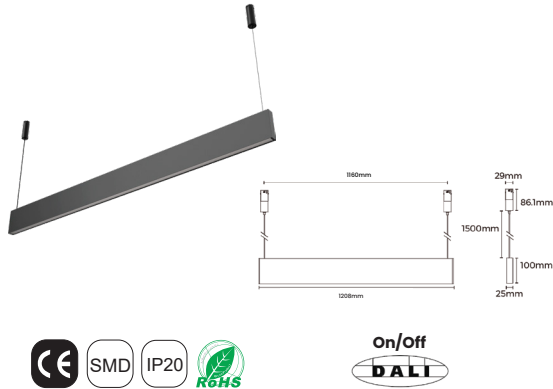


Wattage	Beam angle
48W	Up: 100° , Down: 100°
Color Temperature	Lumen Output
3000k 4000k	2784Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1208mm

UP-DOWN PONTO LINEAR LIGHT

Grating Diffuser


ACU PTL 242301

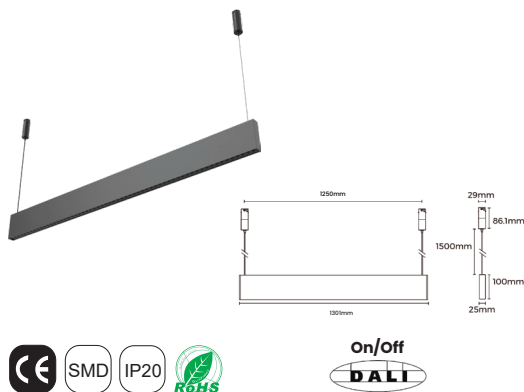

Wattage	Beam angle
53W	Up:100° , Down: 100°
Color Temperature	Lumen Output
3000k 4000k	2703Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	1301mm

PONTO WALL WASHER

ACU WW 242401

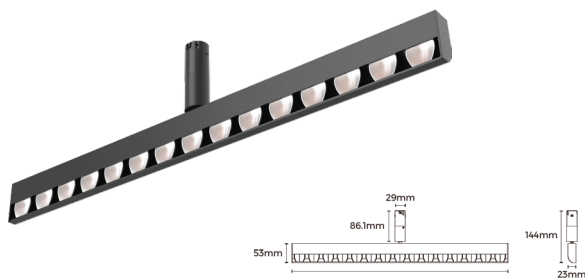

Wattage

10W

Beam angle

60° X 25° X 73°

Color Temperature

3000k

4000k

Lumen Output

846Lm

900Lm

Installation

On Recessed Base

Rated Life Hours

30,000 – 50,000H

CRI

≥90

Colors

■ Black


Input Voltage

24V DC

Length

604mm

ACU WW 242402

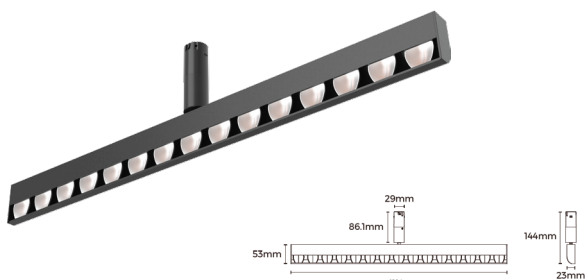

Wattage

20W

Beam angle

60° X 25° X 73°

Color Temperature

3000k

4000k

Lumen Output

1692Lm

1800Lm

Installation

On Recessed Base

Rated Life Hours

30,000 – 50,000H

CRI

≥90

Colors

■ Black

Input Voltage

24V DC

Length


1204mm



PONTO ROUND LIGHT


Neon Flex

ACU WW 242501

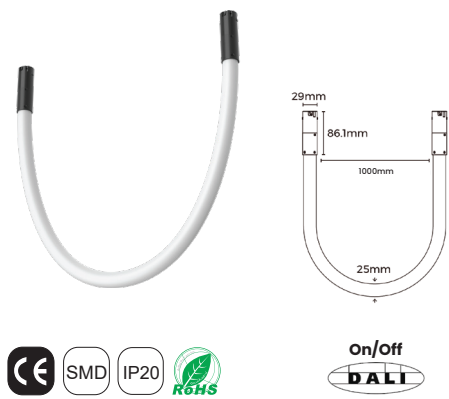

Wattage	Beam angle
14W	360°
Color Temperature	Lumen Output
3000k	920Lm
4000k	980Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Length
24V DC	1000mm

ACU WW 242502

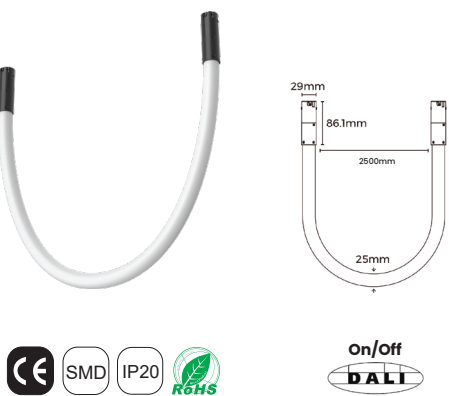


Wattage	Beam angle
35W	360°
Color Temperature	Lumen Output
3000k	2300Lm
4000k	2450Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Length
24V DC	2500mm


PONTO ROUND LIGHT

Neon Flex

ACU WW 242503

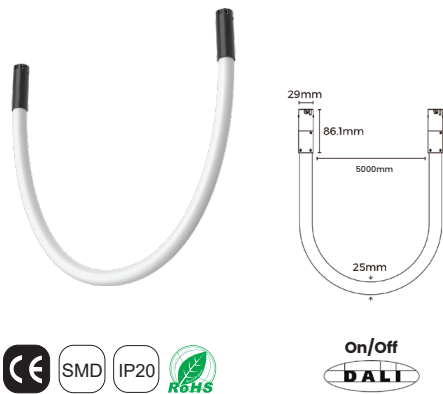


Wattage	Beam angle
70W	360°
Color Temperature	Lumen Output
3000k	4600Lm
4000k	4900Lm
Installation	Rated Life Hours
On Recessed Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Length
24V DC	5000mm

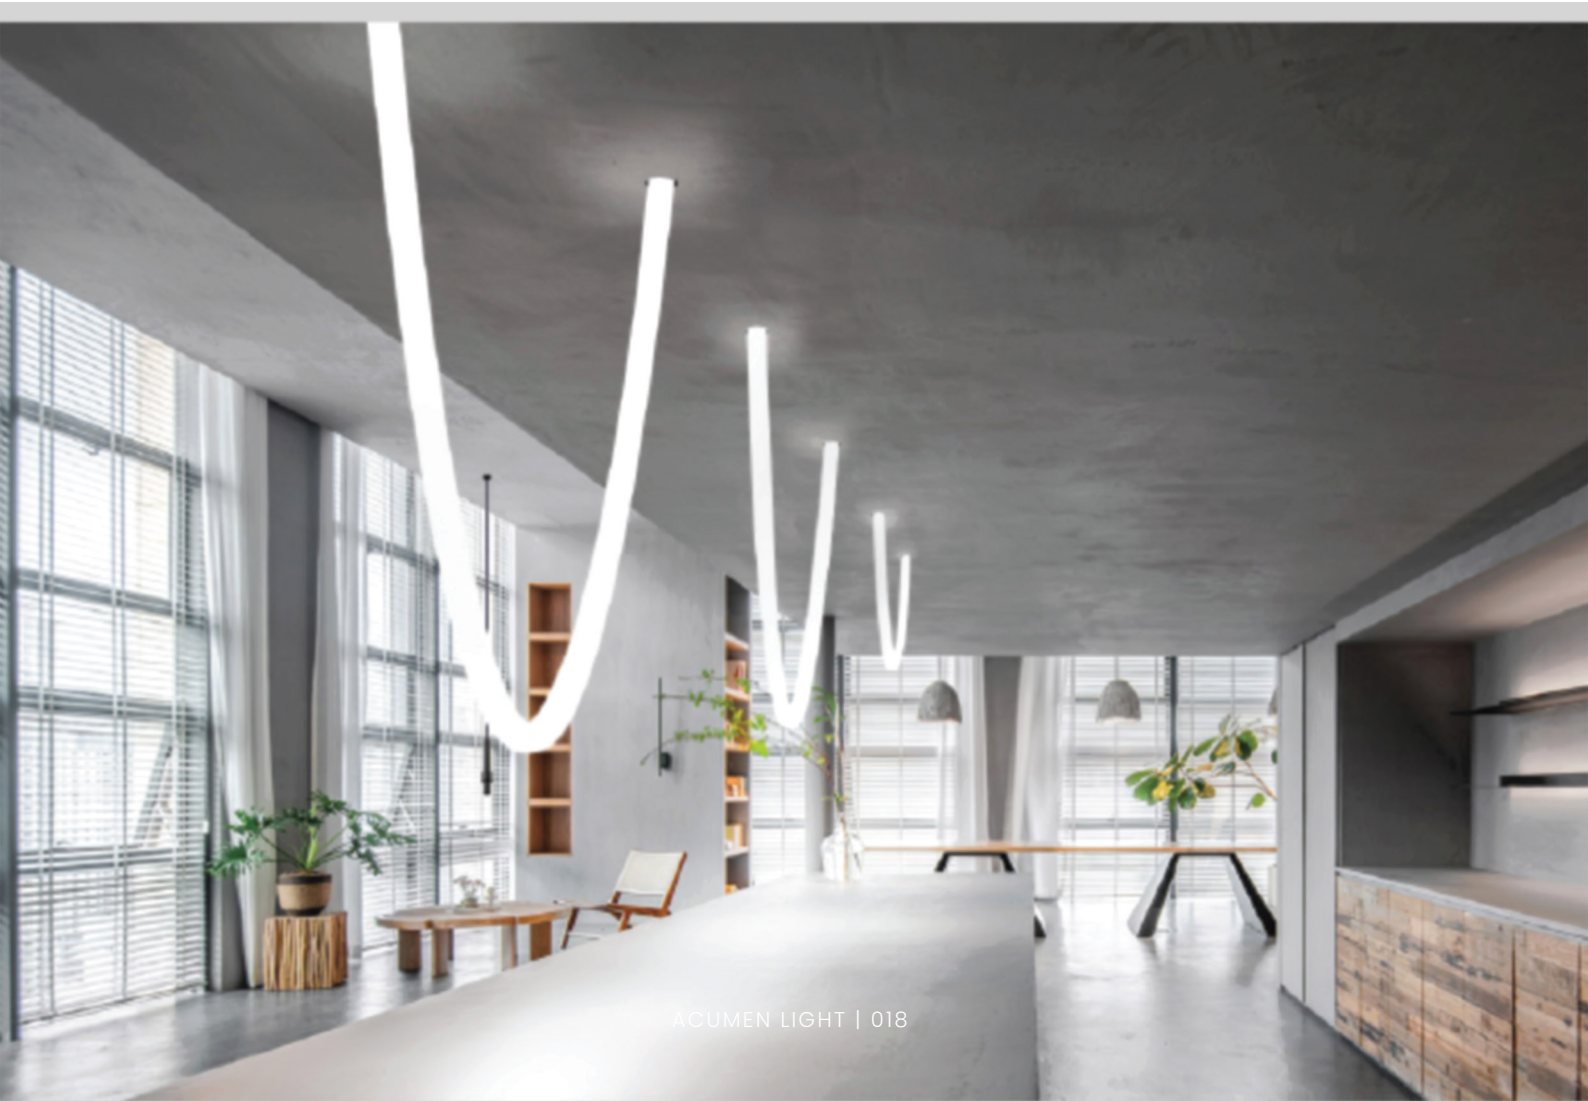

PONTO DECORATIVE

ACU PTD 242601

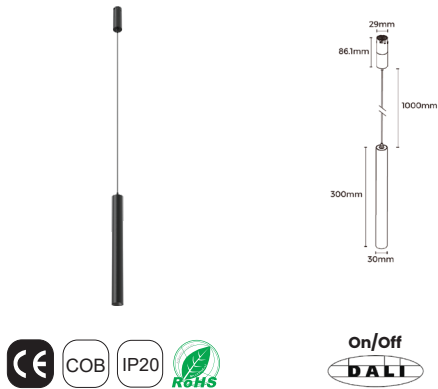

Wattage	Beam angle
6W	24°
Color Temperature	Lumen Output
3000k	370Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable

ACU PTD 242602




Wattage	Beam angle
6W	24°
Color Temperature	Lumen Output
3000k	370Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable



PONTO DECORATIVE

Neon Flex

ACU PTD 242603

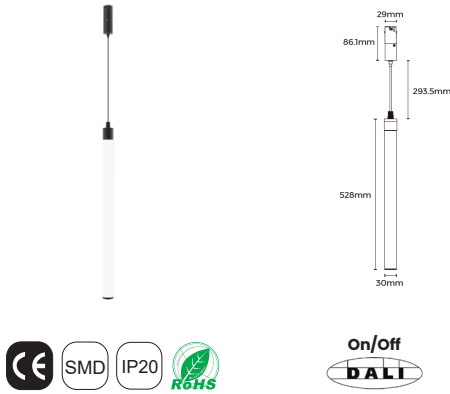

Wattage	Beam angle
7W	360°
Color Temperature	Lumen Output
3000k	460Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable

ACU PTD 242604



Wattage	Beam angle
6W	360°
Color Temperature	Lumen Output
3000k	560Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable



PONTO DECORATIVE

ACU PTD 242605



Wattage	Beam angle
4W	110°
Color Temperature	Lumen Output
3000k	340Lm
4000k	
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable

PONTO DECORATIVE

ACU PTD 242606



Wattage	Beam angle
3W	110°
Color Temperature	Lumen Output
1500k	170Lm
Installation	Rated Life Hours
On Recessed Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Length
24V DC	ADJ Cable



