



Pavo Collection

Indoor Lighting

ACUMEN

www.acumenlight.com



Pavo, This family is specialized in residential and hospitality applications because of its high efficiency, variety of beam angles, and wattages. The main character of this family is that it is adjustable, which supports the users in illuminating different surfaces from one source.

- DRIVERS ARE PROVIDED BY **TRIDONIC**

Pavo

Pavo Adjustable

ACU 200901



| Wattage | Beam angle |
|---------|------------|
|---------|------------|

| | |
|-------|-------------|
| 3x2 W | 12° 34° 48° |
|-------|-------------|

| Color Temperature | Lumen Output |
|-------------------|--------------|
|-------------------|--------------|

| | |
|-------|--------|
| 3000k | 450 Lm |
|-------|--------|

| Installation | Rated life hours |
|--------------|------------------|
|--------------|------------------|

| | |
|----------|--------------|
| Recessed | 30000-50000H |
|----------|--------------|

| CRI | Colors |
|-----|--------|
|-----|--------|

| | |
|-----|--------------------------------|
| ≥90 | <input type="checkbox"/> White |
|-----|--------------------------------|


| Input Voltage | Material |
|---------------|----------|
|---------------|----------|

| | |
|---|------------------------|
| 220V AC with the Attached Remote Driver | Powder Coated Aluminum |
|---|------------------------|

| Dimention | Cutting Section |
|-----------|-----------------|
|-----------|-----------------|

| | |
|--------------------------|--------------------|
| L 106 x W 60 x H 50.5 mm | CutOut L97 x W49mm |
|--------------------------|--------------------|

ACU 200902



| Wattage | Beam angle |
|---------|------------|
|---------|------------|

| | |
|-------|-----------------|
| 6x2 W | 12° 24° 34° 48° |
|-------|-----------------|

| Color Temperature | Lumen Output |
|-------------------|--------------|
|-------------------|--------------|

| | |
|-------|--------|
| 3000k | 900 Lm |
|-------|--------|

| Installation | Rated life hours |
|--------------|------------------|
|--------------|------------------|

| | |
|----------|--------------|
| Recessed | 30000-50000H |
|----------|--------------|

| CRI | Colors |
|-----|--------|
|-----|--------|

| | |
|-----|--|
| ≥90 | <input checked="" type="checkbox"/> Black <input type="checkbox"/> |
|-----|--|

| Input Voltage | Material |
|---------------|----------|
|---------------|----------|

| | |
|---|------------------------|
| 220V AC with the Attached Remote Driver | Powder Coated Aluminum |
|---|------------------------|


| Dimention | Cutting Section |
|-----------|-----------------|
|-----------|-----------------|

| | |
|---------------------------|--------------------|
| L 186.5 x W 60 x H 50.5mm | Cutout L180x W50mm |
|---------------------------|--------------------|

Pavo

Pavo Wall Washer

ACU 200903



| Wattage | Beam angle |
|---------|------------|
|---------|------------|

| | |
|-------|------|
| 5x2 W | 100° |
|-------|------|

| Color Temperature | Lumen Output |
|-------------------|--------------|
|-------------------|--------------|

| | |
|-------|--------|
| 3000k | 750 Lm |
|-------|--------|

| Installation | Rated life hours |
|--------------|------------------|
|--------------|------------------|

| | |
|----------|--------------|
| Recessed | 30000-50000H |
|----------|--------------|

| CRI | Colors |
|-----|--------|
|-----|--------|

| | |
|-----|-----------------|
| ≥90 | ■ Black □ White |
|-----|-----------------|


| Input Voltage | Material |
|---------------|----------|
|---------------|----------|

| | |
|---|------------------------|
| 220V AC with the Attached Remote Driver | Powder Coated Aluminum |
|---|------------------------|

| Dimension | Cutting Section |
|-----------|-----------------|
|-----------|-----------------|

| | |
|------------------------|---------------------|
| L 147 x W 45 x H 39 mm | CutOut L132 x W36mm |
|------------------------|---------------------|

ACU 200904



| Wattage | Beam angle |
|---------|------------|
|---------|------------|

| | |
|--------|------|
| 10x2 W | 100° |
|--------|------|

| Color Temperature | Lumen Output |
|-------------------|--------------|
|-------------------|--------------|

| | |
|-------|---------|
| 3000k | 1500 Lm |
|-------|---------|

| Installation | Rated life hours |
|--------------|------------------|
|--------------|------------------|

| | |
|----------|--------------|
| Recessed | 30000-50000H |
|----------|--------------|

| CRI | Colors |
|-----|--------|
|-----|--------|

| | |
|-----|-----------------|
| ≥90 | ■ Black □ White |
|-----|-----------------|

| Input Voltage | Material |
|---------------|----------|
|---------------|----------|

| | |
|---|------------------------|
| 220V AC with the Attached Remote Driver | Powder Coated Aluminum |
|---|------------------------|

| Dimension | Cutting Section |
|-----------|-----------------|
|-----------|-----------------|


| | |
|------------------------|---------------------|
| L 278 x W 46 x H 36 mm | CutOut L269 x W36mm |
|------------------------|---------------------|



Pavo

Pavo Wall Washer

ACU 200905

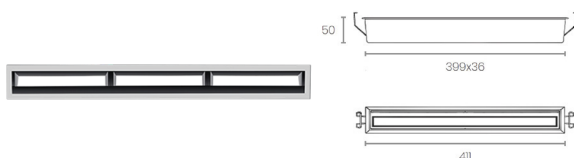


| Wattage | Beam angle |
|---|--------------------------------|
| 15x2 W | 100° |
| Color Temperature | Lumen Output |
| 3000k | 2250 Lm |
| Installation | Rated life hours |
| Recessed | 30000-50000H |
| CRI | Colors |
| ≥90 | <input type="checkbox"/> White |
| Input Voltage | Material |
| 220V AC with the Attached Remote Driver | Powder Coated Aluminum |
| Dimension | Cutting Section |
| L 411 x W 36 x H 50 mm | CutOut L399x W36 mm |

Pavo

Pavo DownLight

ACU S 18104

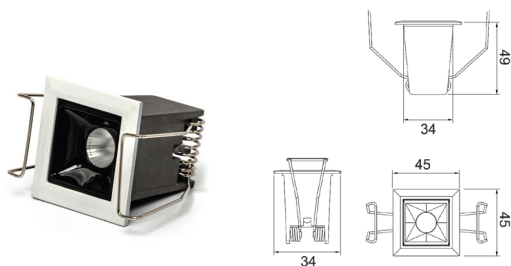


| Wattage | Beam angle |
|---|--------------------------------|
| 2 W | 12° 30° |
| Color Temperature | Lumen Output |
| 3000k | 185 Lm |
| Installation | Rated life hours |
| Recessed | 30000-50000H |
| CRI | Colors |
| ≥90 | <input type="checkbox"/> White |
| Input Voltage | Material |
| 220V AC with the Attached Remote Driver | Powder Coated Aluminum |
| Dimension | Cutting Section |
| L 45 x W 45 x H 49 mm | L34 x W34 mm |

Pavo

Pavo DownLight

ACU S 18105

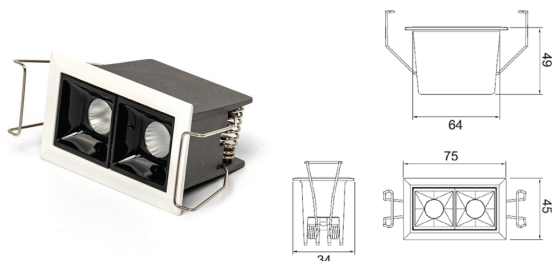

| Wattage | Beam angle |
|---------|------------|
|---------|------------|

| | |
|-------|---------|
| 2x2 W | 12° 30° |
|-------|---------|

| Color Temperature | Lumen Output |
|-------------------|--------------|
|-------------------|--------------|

| | |
|-------|--------|
| 3000k | 370 Lm |
|-------|--------|

| Installation | Rated life hours |
|--------------|------------------|
|--------------|------------------|

| | |
|----------|--------------|
| Recessed | 30000-50000H |
|----------|--------------|

| CRI | Colors |
|-----|--------|
|-----|--------|

| | |
|-----|-----------------|
| ≥90 | ■ Black □ White |
|-----|-----------------|

| Input Voltage | Material |
|---------------|----------|
|---------------|----------|

| | |
|---|------------------------|
| 220V AC with the Attached Remote Driver | Powder Coated Aluminum |
|---|------------------------|


| Dimention | Cutting Section |
|-----------|-----------------|
|-----------|-----------------|

| | |
|-----------------------|--------------------|
| L 75 x W 45 x H 49 mm | CutOut L68 x W37mm |
|-----------------------|--------------------|

Pavo

Pavo DownLight

ACU S 18106

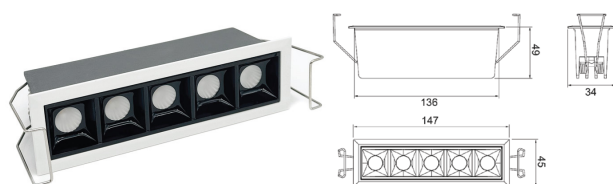

| Wattage | Beam angle |
|---------|------------|
|---------|------------|

| | |
|-------|---------|
| 5x2 W | 12° 30° |
|-------|---------|

| Color Temperature | Lumen Output |
|-------------------|--------------|
|-------------------|--------------|

| | |
|-------|--------|
| 3000k | 925 Lm |
|-------|--------|

| Installation | Rated life hours |
|--------------|------------------|
|--------------|------------------|

| | |
|----------|--------------|
| Recessed | 30000-50000H |
|----------|--------------|

| CRI | Colors |
|-----|--------|
|-----|--------|

| | |
|-----|-----------------|
| ≥90 | ■ Black □ White |
|-----|-----------------|

| Input Voltage | Material |
|---------------|----------|
|---------------|----------|

| | |
|---|------------------------|
| 220V AC with the Attached Remote Driver | Powder Coated Aluminum |
|---|------------------------|

| Dimention | Cutting Section |
|-----------|-----------------|
|-----------|-----------------|


| | |
|----------------------|--------------------|
| L 147x W 45x H 49 mm | CutOut L140x W37mm |
|----------------------|--------------------|



Pavo

Pavo DownLight

ACU S 18107

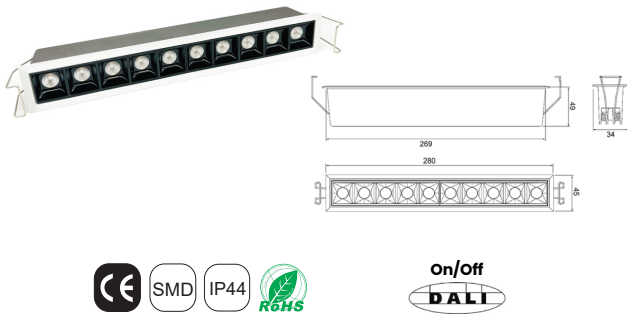


| | |
|---|-------------------------|
| Wattage | Beam angle |
| 10x2 W | 12° 30° |
| Color Temperature | Lumen Output |
| 3000k | 1850 Lm |
| Installation | Rated life hours |
| Recessed | 30000-50000H |
| CRI | Colors |
| ≥90 | ■ Black □ White |
| Input Voltage | Material |
| 220V AC with the Attached Remote Driver | Powder Coated Aluminum |
| Dimention | Cutting Section |
| L 280 x W 45 x H 49 mm | CutOut L273 x W37mm |

Pavo

Pavo DownLight

ACU S 18108

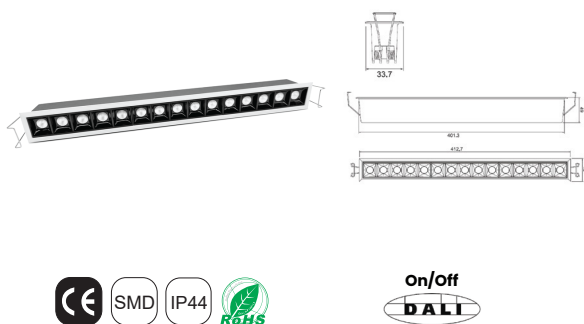

| | |
|---|-------------------------|
| Wattage | Beam angle |
| 15x2 W | 12° 30° |
| Color Temperature | Lumen Output |
| 3000k | 2775 Lm |
| Installation | Rated life hours |
| Recessed | 30000-50000H |
| CRI | Colors |
| ≥90 | □ White |
| Input Voltage | Material |
| 220V AC with the Attached Remote Driver | Powder Coated Aluminum |
| Dimention | Cutting Section |
| L 412.7 x W 45 x H 49 mm | L401.3 x W33.7 mm |

