



NERO COLLECTION


Nero Black Hole

This lighting solution is engineered to precisely focus light and distribute it evenly, ensuring both functional and aesthetic illumination. Featuring a small aperture design combined with cross-lighting technology, it minimizes direct glare while enhancing ambient brightness. The fixture delivers low glare performance and boasts high luminous efficiency, reaching up to 70%, making it an ideal choice for energy-efficient and visually comfortable lighting applications.

Nero FLAT



ACU FS 251101



| | |
|---|---------------------------|
| Wattage | Beam angle |
| 5W | 15° 36° |
| Color Temperature | Lumen Output |
| 3000k | 300Lm |
| Installation | Rated Life Hours |
| Recessed | 30,000 - 50,000H |
| CRI | Colors |
| ≥90 | ■ Black □ White |
| Input Voltage | Materials |
| 220V AC (Via the Attached Remote Driver) | Powder Coated Aluminum |
| Cutting Section | |
| Cut Out: Ø35mm | |

Flat Shape Frame

Nero Collection

ACU FS 251102



| | |
|---|-------------------------|
| Wattage | Beam angle |
| 10W | 15° 36° |
| Color Temperature | Lumen Output |
| 3000K | 600Lm |
| Installation | Rated Life Hours |
| Recessed | 30,000 - 50,000H |
| CRI | Colors |
| ≥90 | ■ Black □ White |
| Input Voltage | Materials |
| 220V AC (Via the Attached Remote Driver) | Powder Coated Aluminum |
| Cutting Section | |
| Cut Out: Ø65mm | |

ACU FS 251103



| | |
|---|-------------------------|
| Wattage | Beam angle |
| 15W | 15° 36° |
| Color Temperature | Lumen Output |
| 3000k | 900Lm |
| Installation | Rated Life Hours |
| Recessed | 30,000 - 50,000H |
| CRI | Colors |
| ≥90 | ■ Black □ White |
| Input Voltage | Materials |
| 220V AC (Via the Attached Remote Driver) | Powder Coated Aluminum |
| Cutting Section | |
| Cut Out: Ø75mm | |






Nero **CURVED**

Adjustable Curved Shape Frame

Nero Collection

ACU CS 251000

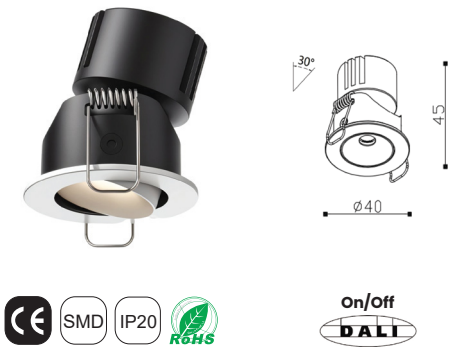

| Wattage | Beam angle |
|---|------------------------|
| 5W | 20° 40° |
| Color Temperature | Lumen Output |
| 3000K | 172Lm |
| Installation | Rated Life Hours |
| Recessed | 30,000 - 50,000H |
| CRI | Colors |
| ≥95 | ■ Black □ White |
| Input Voltage | Materials |
| 220V AC (Via the Attached Remote Driver) | Powder Coated Aluminum |
| Cutting Section | |
| Cut Out: Ø35mm | |

ACU CS 251001



| Wattage | Beam angle |
|---|------------------------|
| 5W | 15° 36° |
| Color Temperature | Lumen Output |
| 3000k | 300Lm |
| Installation | Rated Life Hours |
| Recessed | 30,000 - 50,000H |
| CRI | Colors |
| ≥90 | ■ Black □ White |
| Input Voltage | Materials |
| 220V AC (Via the Attached Remote Driver) | Powder Coated Aluminum |
| Cutting Section | |
| Cut Out: Ø35mm | |

Adjustable Curved Shape Frame

Nero Collection

ACU CS 251002



| Wattage | Beam angle |
|---|------------------------|
| 10W | 15° 36° |
| Color Temperature | Lumen Output |
| 3000K | 600Lm |
| Installation | Rated Life Hours |
| Recessed | 30,000 - 50,000H |
| CRI | Colors |
| ≥90 | ■ Black □ White |
| Input Voltage | Materials |
| 220V AC (Via the Attached Remote Driver) | Powder Coated Aluminum |
| Cutting Section | |
| Cut Out: Ø65mm | |

ACU CS 251003




| Wattage | Beam angle |
|---|------------------------|
| 15W | 15° 36° |
| Color Temperature | Lumen Output |
| 3000k | 900Lm |
| Installation | Rated Life Hours |
| Recessed | 30,000 - 50,000H |
| CRI | Colors |
| ≥90 | ■ Black □ White |
| Input Voltage | Materials |
| 220V AC (Via the Attached Remote Driver) | Powder Coated Aluminum |
| Cutting Section | |
| Cut Out: Ø75mm | |



Nero TRIMLESS

ACU TS 251201




| | |
|---|---------------------------|
| Wattage | Beam angle |
| 5W | 15° 36° |
| Color Temperature | Lumen Output |
| 3000K | 350Lm |
| Installation | Rated Life Hours |
| Recessed | 30,000 - 50,000H |
| CRI | Colors |
| ≥90 | ■ Black □ White |
| Input Voltage | Materials |
| 220V AC (Via the Attached Remote Driver) | Powder Coated Aluminum |
| Cutting Section | |
| Cut Out: Ø35mm | |

Nero Trimless Frame

Nero Collection

ACU TS 251202



| Wattage | Beam angle |
|---|------------------------|
| 10W | 15° 36° |
| Color Temperature | Lumen Output |
| 3000k | 700Lm |
| Installation | Rated Life Hours |
| Recessed | 30,000 - 50,000H |
| CRI | Colors |
| ≥90 | ■ Black □ White |
| Input Voltage | Materials |
| 220V AC (Via the Attached Remote Driver) | Powder Coated Aluminum |
| Cutting Section | |
| Cut Out: Ø45mm | |

ACU TS 251203




| Wattage | Beam angle |
|---|------------------------|
| 15W | 15° 36° |
| Color Temperature | Lumen Output |
| 3000K | 1050Lm |
| Installation | Rated Life Hours |
| Recessed | 30,000 - 50,000H |
| CRI | Colors |
| ≥90 | ■ Black □ White |
| Input Voltage | Materials |
| 220V AC (Via the Attached Remote Driver) | Powder Coated Aluminum |
| Cutting Section | |
| Cut Out: Ø45mm | |



Nero WALL WASHER



ACU WW 251301



| | |
|---|-------------------------|
| Wattage | Beam angle |
| 3.7W | 20° 38° |
| Color Temperature | Lumen Output |
| 3000K | 120Lm |
| Installation | Rated Life Hours |
| Recessed | 30,000 – 50,000H |
| CRI | Colors |
| ≥95 | ■ Black □ White |
| Input Voltage | Materials |
| 220V AC (Via the Attached Remote Driver) | Powder Coated Aluminum |
| Cutting Section | |
| Cut Out: Ø35 mm | |

