

INDOOR LIGHTING

ACUMEN LIGHT

Welcome to

ACUMEN LIGHT'S Indoor Lighting Catalogue

ACUMEN

ACUMEN LIGHT

Acumen Light was founded on the belief that light is more than a technical element. It shapes how a space is experienced, felt, and remembered. The right light is not always the brightest light. It is the light that understands the space.

It highlights what deserves attention, softens what should remain calm, guides movement, creates comfort, and gives every detail its presence. It can make a material feel warmer, an artwork come alive, a façade speak at night, or a room feel completely different from morning to evening.

INDOOR LIGHTING




The Indoor Collection is designed to respond to the different layers of interior lighting from visual comfort and functionality to atmosphere, focus, and architectural expression.

It brings together a wide range of indoor lighting solutions with diverse light effects, including downlights, spotlights, wall washers, wall grazers, linear lights, accent lights, and decorative lighting. With flexible installation options such as recessed, surface-mounted, suspended, and track systems, the collection allows each fixture to be selected according to the site condition, ceiling detail, design requirement, and intended lighting effect. More than a product range, the Indoor Collection is a toolkit for designers.

DOWNLIGHT & SPOTLIGHT

A refined collection of fixed and adjustable spotlights and downlights, offered in a wide range of shapes and models, to harmonize seamlessly with diverse spaces and applications. Defined by elegant aesthetics and precise beam control, these lighting solutions enhance architectural details, support design vision, and elevate the overall character of the space.

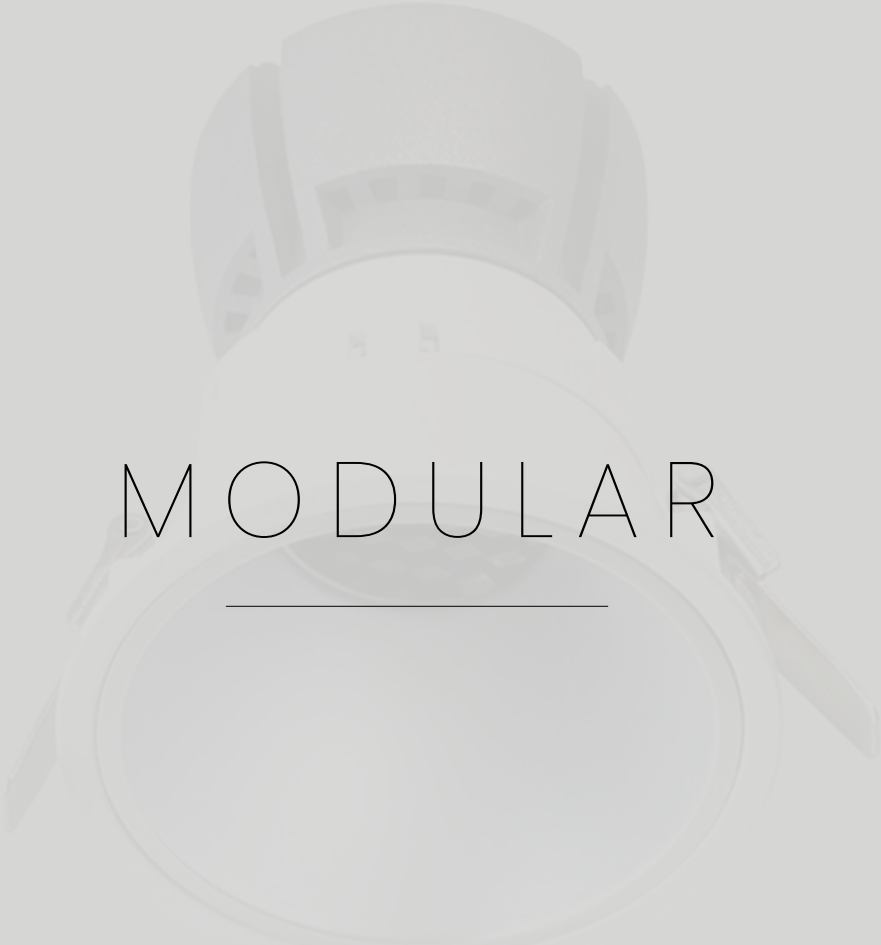

MODULAR


DRIVERS ARE PROVIDED BY **TRIDONIC**

Modular is a recessed LED fixture family designed to serve as ambient, task, or accent lighting. It offers multiple beam angles, frame types, and options, with anti-glare accessories and dimming options to support a more comfortable atmosphere.

Modular


Adjustable -Downlight & Spotlight - Recessed

ACU 01703-09



Wattage	Beam Angle
9W	10°
Colors Temperature	Lumen Output
3000k	750 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	Depending on the frame
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 01703-15




Wattage	Beam Angle
15W	10°
Colors Temperature	Lumen Output
3000k	1100 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	Depending on the frame
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Modular


Adjustable -Downlight & Spotlight - Recessed

ACU 01704-09



Wattage	Beam Angle
9W	15° 25° 40° 60°
Colors Temperature	Lumen Output
3000k	750 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	Depending on the frame
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 01704-15




Wattage	Beam Angle
15W	15° 25° 40° 60°
Colors Temperature	Lumen Output
3000k	1100 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	Depending on the frame
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





THE FRAMES

Stella Adjustable, Hydra Collection, Lynx, Cursa & Solna

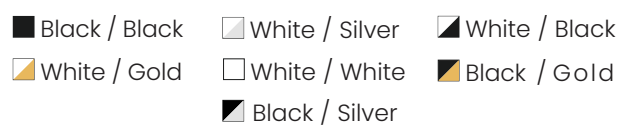


All these product frames come in multiple Colors options to match different styles & preferences!

Modular Frames

Colors & Features


ACU 10002 ADJ

Stella Adj



ACU 10005R


Hydra



ACU 10005RW


Hydra

Wall Washer



ACU 10005S



Hydra-Square



ACU 10005SW


Hydra-Square

Wall Washer



ACU 10006R

Lynx




Modular Frames

Colors & Features

ACU 10006RW

Lynx

Wall Washer





ø72mm

ACU 300029


Solna

Timeless



ACU 10007DS

Cursa



△ 154 x 152 mm




LEO-IP

Leo IP is a recessed spotlight family with powder-coated housing and strong heat-sink capability to reduce luminous degradation. Specifically recommended for wet applications such as washrooms.

Leo IP


Fixed – Downlight & Spotlight – Recessed

ACU S 17009



Wattage	Beam Angle
8W	24° 40° 60°
Colors Temperature	Lumen Output
3000k	675 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum

ACU S 17010



Wattage	Beam Angle
15W	15° 24° 38° 60°
Colors Temperature	Lumen Output
3000k	1125 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Leo IP

Adjustable – Downlight & Spotlight – Recessed

ACU S 17010 ADJ

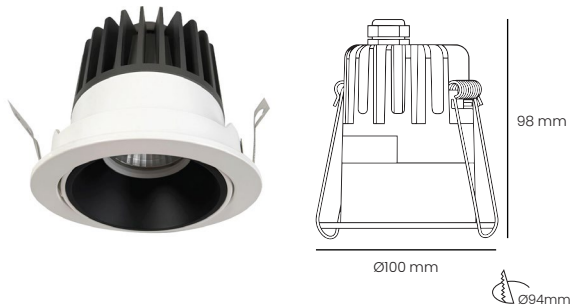

Wattage	Beam Angle
15W	15° 24° 38° 60°
Colors Temperature	Lumen Output
3000k	1125 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Leo IP Mini

Mini Fixed – Spotlight – Recessed

ACU S 17010MR



Wattage	Beam Angle
1.5W	10°
Colors Temperature	Lumen Output
3000k	90 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





Nero is a low-glare collection designed to deliver precise, evenly distributed illumination with strong visual comfort. Its small-aperture concept helps improve ambient brightness while maintaining a refined architectural appearance.


NERO FLAT



Nero Flat

Fixed - Downlight & Spotlight - Recessed

ACU FS 251101



Wattage	Beam Angle
5W	15° 36°
Colors Temperature	Lumen Output
3000k	300 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Nero Flat

Fixed – Downlight & Spotlight – Recessed

ACU FS 251102



Wattage	Beam Angle
10W	15° 36°
Colors Temperature	Lumen Output
3000k	600 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU FS 251103



Wattage	Beam Angle
15W	15° 36°
Colors Temperature	Lumen Output
3000k	915 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






NERO CURVED



Nero Curved

Adjustable - Fixed - Downlight & Spotlight - Recessed

ACU CS 251000




Wattage	Beam Angle
5W	25° 40°
Colors Temperature	Lumen Output
3000k	172 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥95	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Nero Curved

Fixed - Downlight & Spotlight - Recessed

ACU CS 251001



Wattage	Beam Angle
5W	15° 36°
Colors Temperature	Lumen Output
3000k	300 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Nero Curved

Fixed – Downlight & Spotlight – Recessed

ACU CS 251002



Wattage	Beam Angle
10W	15° 36°
Colors Temperature	Lumen Output
3000k	600 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU CS 251003



Wattage	Beam Angle
15W	15° 36°
Colors Temperature	Lumen Output
3000k	900 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum






NERO TRIMLESS

Nero Trimless

Fixed - Downlight & Spotlight - Recessed

ACU TS 251201



Wattage	Beam Angle
5W	15° 36°
Colors Temperature	Lumen Output
3000k	350 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Nero Trimless

Fixed – Downlight & Spotlight – Recessed

ACU TS 251202



Wattage	Beam Angle
10W	15° 36°
Colors Temperature	Lumen Output
3000k	700 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥95	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU TS 251203



Wattage	Beam Angle
15W	15° 36°
Colors Temperature	Lumen Output
3000k	1050 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






NERO WALL WASHER




Nero

Adjustable - Wall Washer - Recessed

ACU WW 251301



Wattage	Beam Angle
5W	20° 38°
Colors Temperature	Lumen Output
3000k	120 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥95	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

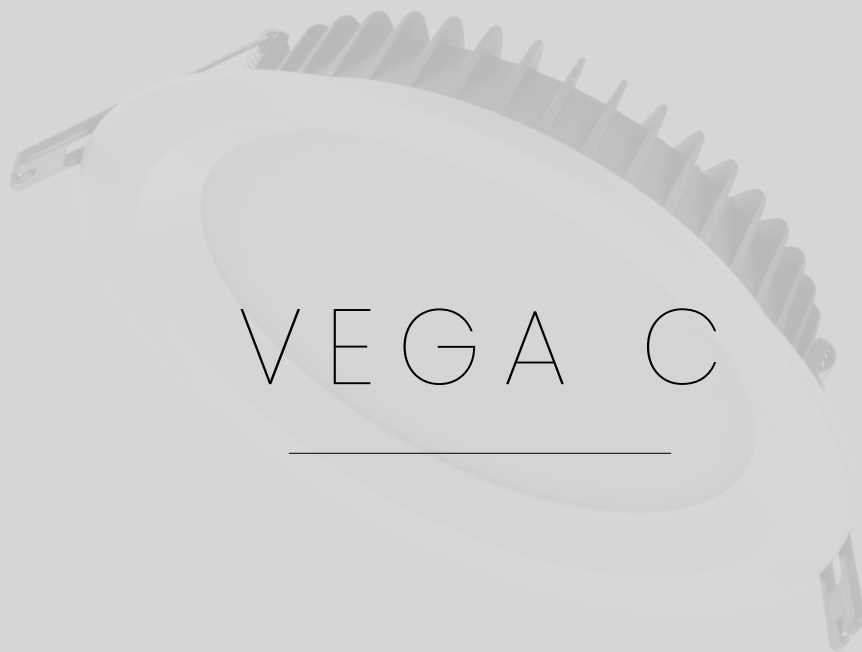

VEGA C


DRIVERS ARE PROVIDED BY **TRIDONIC**

Vega C is an ultra-thin recessed downlight designed to be practical, simple, and easy to install. The catalogue highlights its anti-glare system and frosted acrylic diffuser for visual comfort and strong light transmittance.

Vega C


Fixed - Downlight - Recessed

ACU D 20060

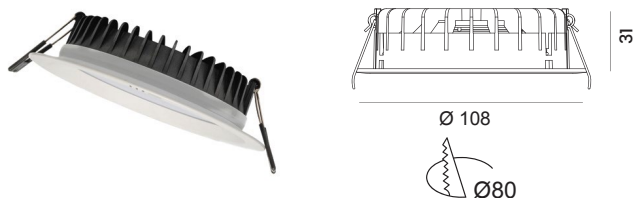

Wattage	Beam Angle
5W	100°
Colors Temperature	Lumen Output
3000k	380 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU D 20061

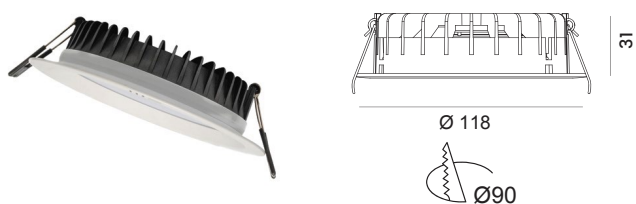


Wattage	Beam Angle
7W	100°
Colors Temperature	Lumen Output
3000k	550 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Vega C


Fixed - Downlight - Recessed

ACU D 20062



Wattage	Beam Angle
9W	100°
Colors Temperature	Lumen Output
3000k	720 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU D 20063



Wattage	Beam Angle
12W	100°
Colors Temperature	Lumen Output
3000k	960 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Vega C


Fixed - Downlight - Recessed

ACU D 20064



Wattage	Beam Angle
15W	100°
Colors Temperature	Lumen Output
3000k	1200 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU D 20065




Wattage	Beam Angle
20W	100°
Colors Temperature	Lumen Output
3000k	1600 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Vega C


Fixed - Downlight - Recessed

ACU D 20066



Wattage	Beam Angle
25W	100°
Colors Temperature	Lumen Output
3000k	2000 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU D 20067



Wattage	Beam Angle
30W	100°
Colors Temperature	Lumen Output
3000k	2400 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






DRIVERS ARE PROVIDED BY **TRIDONIC**

Mega is a recessed downlight family in the stronger-output tier of the simple anti-glare downlight category, designed for powerful and clean general illumination.

Mega


Fixed - Downlight - Recessed

ACU DR 240001



Wattage	Beam Angle
15W	85°
Colors Temperature	Lumen Output
3000K	1423 LM
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached External Driver)	Powder Coated Aluminum

ACU DR 240002



Wattage	Beam Angle
33W	85°
Colors Temperature	Lumen Output
3000K	3532 LM
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached External Driver)	Powder Coated Aluminum






Mega


Fixed – Downlight – Surface Mounted

ACU DSM 240003



Wattage	Beam Angle
8W	80°
Colors Temperature	Lumen Output
3000K	635 LM
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	☒ BW ☒ WG ☐ WS
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU DSM 240004




Wattage	Beam Angle
15W	80°
Colors Temperature	Lumen Output
3000K	1139 LM
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	☒ BW ☒ WG ☐ WS
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Mega


Fixed – Downlight – Surface Mounted

ACU DSM 240005



Wattage	Beam Angle
30W	110°
Colors Temperature	Lumen Output
3000K	2746 LM
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	☒ BW ☒ WG ☐ WS
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU DSM 240006



Wattage	Beam Angle
120W	110°
Colors Temperature	Lumen Output
3000K	11781 LM
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	☒ BW ☒ WG ☐ WS
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum







PAVO



DRIVERS ARE PROVIDED BY **TRIDONIC**

Pavo is positioned as a family specialized for residential and hospitality applications, with high efficiency, multiple beam angles, and several wattage options. The catalogue highlights adjustability as the family's main character, supporting the illumination of different surfaces from one source.

Pavo



Adjustable - Accent Light - Recessed

ACU 200901



Wattage	Beam Angle
3x2 W	12° 34° 48°
Colors Temperature	Lumen Output
3000k	450 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 200902




Wattage	Beam Angle
6x2 W	12° 34° 48°
Colors Temperature	Lumen Output
3000k	900 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Pavo


Fixed -Wall Washer - Recessed

ACU 200903



Wattage	Beam Angle
5x2 W	100°
Colors Temperature	Lumen Output
3000k	750 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 200904



Wattage	Beam Angle
10x2 W	100°
Colors Temperature	Lumen Output
3000k	1500 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Pavo

Fixed -Wall Washer - Recessed

ACU 200905




Wattage	Beam Angle
15x2 W	100°
Colors Temperature	Lumen Output
3000k	2250 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Pavo

Fixed - Downlight & Spotlight - Recessed

ACU S 18104




Wattage	Beam Angle
2 W	12° 30°
Colors Temperature	Lumen Output
3000k	185 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Pavo


Fixed - Downlight & Spotlight - Recessed

ACU S 18105



Wattage	Beam Angle
2x2 W	12° 30°
Colors Temperature	Lumen Output
3000k	370 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU S 18106



Wattage	Beam Angle
5x2 W	12° 30°
Colors Temperature	Lumen Output
3000k	855 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Pavo


Fixed - Downlight & Spotlight - Recessed

ACU S 18107

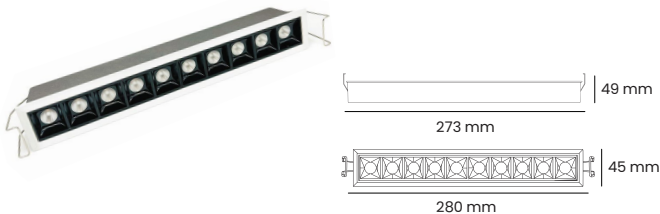

Wattage	Beam Angle
10x2 W	12° 30°
Colors Temperature	Lumen Output
3000k	1600 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU S 18108

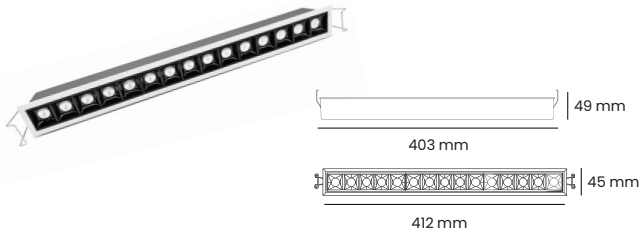

Wattage	Beam Angle
15x2 W	12° 30°
Colors Temperature	Lumen Output
3000k	2400 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





MENSA PLUS


COLLECTION

Mensa Plus is a spotlight family organized across recessed, surface-mounted, and track-mounted executions. The locked structure shows it as a system of focused lighting options built around spotlight performance and mounting flexibility.

Mensa Plus

Rotatable & Adjustable - Downlight & Spotlight - Recessed

ACU RL 245010

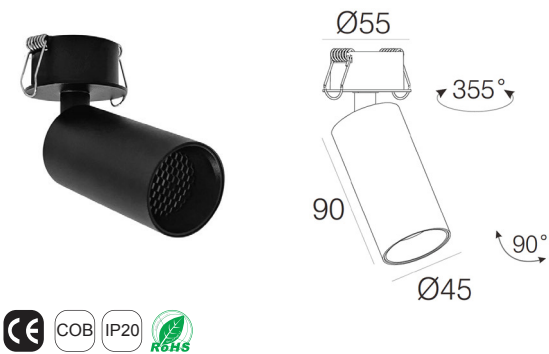

Wattage	Beam Angle
7W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	531 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU RL 245011




Wattage	Beam Angle
15W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1272 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Mensa Plus

Rotatable & Adjustable - Downlight & Spotlight - Recessed

ACU RL 245012



Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2117 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (via the External Attached Driver)	Powder Coated Aluminum






Mensa Plus


Rotatable & Adjustable – Downlight & Spotlight – Surface Mounted

ACU SML 245510

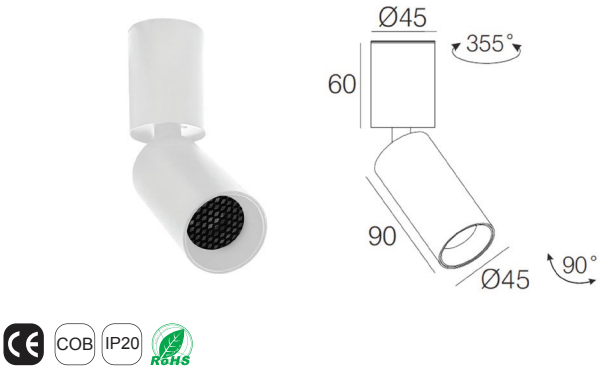

Wattage	Beam Angle
7W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	531 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU SML 245511

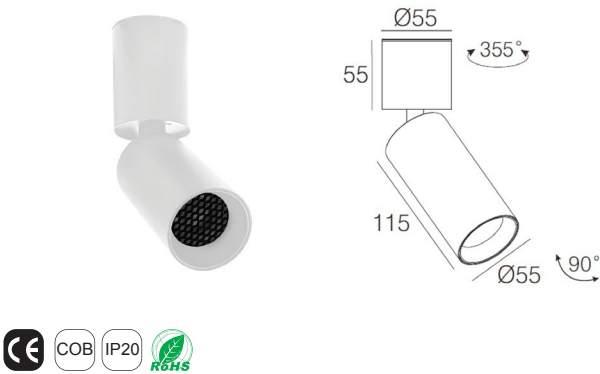


Wattage	Beam Angle
15W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1272 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Mensa Plus

Rotatable & Adjustable – Downlight & Spotlight – Surface Mounted

ACU SML 245512




Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2117 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Mensa Plus


Rotatable & Adjustable – Spotlight & Downlight – Track Mounted

ACU TL 244010



Wattage	Beam Angle
7W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	531 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU TL 244011




Wattage	Beam Angle
15W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1272 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Mensa Plus

Rotatable & Adjustable – Spotlight & Downlight – Track Mounted

ACU TL 244012



Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2117 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum





BIANCA


C O L L E C T I O N

Bianca is a spotlight family designed for refined accent lighting that highlights art, textures, and architectural details. It combines a decorative sensibility with focused technical performance.

Bianca

Rotatable & Adjustable – Spotlight & Downlight – Surface Mounted

ACU 200101

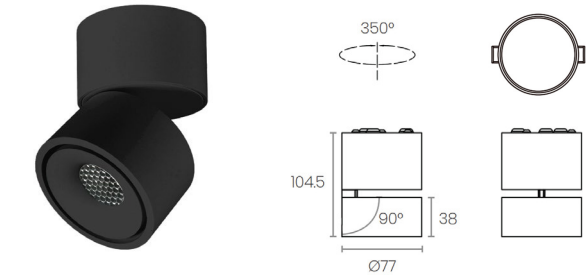


Wattage	Beam Angle
13W	12° 25° 38°
Colors Temperature	Lumen Output
3000k	1079 Lm
Installation	Rated Life Hours
Surface mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Bianca

Rotatable & Adjustable – Spotlight & Downlight – Recessed

ACU 200102

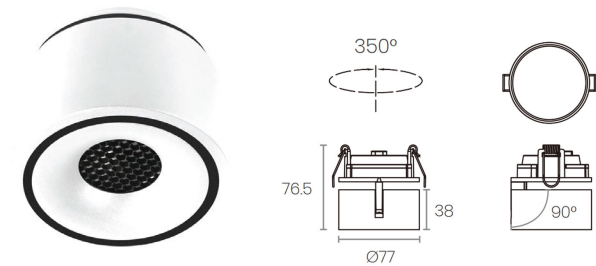

Wattage	Beam Angle
13W	12° 25° 38°
Colors Temperature	Lumen Output
3000k	1079 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum







PULSAR


Mini Spotlight

Pulsar is a mini spotlight family intended for discreet but powerful accent lighting. The catalogue positions it as suitable for enhancing textures, artworks, and architectural features with subtle sophistication.

Pulsar


Rotatable & Adjustable – Spotlight – Recessed

ACU MS 264010



Wattage	Beam Angle
1x3 W	15° 24°
Colors Temperature	Lumen Output
3000k	143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU MS 264011

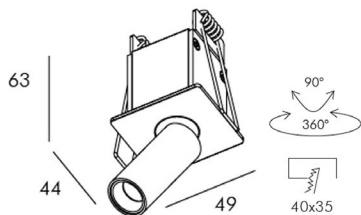

Wattage	Beam Angle
1x3 W	15° 24°
Colors Temperature	Lumen Output
3000k	143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Pulsar

Rotatable & Adjustable – Spotlight – Recessed

ACU MS 264012

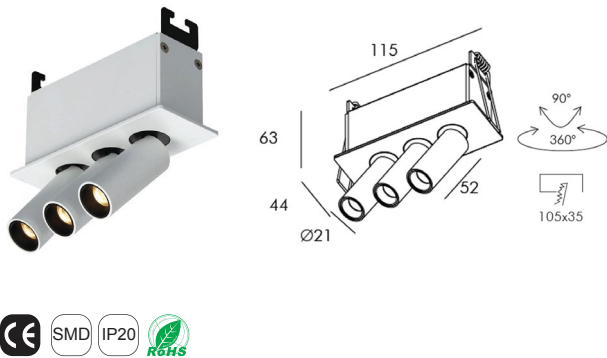

Wattage	Beam Angle
3x2 W	15° 24°
Colors Temperature	Lumen Output
3000k	413 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



PEEK



COLLECTION

Peek is a compact recessed adjustable spotlight series. The catalogue pages show a mix of source types across the merged codes, all aimed at directional accent lighting in a small format.

Peek


Adjustable - Spotlight - Recessed

ACU 230001



Wattage	Beam Angle
3W	15° 24°
Colors Temperature	Lumen Output
3000k	148 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 230002



Wattage	Beam Angle
3W	15°-24°
Colors Temperature	Lumen Output
3000k	65 - 78 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





Peek

Adjustable - Spotlight - Recessed

ACU 230003




Wattage	Beam Angle
3W	15° 24°
Colors Temperature	Lumen Output
3000k	108 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Peek

Adjustable - Spot light - Recessed - Zoomable

ACU 230004

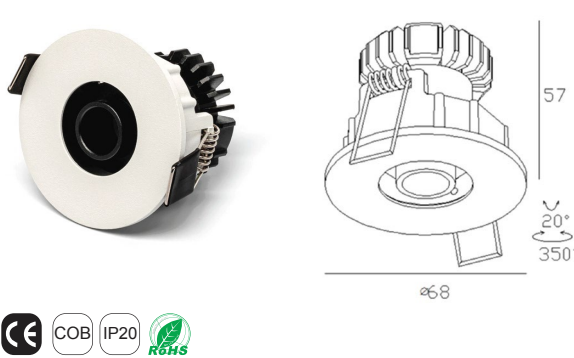


Wattage	Beam Angle
3W	8°
Colors Temperature	Lumen Output
3000k	128 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Peek

Adjustable - Spotlight - Recessed

ACU 230005

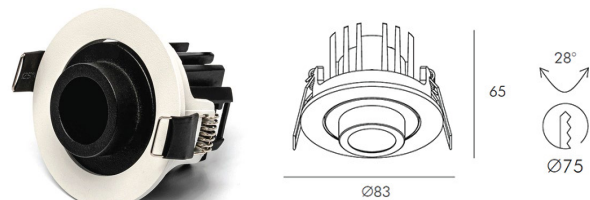

Wattage	Beam Angle
5W	5°
Colors Temperature	Lumen Output
3000k	143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






RAY

C O L L E C T I O N


Ray is an adjustable recessed spotlight series offered in multiple frame expressions, including round and square visual options, while keeping a focused accent-lighting role.

ACU 232001



Wattage	Beam Angle
7W	15° 35°
Colors Temperature	Lumen Output
3000k	378 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 232002




Wattage	Beam Angle
12W	15° 35°
Colors Temperature	Lumen Output
3000k	700 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 232003




Wattage	Beam Angle
12W	15° 35°
Colors Temperature	Lumen Output
3000k	770 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 232004

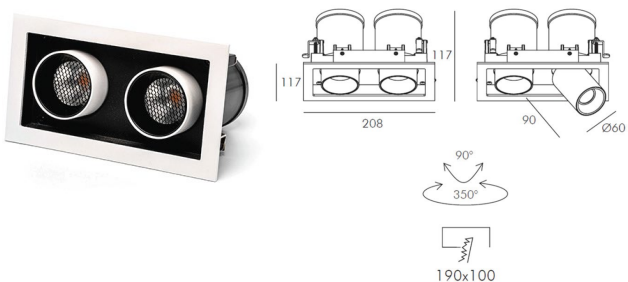

Wattage	Beam Angle
2x12W	15° 35°
Colors Temperature	Lumen Output
3000k	1455 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 232005

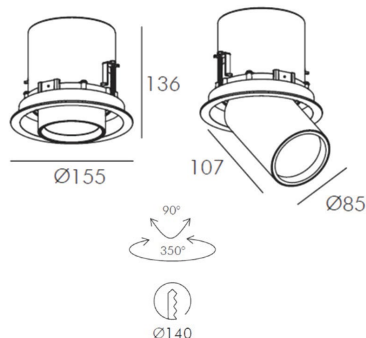

Wattage	Beam Angle
25W	15° 45°
Colors Temperature	Lumen Output
3000k	1780 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum







SPARK

COLLECTION


Spark is an adjustable spotlight series offered in multiple frame expressions, including trimless, round, square, rectangular, and stadium-like forms. It is a broader family built around focused recessed accent lighting.



Spark

Adjustable – Downlight & Spotlight – Recessed

ACU 231001

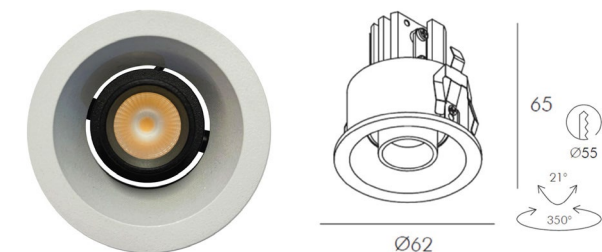


Wattage	Beam Angle
1x7W	20° 30°
Colors Temperature	Lumen Output
3000k	358 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Spark

Adjustable – Downlight & Spotlight – Recessed – Trimless

ACU 231002

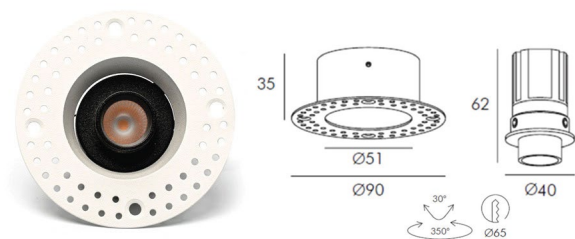


Wattage	Beam Angle
1x7W	20° 30°
Colors Temperature	Lumen Output
3000k	358 Lm
Installation	Rated Life Hours
Trimless Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Spark

Adjustable – Downlight & Spotlight – Recessed – Trimless

ACU 231003




Wattage	Beam Angle
2x7W	20° 30°
Colors Temperature	Lumen Output
3000k	744 Lm
Installation	Rated Life Hours
Trim-Less Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Spark

Adjustable – Downlight & Spotlight – Recessed

ACU 231004




Wattage	Beam Angle
1x7W	20° 30°
Colors Temperature	Lumen Output
3000k	363 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Spark


Adjustable – Downlight & Spotlight – Recessed

ACU 231005



Wattage	Beam Angle
2x7W	20° 30°
Colors Temperature	Lumen Output
3000k	803 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 231006




Wattage	Beam Angle
1x10W	20° 35°
Colors Temperature	Lumen Output
3000k	612 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Spark


Adjustable – Downlight & Spotlight – Recessed

ACU 231007

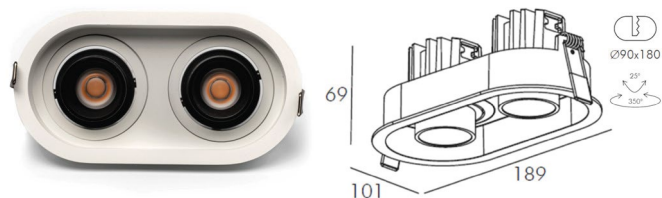

Wattage	Beam Angle
2x10W	20° 35°
Colors Temperature	Lumen Output
3000k	1143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 231008

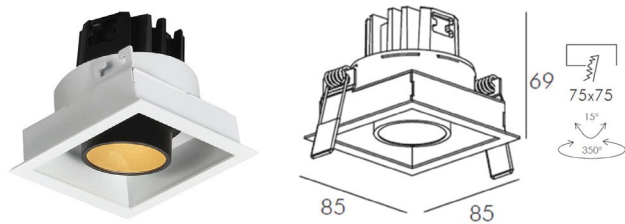


Wattage	Beam Angle
1x10W	20° 35°
Colors Temperature	Lumen Output
3000k	612 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Spark


Adjustable – Downlight & Spotlight – Recessed

ACU 231009

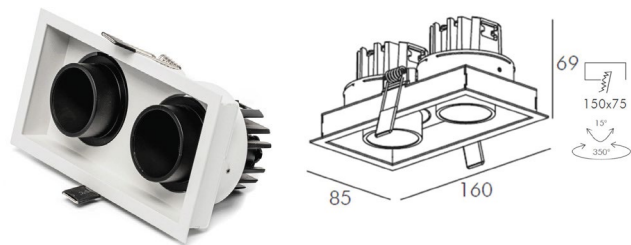

Wattage	Beam Angle
2x10W	20° 35°
Colors Temperature	Lumen Output
3000k	1143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 231010

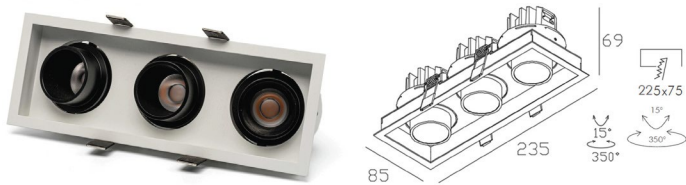

Wattage	Beam Angle
3x10W	20° 35°
Colors Temperature	Lumen Output
3000k	1747 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Velora is a clean surface-mounted downlight for residential and commercial spaces, designed to provide comfortable illumination through a simple architectural form. Its minimal profile integrates naturally into interiors while maintaining a refined ceiling presence.

Velora Cubic


Fixed – Downlight & Spotlight – Surface Mounted

ACU DSM 261010



Wattage	Beam Angle
7 W	15° 24° 35°
Colors Temperature	Lumen Output
3000k	440 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU DSM 261011



Wattage	Beam Angle
12 W	15° 24° 35°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum






Velora Cubic

Fixed – Downlight & Spotlight – Surface Mounted

ACU DSM 261012



Wattage	Beam Angle
18 W	15° 24° 35°
Colors Temperature	Lumen Output
3000k	1280 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum





VELORA C


COLLECTION

Velora C is a surface-mounted downlight with an elegant cylindrical silhouette, designed to deliver soft, balanced illumination through a defined exterior. Its rounded body gives the fixture a cleaner look while staying minimal, making it suitable for residential and commercial interiors.

Velora Cylindric


Fixed – Downlight & Spotlight – Surface Mounted

ACU DSM 261015



Wattage	Beam Angle
8 W	15° 24° 36°
Colors Temperature	Lumen Output
3000k	720 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU DSM 261016



Wattage	Beam Angle
12 W	15° 24° 36°
Colors Temperature	Lumen Output
3000k	1080 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum









Step is a recessed fixture positioned more around decorative lighting effect than raw output quantity, making it useful where subtle effect and guidance matter.

Step

Fixed – Floor Wash –Recessed

ACU 237003



Wattage

3 W

Beam Angle

110°

Colors Temperature

3000k

Lumen Output

Decorative Lumen Effect

Installation

Recessed

Rated Life Hours

30,000 – 50,000H

CRI

≥90

Colors

■ Black □ White

Input Voltage

220V AC
(Via the Built In Driver)

Materials

Powder Coated
Aluminum + Iron + PC

3 Mode Switch:

1. Always on
2. Infrared Motion Sensing
3. Infrared + Light Sensing



AURIGA


I P 2 0 L E D S t r i p L i g h t

Auriga is a modern LED strip-light solution designed to deliver soft, continuous indirect illumination for comfortable and inviting interiors. The catalogue recommends it for ceilings, coves, and shelving.

Auriga

IP20 RGBW Fixed – Strip Light – Surface Mounted – SMD

ACU ST 17041

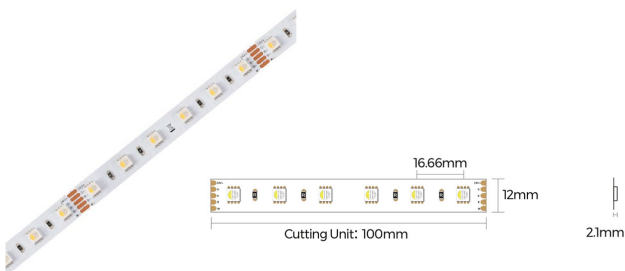


Wattage	Beam Angle
19 W/m	120°
Colors Temperature	Lumen Output
RGBW3000	700 lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

Auriga

IP20 – Strip Light – Surface Mounted – SMD

ACU ST 17047

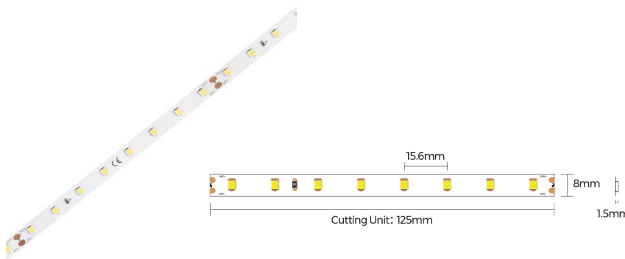

Wattage	Beam Angle
4.8 W/m	120°
Colors Temperature	Lumen Output
3000k	540 lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips






Auriga


IP20 – Strip Light – Surface Mounted – SMD

ACU ST 17048

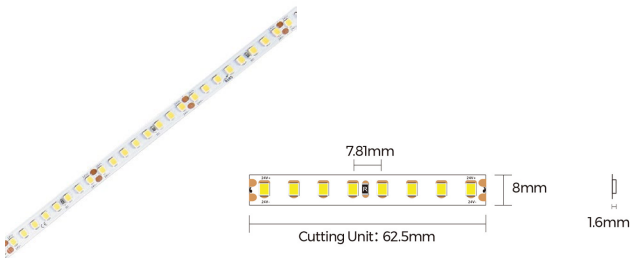

Wattage	Beam Angle
9.6 W/m	120°
Colors Temperature	Lumen Output
3000k	1090 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

ACU ST 17049C

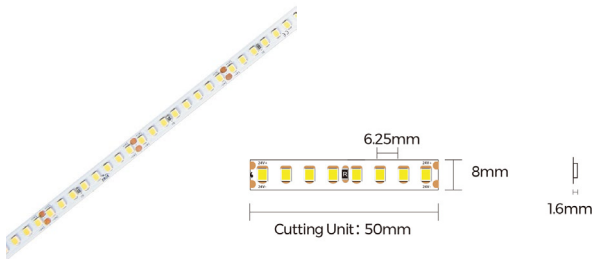

Wattage	Beam Angle
14.4 W/m	120°
Colors Temperature	Lumen Output
3000k	1585 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips






Auriga


Fixed – Strip Light – Surface Mounted – Tunable White – SMD

ACU ST 202111

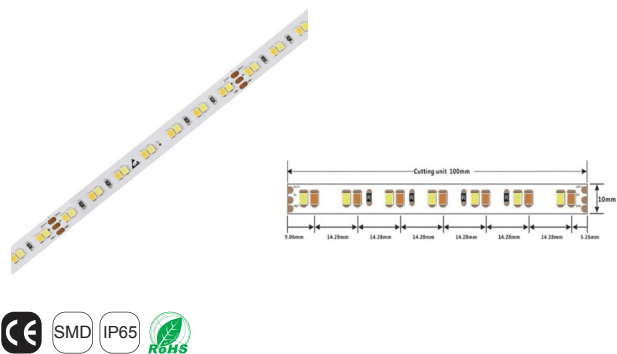

Wattage	Beam Angle
9.6 W/m	120°
Colors Temperature	Lumen Output
Tunable 2700–6000K	750 lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

ACU ST 202101

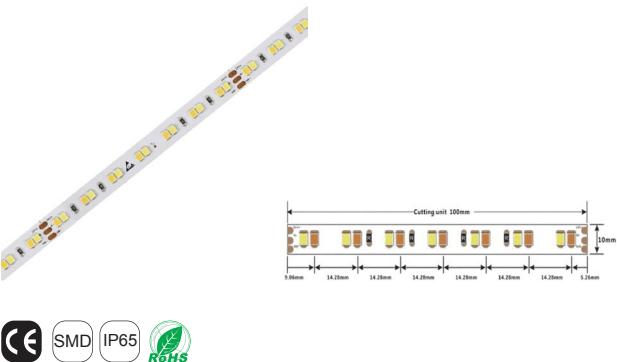

Wattage	Beam Angle
19 W/m	120°
Colors Temperature	Lumen Output
Tunable 2700–6000K	1505 lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips



Auriga

IP20 – Strip Light – Surface Mounted – COB

ACU ST 202003



Wattage	Beam Angle
10 W/m	120°
Colors Temperature	Lumen Output
3000k	900 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

ACU ST 202004



Wattage	Beam Angle
5 W/m	120°
Colors Temperature	Lumen Output
3000k	450 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips





INDOOR LINEAR

C O L L E C T I O N

Indoor Linear is a modern linear-light family designed to provide uniform illumination, high visual comfort, and an elegant form. It appears in multiple optical/diffuser expressions and installation directions.

Surface Mounted & Suspended

INDOOR LINEAR


HONEYCOMB

DIFFUSER

Indoor Linear

Honeycomb Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240101SM



Wattage	Beam Angle
34W	60°x75°
Colors Temperature	Lumen Output
3000k	2085 Lm
4000k	2195 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU IL 240102SM



Wattage	Beam Angle
46W	60°x75°
Colors Temperature	Lumen Output
3000k	2820 Lm
4000k	2965 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum





Indoor Linear

Honeycomb Diffuser - Fixed - Linear Light - Surface Mounted & Suspended

ACU IL 240103SM



Wattage	Beam Angle
51W	60°x75°
Colors Temperature	Lumen Output
3000k	3125 Lm
4000k	3290 Lm
Installation	Rated Life Hours
Surface Mounted - Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU IL 240104SM



Wattage	Beam Angle
68W	60°x75°
Colors Temperature	Lumen Output
3000k	4165 Lm
4000k	4385 Lm
Installation	Rated Life Hours
Surface Mounted - Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



LOUVER


DIFFUSER



Indoor Linear


Louver Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240201SM

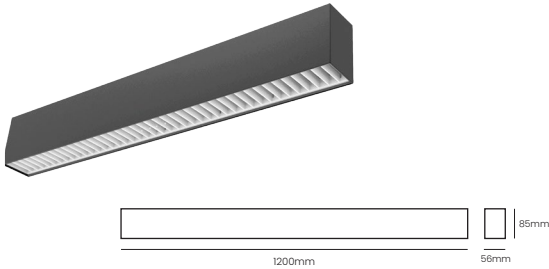

Wattage	Beam Angle
34W	72°
Colors Temperature	Lumen Output
3000k	1760 Lm
4000k	1890 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU IL 240202SM

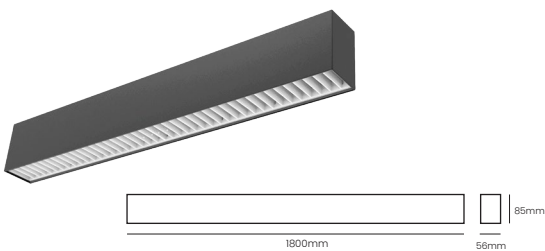


Wattage	Beam Angle
51W	72°
Colors Temperature	Lumen Output
3000k	2690 Lm
4000k	2830 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Indoor Linear

Louver Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240203SM



Wattage	Beam Angle
68W	72°
Colors Temperature	Lumen Output
3000k	3550 Lm
4000k	3770 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



PRISMATIC


DIFFUSER



Indoor Linear


Prismatic Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240301SM

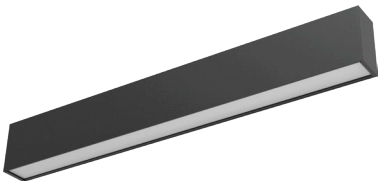

Wattage	Beam Angle
28W	65°x70°
Colors Temperature	Lumen Output
3000k	2745 Lm
4000k	2890 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU IL 240302SM

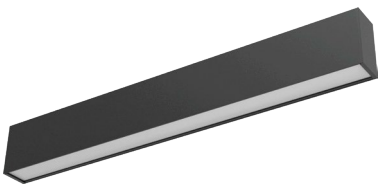

Wattage	Beam Angle
34W	65°x70°
Colors Temperature	Lumen Output
3000k	3335 Lm
4000k	3510 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Indoor Linear


Prismatic Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240303SM



Wattage	Beam Angle
40W	65°x70°
Colors Temperature	Lumen Output
3000k	3920 Lm
4000k	4130 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



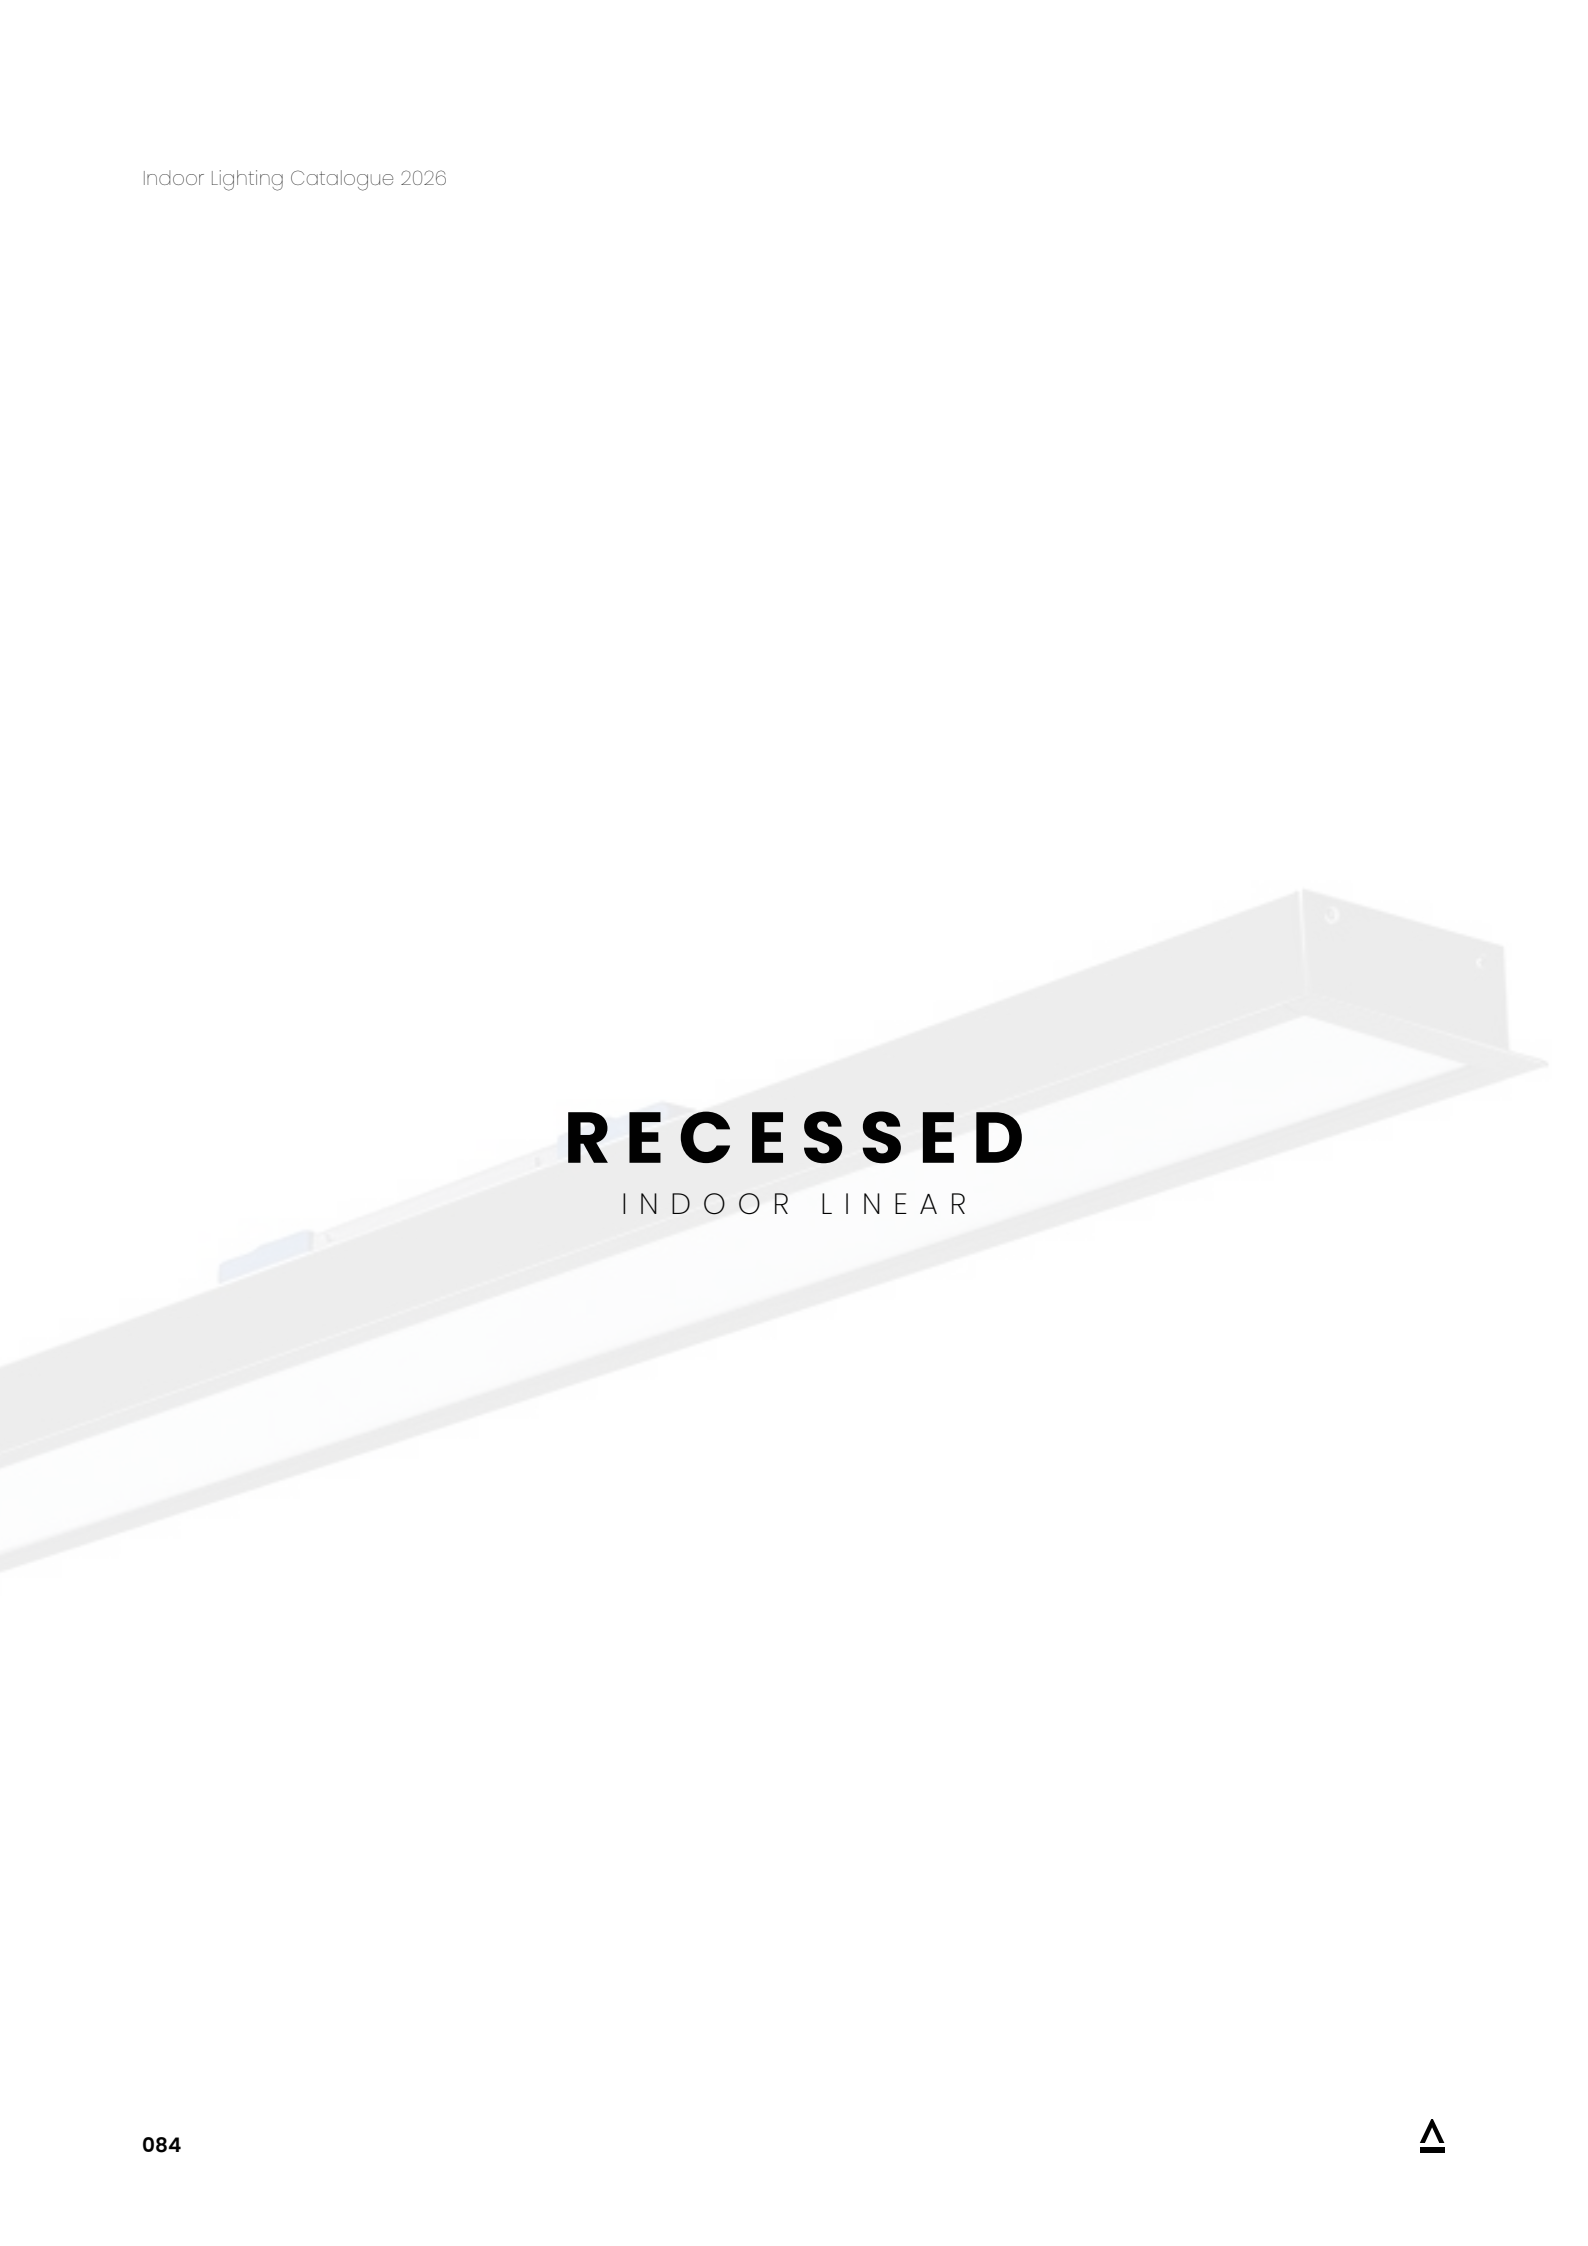

RECESSED


INDOOR LINEAR



Indoor Linear


Fixed – Linear Light – Recessed

ACU IL 240401R



Wattage	Beam Angle
19W	110°
Colors Temperature	Lumen Output
3000k	1900 Lm
4000k	2020 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU IL 240402R




Wattage	Beam Angle
27W	110°
Colors Temperature	Lumen Output
3000k	2700 Lm
4000k	2870 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Indoor Linear


Fixed – Linear Light – Recessed

ACU IL 240403R



Wattage	Beam Angle
38W	110°
Colors Temperature	Lumen Output
3000k	3800 Lm
4000k	4040 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU IL 240404R




Wattage	Beam Angle
27W	110°
Colors Temperature	Lumen Output
3000k	2800 Lm
4000k	2980 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Indoor Linear


Fixed – Linear Light – Recessed

ACU IL 240405R

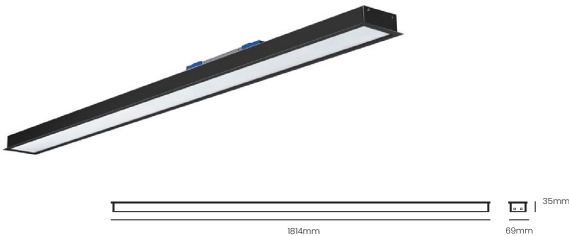

Wattage	Beam Angle
38W	110°
Colors Temperature	Lumen Output
3000k	3950 Lm
4000k	4200 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU IL 240406R

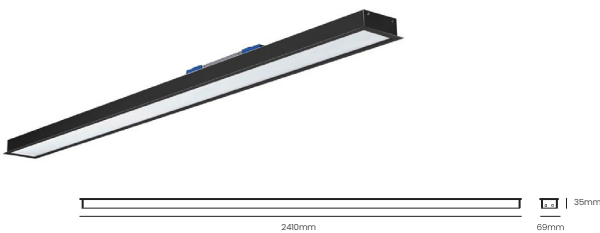

Wattage	Beam Angle
53W	110°
Colors Temperature	Lumen Output
3000k	5510 Lm
4000k	5860 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Indoor Linear

Fixed – Linear Light – Recessed

ACU IL 240407R



Wattage	Beam Angle
38W	110°
Colors Temperature	Lumen Output
3000k	3950 Lm
4000k	4200 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU IL 240408R




Wattage	Beam Angle
60W	110°
Colors Temperature	Lumen Output
3000k	6230 Lm
4000k	6630 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Indoor Linear

Fixed – Linear Light – Recessed

ACU IL 240409R



Wattage	Beam Angle
75W	110°
Colors Temperature	Lumen Output
3000k	7790 Lm
4000k	8290 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Meteor Magnetic is a magnetic lighting system that allows fixtures to snap and slide along magnetic tracks, creating flexible and dynamic lighting compositions. It combines architectural precision with a modular system approach.

Meteor Magnetic


Fixed – Grazer Light – Track Mounted

ACU MM 243010

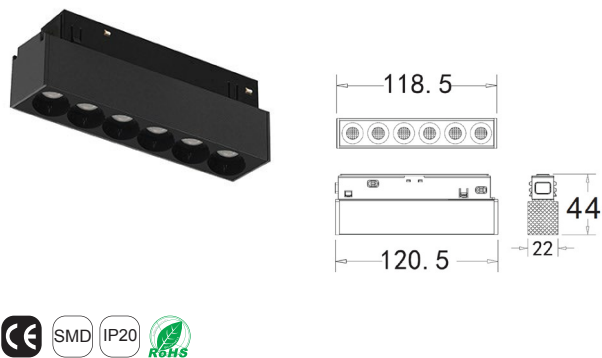

Wattage	Beam Angle
6W	24° 38°
Colors Temperature	Lumen Output
3000k	510 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243011

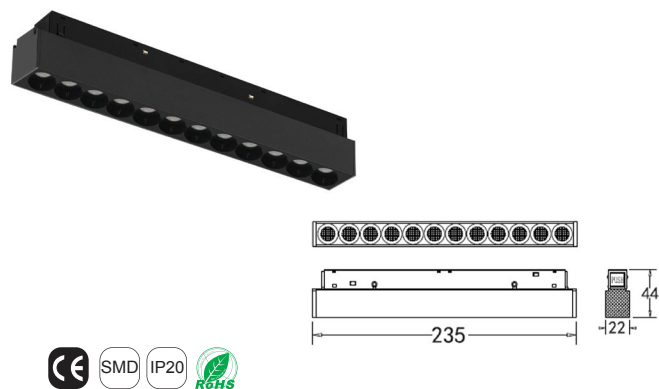

Wattage	Beam Angle
10W	24° 38°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC






Meteor Magnetic


Fixed – Grazer Light – Track Mounted

ACU MM 243012



Wattage	Beam Angle
16W	24° 38°
Colors Temperature	Lumen Output
3000k	1360 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243013




Wattage	Beam Angle
24W	24° 38°
Colors Temperature	Lumen Output
3000k	2040 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC



Meteor Magnetic


Fixed – Linear Light – Track Mounted

ACU MM 243020

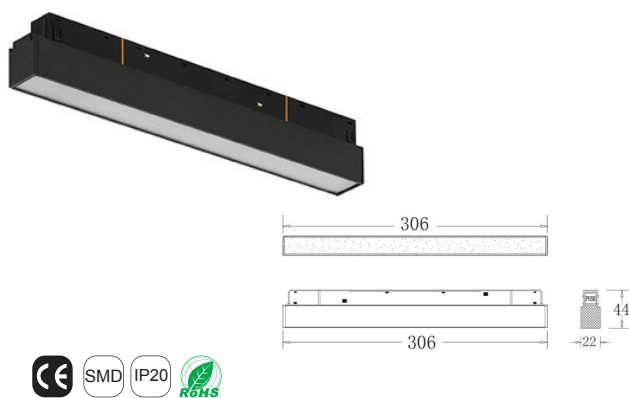

Wattage	Beam Angle
10W	110°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243021

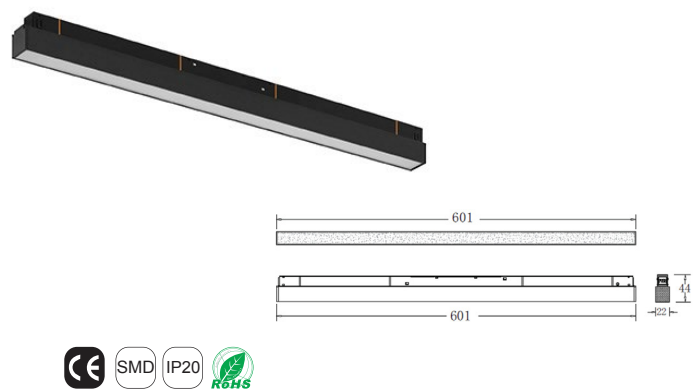

Wattage	Beam Angle
16W	110°
Colors Temperature	Lumen Output
3000k	1360 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC AC (Via the External Driver)	Powder Coated Aluminum + PC






Meteor Magnetic

Fixed – Linear Light – Recessed

ACU MM 243022

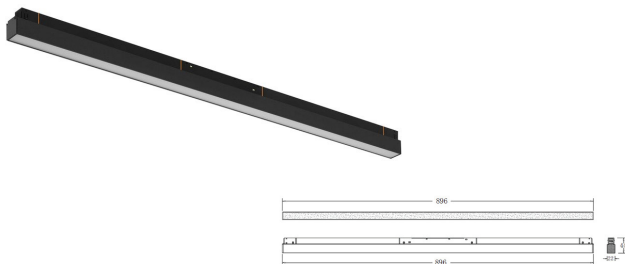


Wattage	Beam Angle
24W	110°
Colors Temperature	Lumen Output
3000k	2040 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Meteor Magnetic

Rotatable & Adjustable – Spotlight – Track Mounted

ACU MM 243030

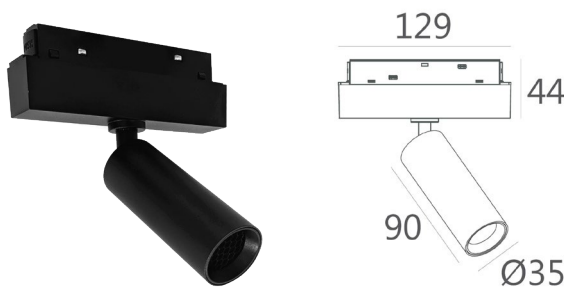

Wattage	Beam Angle
8W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	610 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC



Meteor Magnetic


Rotatable & Adjustable – Double Spot Light – Track Mounted

ACU MM 243031



Wattage	Beam Angle
2x8W	24° 40°
Colors Temperature	Lumen Output
3000k	1220 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243032

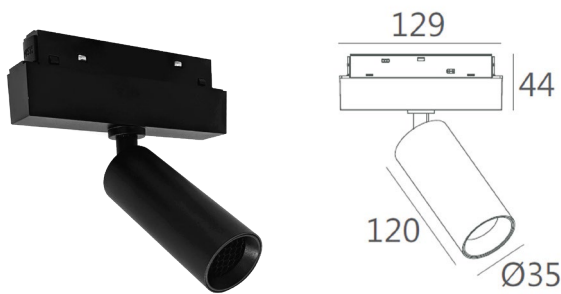

Wattage	Beam Angle
12W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	943 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC






Meteor Magnetic


Zoomable, Rotatable & Adjustable – Spotlight – Track Mounted

ACU MM 243034

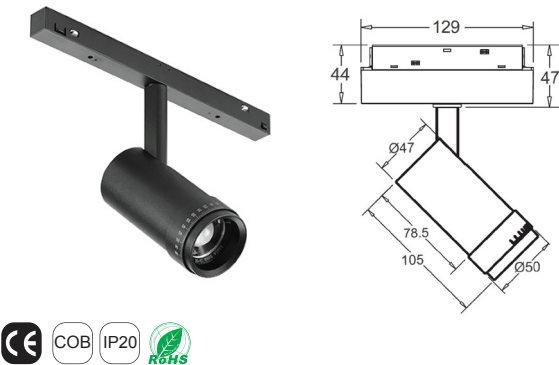

Wattage	Beam Angle
10W	10° to 60°
Colors Temperature	Lumen Output
3000k	739 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243035

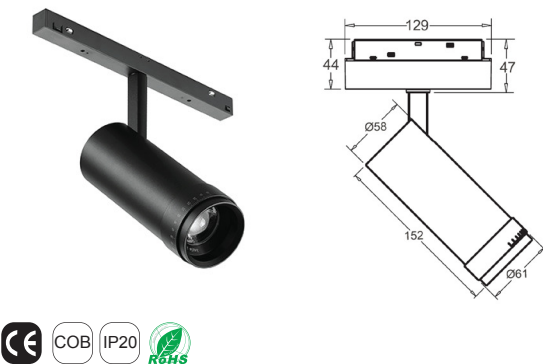

Wattage	Beam Angle
16W	10° to 60°
Colors Temperature	Lumen Output
3000k	1360 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC



Meteor Magnetic

Wide – Rotatable & Adjustable – Downlight & Spotlight – Track Mounted

ACU MM 243036




Wattage	Beam Angle
10W	10° 24° 36°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

Meteor Magnetic

Zoomable, Rotatable & Adjustable – Motorized – Spotlight & Downlight – Track Mounted

ACU MM 243038

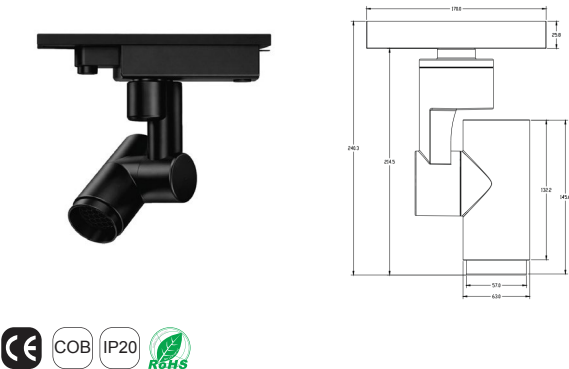


Wattage	Beam Angle
20W	15-50 Zoomable °
Colors Temperature	Lumen Output
2700 – >6500 Tunable	1700 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
48V DC (Via the External Driver)	Powder Coated Aluminum



Meteor Magnetic


Adjustable – Grazer Light – Track Mounted

ACU MM 243040

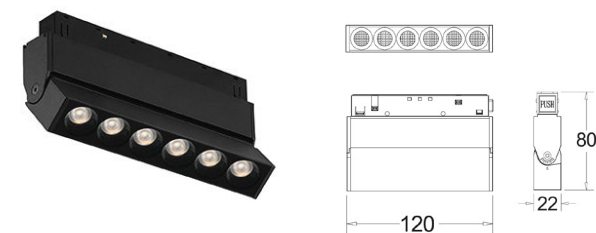

Wattage	Beam Angle
6W	24° 38°
Colors Temperature	Lumen Output
3000k	510 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243041

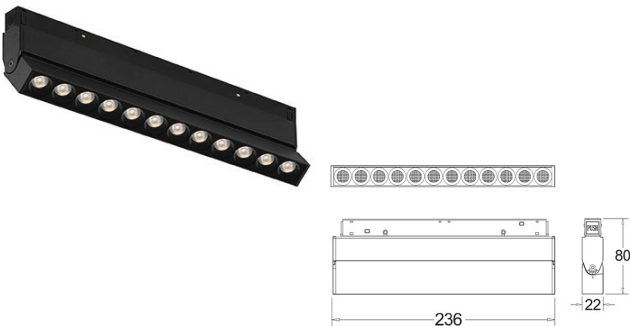

Wattage	Beam Angle
10W	24° 38°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC






Meteor Magnetic

Adjustable – Grazer Light – Track Mounted

ACU MM 243042

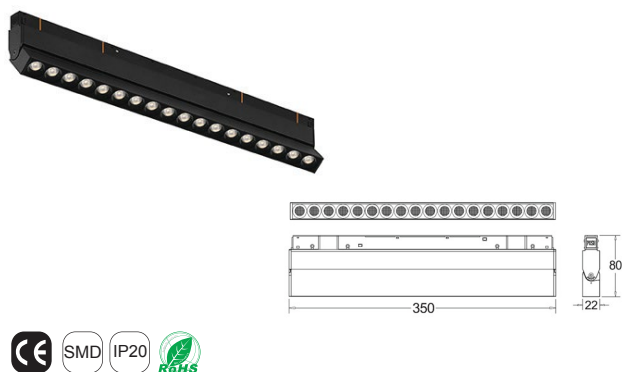

Wattage	Beam Angle
16W	24° 38°
Colors Temperature	Lumen Output
3000k	1360 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243043




Wattage	Beam Angle
24W	24° 38°
Colors Temperature	Lumen Output
3000k	2040 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC



Meteor Magnetic


Adjustable – Linear Light – Track Mounted

ACU MM 243050

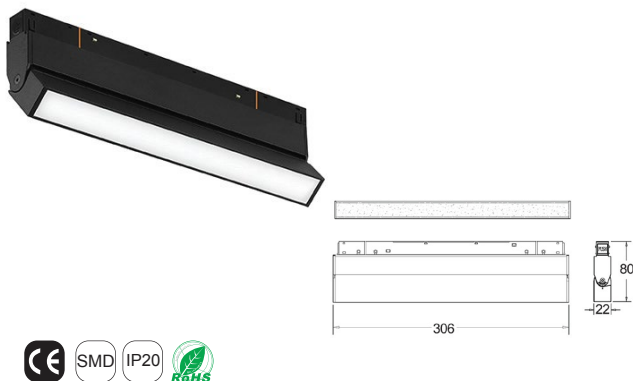

Wattage	Beam Angle
10W	110°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243051

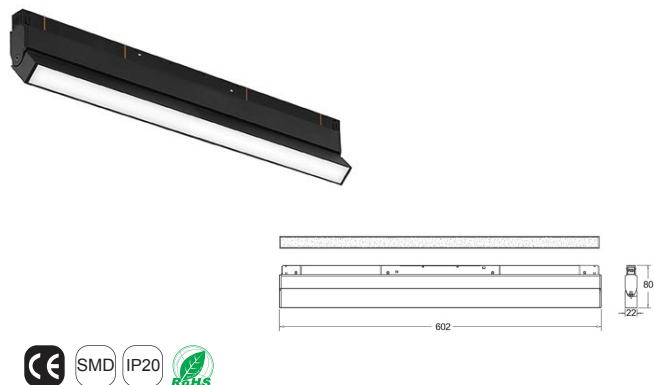


Wattage	Beam Angle
16W	110°
Colors Temperature	Lumen Output
3000k	1360 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC



Meteor Magnetic


Decorative Light – Track Mounted – Suspended

ACU MM 243060



Wattage	Beam Angle
10W	24° 40° 60°
Colors Temperature	Lumen Output
3000k	89l Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243061



Wattage	Beam Angle
12W	24° 38°
Colors Temperature	Lumen Output
3000k	576 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC






Meteor Magnetic


Decorative Light – Track Mounted – Suspended

ACU MM 243062



Wattage	Beam Angle
6W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	315 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243063



Wattage	Beam Angle
6W	235°
Colors Temperature	Lumen Output
3000k	375 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC



Meteor Magnetic

Decorative Light – Track Mounted

ACU MM 243064




Wattage	Beam Angle
16W	110°
Colors Temperature	Lumen Output
3000k	1063 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

Meteor Magnetic

Adjustable – Wall Washer – Track Mounted

ACU MM 243065

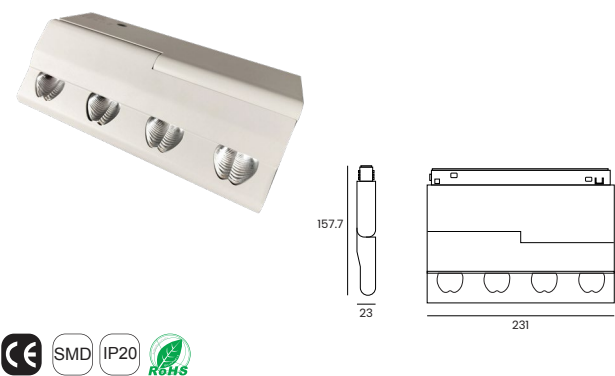

Wattage	Beam Angle
15W	33°
Colors Temperature	Lumen Output
3000k	1000 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum








METEOR TRACK & ACCESSORIES

Before Gypsum Ceiling

ACU MMT 001BGR

Track Light

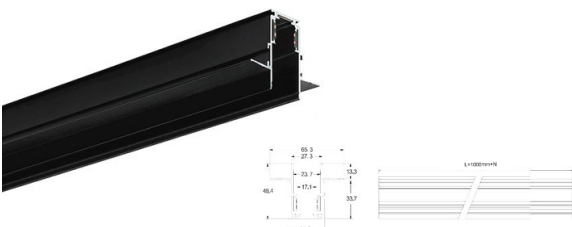

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminum + Copper



ACU MMT 002BGR

Track Light

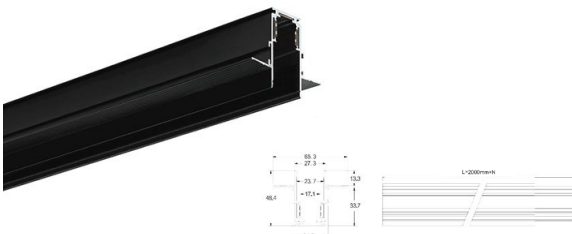

Installation

Recessed

Colors

■ Black □ White

Materials

Aluminum + Copper



ACU ACMM 1L-2.5AC

Track Rail with AC Grill



Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0229BGR

Right Angle Connector L-shape

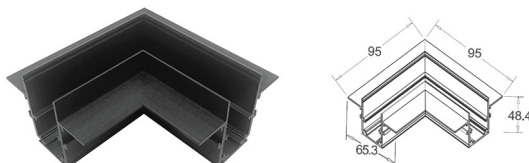

Installation

Recessed

Colors

■ Black □ White

Materials


Aluminium + Copper



Before Gypsum Ceiling

ACU MMAC 0230BGR

Outer Angle Connector



Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0231BGR

Inner Angle Connector



Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0236BGR

T Connector



Installation

Recessed

Colors

■ Black □ White



Materials

Aluminium + Copper



ACU MMAC 0237BGR

X Connector



Installation

Recessed

Colors


■ Black □ White

Materials

Aluminium + Copper



ACU MMT 001AGR

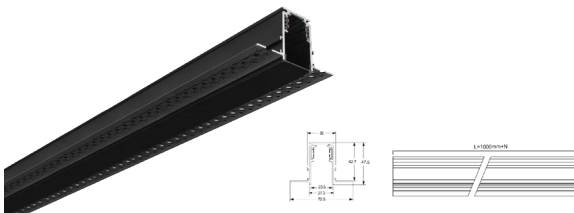

Installation

Recessed

Colors


■ Black □ White

Materials

Aluminium + Copper



ACU MMT 002AGR

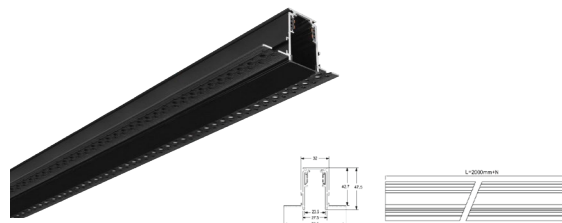

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0229AGR

Right Angle Connecto L-shaper

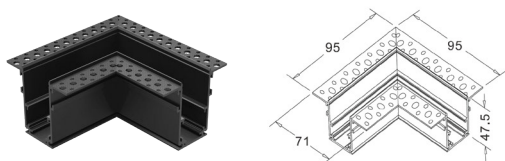

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0230AGR

Outer Angle Connector

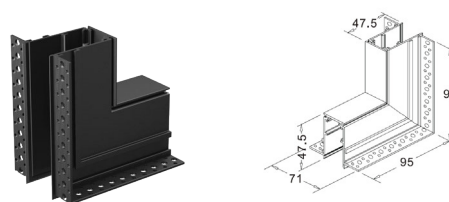

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0231AGR

Inner Angle Connector

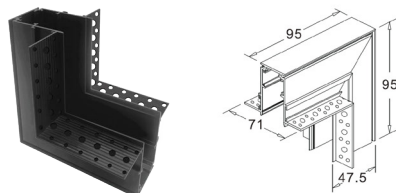

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0236AGR

T Connector

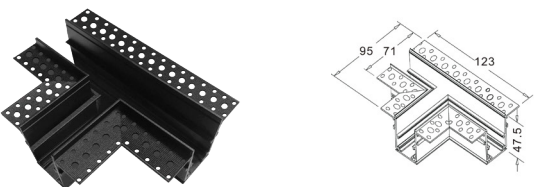

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0237AGR

X Connector

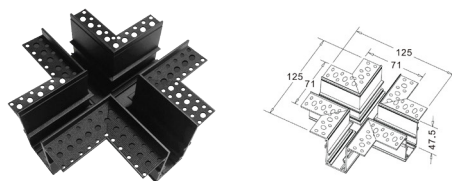

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



Surface Mounted

ACU MMT 001SM

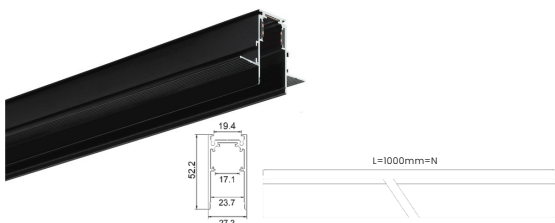

Installation

Surface Mounted

Colors


■ Black □ White

Materials

Aluminum + Copper



ACU MMT 002SM

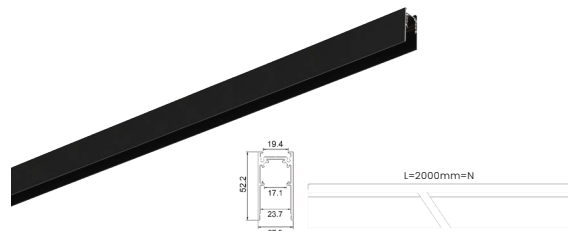

Installation

Surface Mounted

Colors

■ Black □ White


Materials

Aluminum + Copper



ACU MMAC 0226

Right Angle Connecto L-shaperr

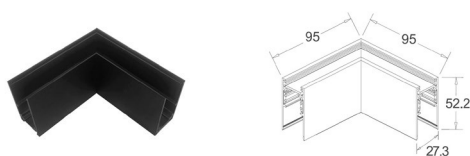

Installation

Surface Mounted

Colors

■ Black □ White

Materials

Aluminum + Copper



ACU MMAC 0227

Outer Angle Connector



Installation

Surface Mounted

Colors

■ Black □ White

Materials


Aluminum + Copper



Surface Mounted

ACU MMAC 0228

Inner Angle Connector

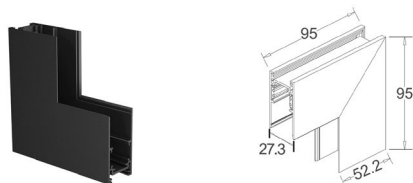

Installation

Surface Mounted

Colors

■ Black □ White


Materials

Aluminum + Copper



ACU MMAC 0252

T connector

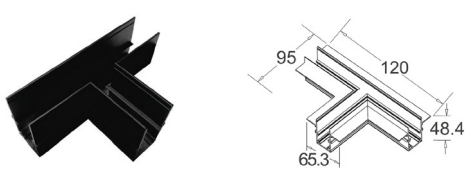

Installation

Surface Mounted

Colors

■ Black □ White


Materials

Aluminum + Copper



ACU MMAC 0253

X connector

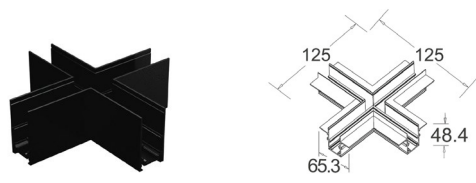

Installation

Surface Mounted

Colors

■ Black □ White

Materials

Aluminum + Copper



ACU MMAC 0225

Suspension Accessories



Installation

Suspension Kit

Materials


Aluminum + Copper



POWER

Accessories

ACU MMAC 0212

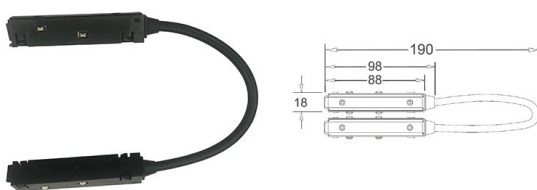

Installation

Magnetic Track Mounted


Colors

■ Black □ White

Corner Power Connector



ACU MMAC 0221

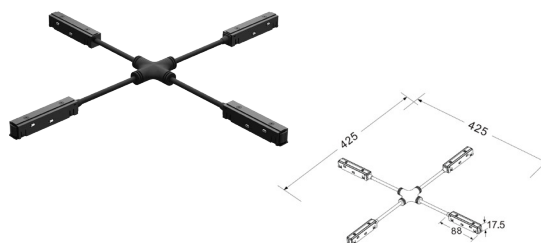

Installation

Magnetic Track Mounted

Colors

■ Black □ White

4-side Power Connector




ACU MMAC 0222




Installation	Colors
Magnetic Track Mounted	■ Black □ White
Triangle Power Connector	  

ACU MMAC 0223

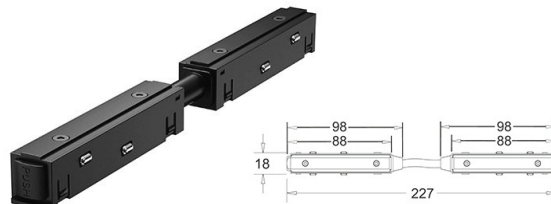


Installation	Colors
Magnetic Track Mounted	■ Black □ White
Straight Power Connector	  

ACU MMAC 0224

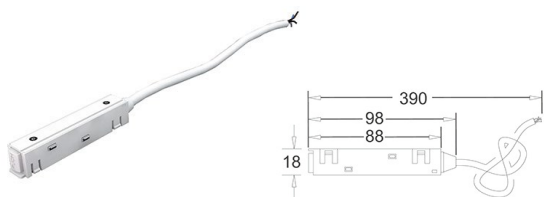

Installation	Colors
Magnetic Track Mounted	■ Black □ White
Power Feeder	  



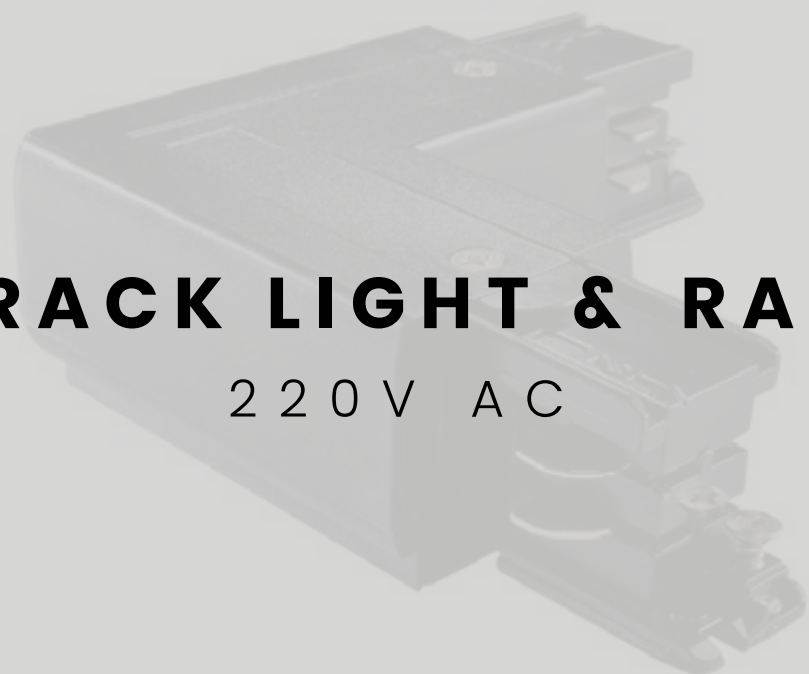


TRACK LIGHT & RAIL

220 V A C

Mensa Track

Track Rail – On/Off


ACU TR 0410R



■ Black □ White

Installation	IP RATE
Recessed	20

ACU TR 0410S



■ Black □ White

Installation	IP RATE
Surface Mounted	20



Mensa Track Accessories

Power Feeder


ACU PF 0431-L



■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU PF 0431-R

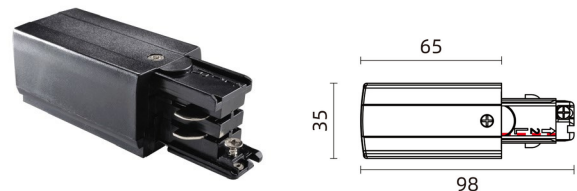

■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0432

End Cap



■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0433

Fixed Straight Power Joiner (M & E)



■ Black □ White

Installation	IP RATE
Track Mounted	20



Mensa Track Accessories

Power Feeder

ACU TA M0433

Fixed Straight Joiner (M)



■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU PF 0434

Middle Power Feeder




■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0434C

Cover for Middle Connector

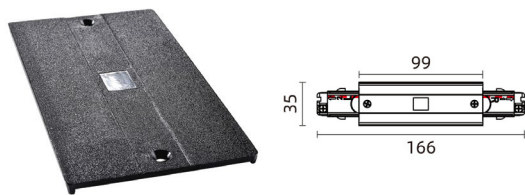


■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0435 Adj

Adjustable Connector

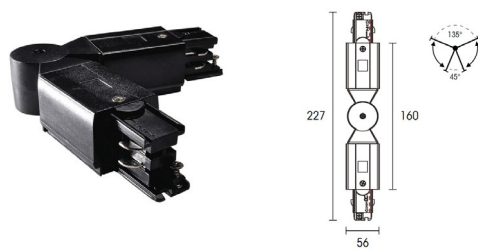

■ Black □ White

Installation	IP RATE
Track Mounted	20




Mensa Track Accessories

L Connector

ACU TA 0435-L

Left Side

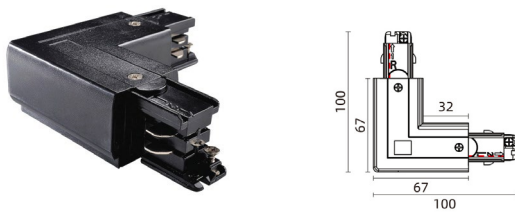


■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0435-R

Right Side

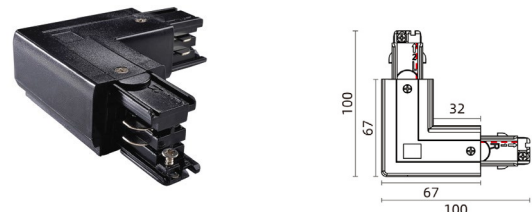

■ Black □ White

Installation	IP RATE
Track Mounted	20

Mensa Track Accessories

Cover for L-Connector

ACU TA 0435C



■ Black □ White

Installation	IP RATE
Track Mounted	20




Mensa Track Accessories

Twisted T Connector L1 → L2

Twisted T Connector R1 → R2

ACU TA 0436-L

Left Side

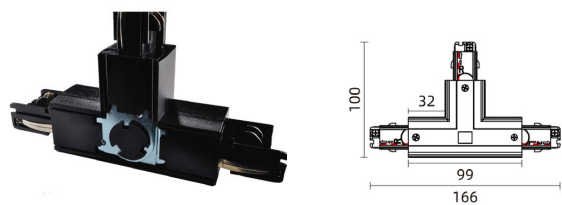


■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0436-R

Right Side

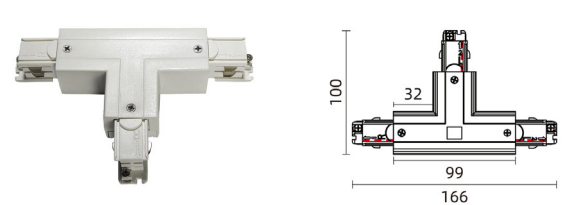

■ Black □ White

Installation	IP RATE
Track Mounted	20

Mensa Track Accessories

Cover for T-Connector

ACU TA 0436C



■ Black □ White


Installation	IP RATE
Track Mounted	20



Mensa Track Accessories

ACU TA 0437

X Connector





■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0437C

Cover for X-Connector





■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0438

Twisted L Connector (L & R)




■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0439

Flexible Track Rail Connector



■ Black □ White


Installation	IP RATE
Track Mounted	20



Mensa Track – DALI

Track Rail


ACU TR 0610R



■ Black □ White

Installation	IP RATE
Recessed	20
DALI	

ACU TR 0610S



■ Black □ White


Installation	IP RATE
Surface Mounted	20
DALI	

Mensa Track Accessories – Dali

Power Feeder Left Side – DALI

ACU PF 0631-L

Left Side




■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

ACU PF 0631-R

Right Side



■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	




Mensa Track Accessories - Dali

Power Feeder

ACU PF 0631C

Cover for Power Feeder

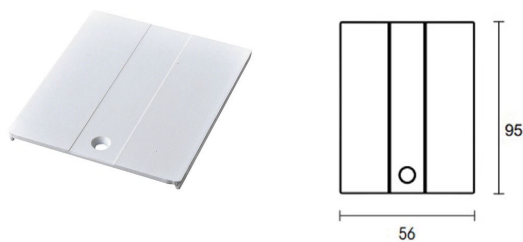


■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

ACU PF 0634

Middle Power Feeder

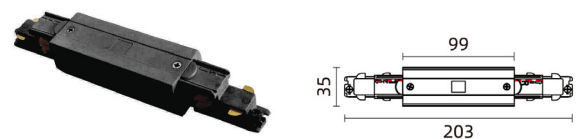


■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

Mensa Track Accessories - Dali

Coupler / Fixed Straight Power Joiner - DALI

ACU TA 0633

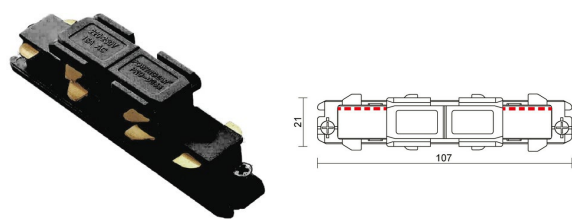

■ Black □ White


Installation	IP RATE
Track Mounted	20
DALI	



Mensa Track Accessories - Dali

L Connector L & R


ACU TA 0635-L

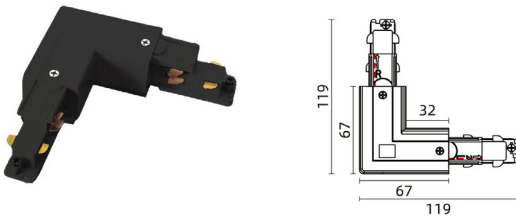

■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

ACU TA 0635-R

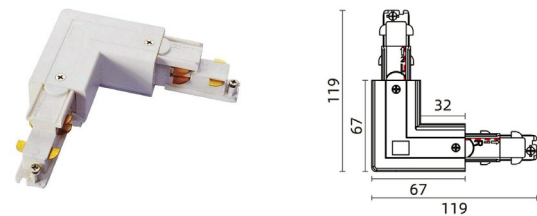


■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

ACU TA 0637

X Connector

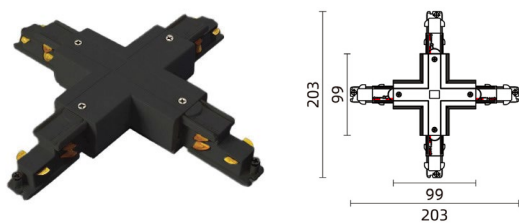

■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

ACU TA 0638

Twisted L Connector (L & R)



■ Black □ White


Installation	IP RATE
Track Mounted	20
DALI	



Mensa Track Accessories – Dali

Flexible Connector

ACU TA 0639

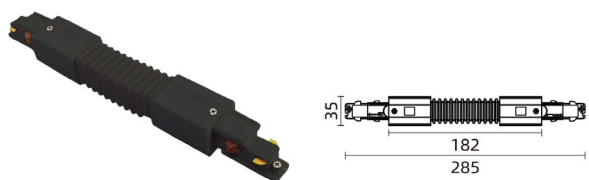


■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

Suspension Accessories

ACU SA 04

Mounting Clamp Bracket

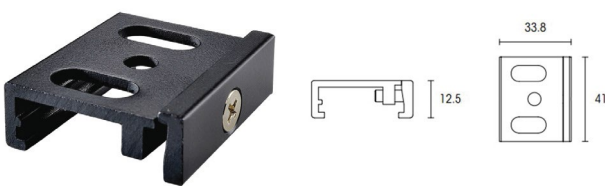


■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU SA 0418

Suspension Connection Clamp

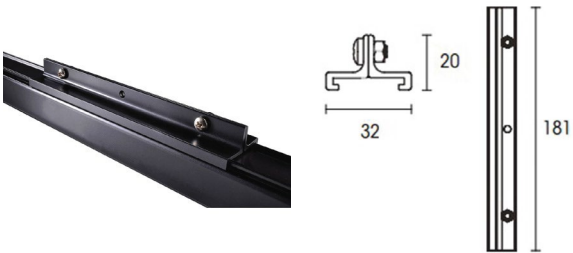

■ Black □ White

Installation	IP RATE
Track Mounted	20



Suspension Accessories

ACU SH 142

Suspension Hook




■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU SR 0447

Ceiling Rod Suspension Kit

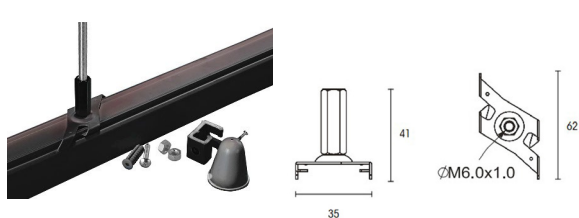


■ Black □ White

Installation	IP RATE
Track Mounted	20

Suspension Accessories

Suspension Kit (Wire)

ACU SW 0448



■ Black □ White


Installation	IP RATE
Track Mounted	20



Mono Track

Mono Track

ACU MT 100

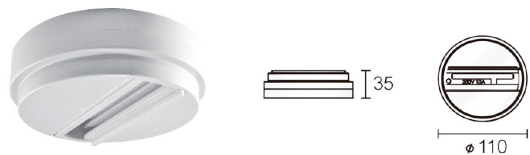

■ Black □ White

Installation	IP RATE
Surface Mounted	20
On / Off	

ACU MT 150



■ Black □ White

Installation	IP RATE
Surface Mounted	20
DALI	





PAVO TRACK

COLLECTION

Pavo is a flexible lighting family designed for residential, hospitality, retail, showroom, and restaurant applications. With high efficiency, multiple beam angles, and several wattage options, it offers precise adjustability, allowing light to be directed easily across different surfaces from a single source.




PAVO TRACK

ROTATABLE LINEAR

Pavo Linear

Rotatable – Linear Light – Track Mounted

ACU TL 244020

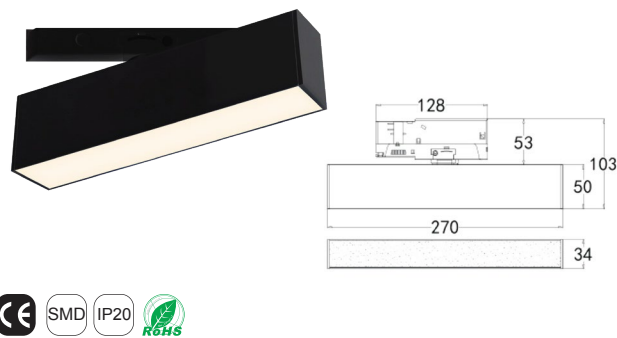

Wattage	Beam Angle
9W	110°
Colors Temperature	Lumen Output
3000k	801 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum

ACU TL 244021




Wattage	Beam Angle
18W	110°
Colors Temperature	Lumen Output
3000k	1440 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum



Pavo Linear

Rotatable – Linear Light – Track Mounted

ACU TL 244022

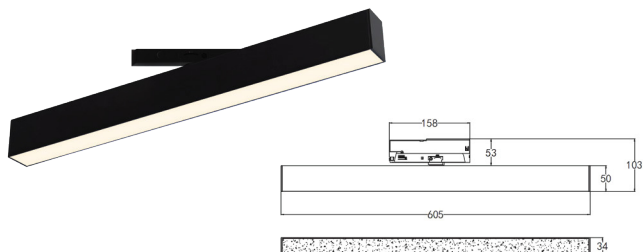

Wattage	Beam Angle
24W	110°
Colors Temperature	Lumen Output
3000k	2390 Lm
Installation	Rated Life Hours
Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum






PAVO TRACK

ADJUSTABLE LINEAR

Pavo Linear


Rotatable & Adjustable - Linear Light - Track Mounted

ACU TL 244025

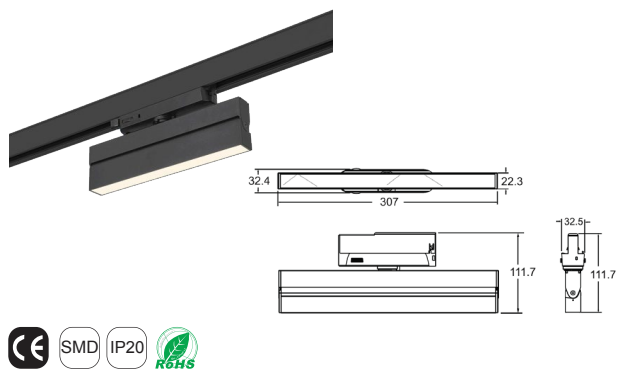

Wattage	Beam Angle
9W	110°
Colors Temperature	Lumen Output
3000k	765 Lm
Installation	Rated Life Hours
Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum

ACU TL 244026

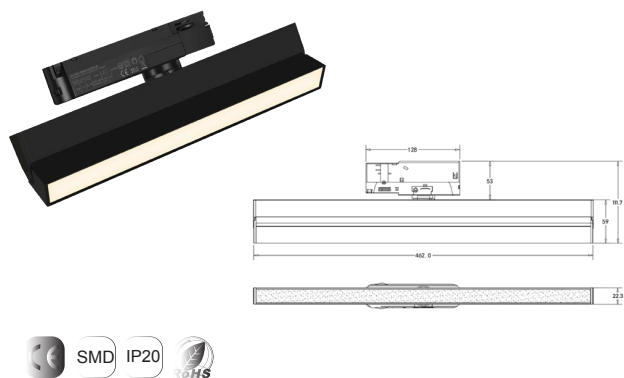


Wattage	Beam Angle
18W	110°
Colors Temperature	Lumen Output
3000k	1531 Lm
Installation	Rated Life Hours
Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum



Pavo Linear

Rotatable & Adjustable – Linear Light – Track Mounted

ACU TL 244027

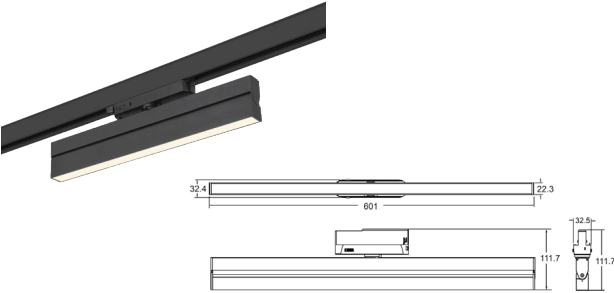

Wattage	Beam angle
24W	110°
Color Temperature	Lumen Output
3000k	1981Lm
Installation	Rated life hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC with (Via the Built In Driver)	Podwer Coated Aluminum






Pavo Grazer


Fixed – Grazer Light – Track Mounted

ACU TL 244030



Wattage	Beam Angle
9W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	801 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum

ACU TL 244031




Wattage	Beam Angle
18W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1423 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum



Pavo Grazer

Fixed – Grazer Light – Track Mounted

ACU TL 244032

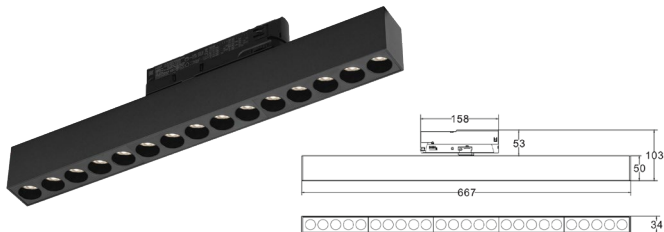

Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2108 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum






PAVO TRACK

ADJUSTABLE GRAZER

Pavo Grazer


Rotatable & Adjustable - Grazer Light - Track Mounted

ACU TL 244035

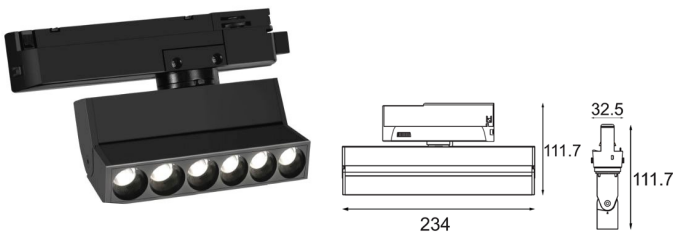

Wattage	Beam Angle
9W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum

ACU TL 244036

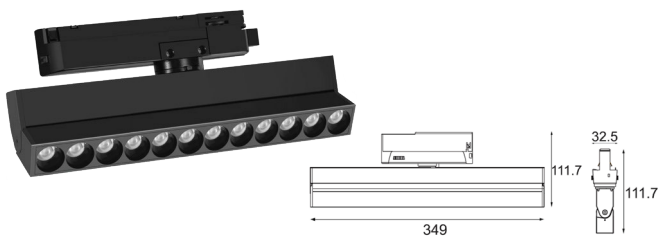

Wattage	Beam Angle
18W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1539 Lm
Installation	Rated Life Hours
Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum






Pavo Grazer

Rotatable & Adjustable – Grazer Light – Track Mounted

ACU TL 244037

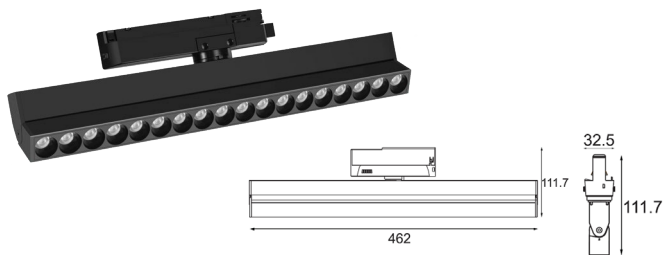

Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2263 lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum






HELENE

C O L L E C T I O N

Helene


Fixed -Downlight & Spotlight - Recessed

ACU 200801

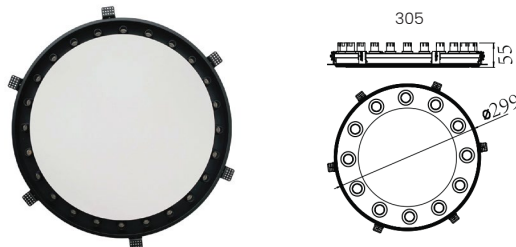

Wattage	Beam Angle
12x2W	12° 24° 36°
Colors Temperature	Lumen Output
3000k	1320 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 200802

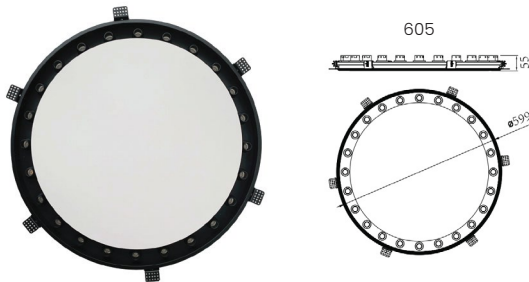

Wattage	Beam Angle
24x2W	12° 24° 36°
Colors Temperature	Lumen Output
3000k	2640 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Helene

Fixed -Downlight & Spotlight - Recessed

ACU 200803



Wattage	Beam Angle
36x2W	12° 24° 36°
Colors Temperature	Lumen Output
3000k	3960 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum







PONTO


COLLECTION

Ponto is introduced as a unified-base system that combines general, accent, and decorative lighting in one platform with easy installation. It spans architectural & decorative expressions under one family.

Ponto Base

Trimless

ACU BS 240000T

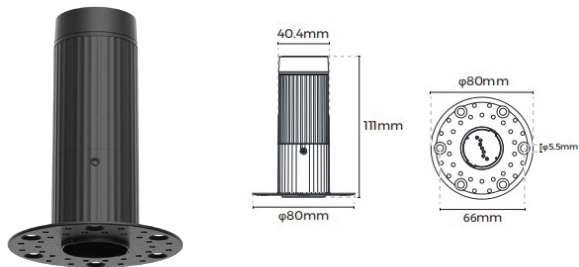


Wattage	Rated Current
150W	3A
CutOut	Maximum load
φ45mm	8Kg
Installation	Colors
Trimless Recessed	■ Black □ White
Materials	Input voltage
Powder Coated Aluminum	24V DC (Via the External Driver)

Ponto Base

Recessed

ACU BS 240000R

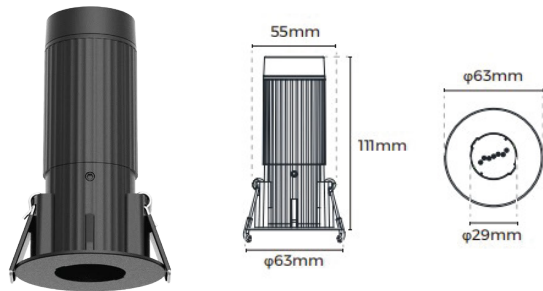

Wattage	Rated Current
150W	3A
CutOut	Maximum load
φ55mm	1Kg
Installation	Colors
Recessed	■ Black □ White
Materials	Input voltage
Powder Coated Aluminum	24V DC (Via the External Driver)



Ponto Spot light

Fixed – Spotlight – Recessed

ACU PS 241000



Wattage	Beam Angle
3W	15° 25°
Colors Temperature	Lumen Output
3000k	126 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto Spot light

Rotatable & Adjustable – Spotlight – Recessed

ACU PTS 241001




Wattage	Beam Angle
6W	24° 36°
Colors Temperature	Lumen Output
3000k	451 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Spot light

Rotatable & Adjustable – Spotlight – Recessed

ACU PTS 241002

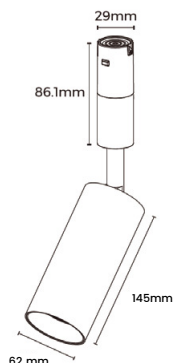

Wattage	Beam Angle
14W	15° 24° 36°
Colors Temperature	Lumen Output
3000k	1057 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto Spot light


Zoomable, Rotatable & Adjustable – Spotlight – Recessed

ACU PTZ 241101

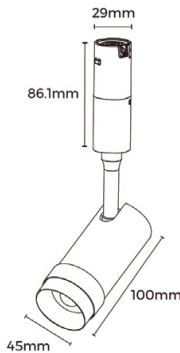

Wattage	Beam Angle
5W	12°-50°
Colors Temperature	Lumen Output
3000k	329 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTZ 241102

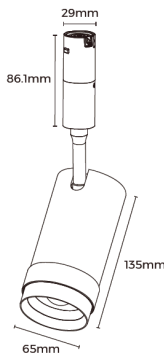

Wattage	Beam Angle
12W	15°-36°
Colors Temperature	Lumen Output
3000k	878 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Round Tube



Asymmetric



Double asymmetric



Wall Washer



Prismatic



Grating




Diffuser



Ponto Linear

Round Tube – Decorative Linear Light – Recessed

ACU PTL 241201

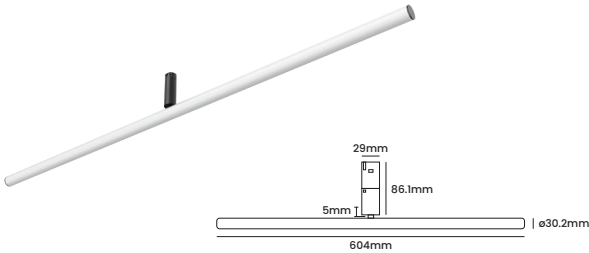


Wattage	Beam Angle
12W	200° x 110°
Colors Temperature	Lumen Output
3000k	1128 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto Linear

Round Tube – Decorative Linear Light – Recessed

ACU PTL 241202

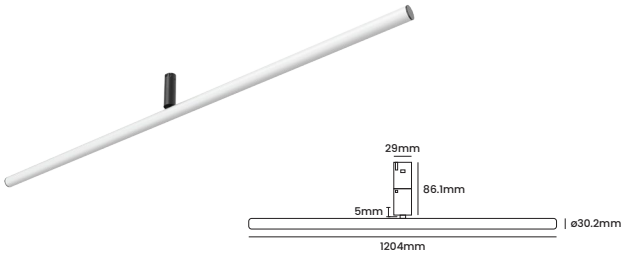


Wattage	Beam Angle
24W	200° x 110°
Colors Temperature	Lumen Output
3000k	2256 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear

Linear – Normal Diffuser –Decorative Linear Light – Suspended

ACU PTL 241301

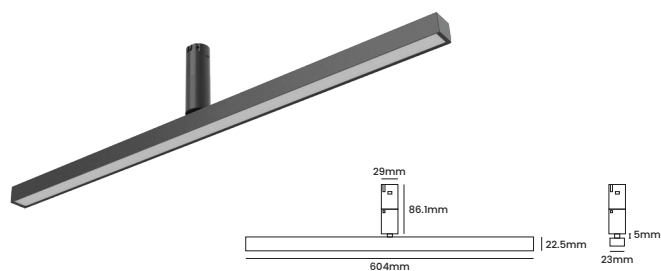


Wattage	Beam Angle
12W	110°
Colors Temperature	Lumen Output
3000k	846 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto Linear

Linear – Normal Diffuser –Decorative Linear Light – Suspended

ACU PTL 241302

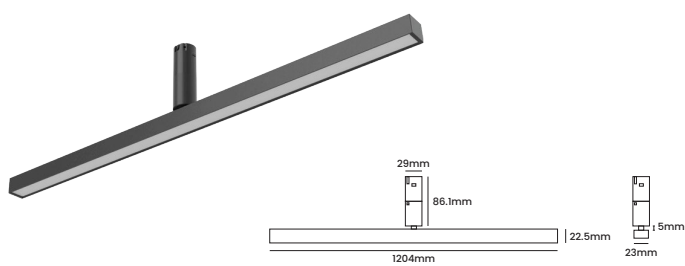


Wattage	Beam Angle
24W	110°
Colors Temperature	Lumen Output
3000k	1692 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear

Linear – Normal Diffuser – Linear Light – Suspended

ACU PTL 241801

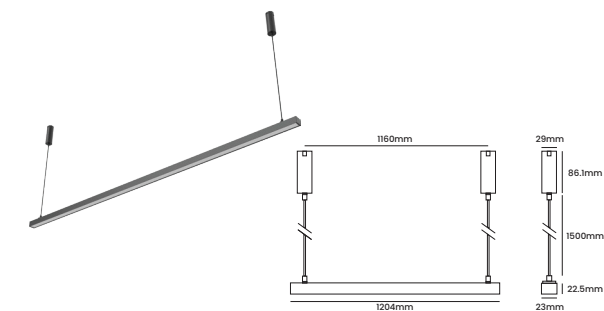


Wattage	Beam Angle
24W	110°
Colors Temperature	Lumen Output
3000k	1692 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear



Linear – Prismatic Diffuser – Rotatable – Recessed

ACU PTL 241401

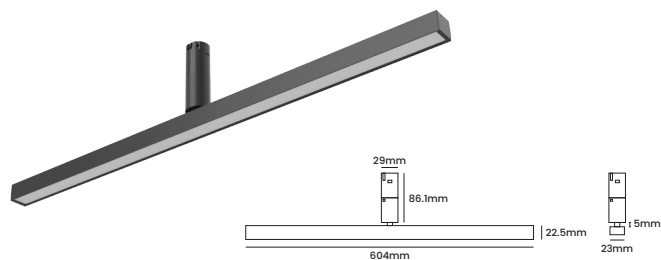

Wattage	Beam Angle
12W	70°
Colors Temperature	Lumen Output
3000k	846 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTL 241402

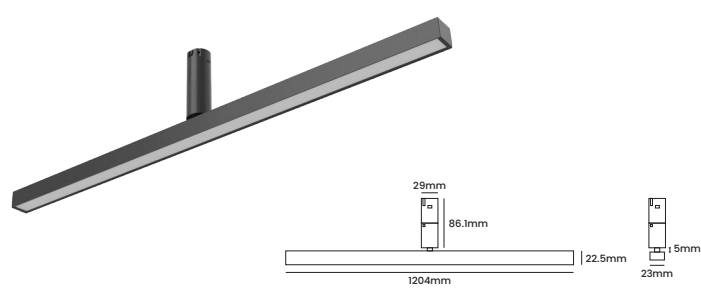


Wattage	Beam Angle
24W	70°
Colors Temperature	Lumen Output
3000k	1692 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear

Linear – Prismatic Diffuser – Linear Light – Suspended

ACU PTL 241901

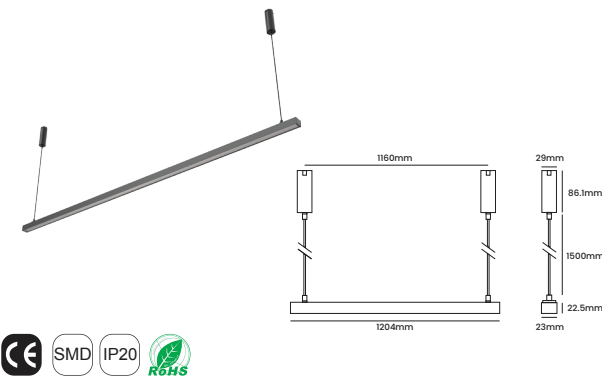

Wattage	Beam Angle
24W	70°
Colors Temperature	Lumen Output
3000k	1800 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto Linear


Linear – Grating Diffuser – Rotatable – Decorative Linear Light – Recessed

ACU PTL 241501

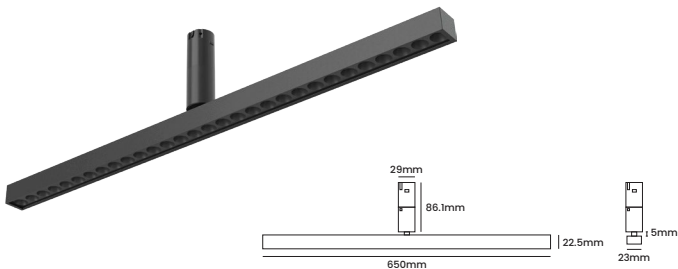

Wattage	Beam Angle
13W	30°
Colors Temperature	Lumen Output
3000k	858 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTL 241502

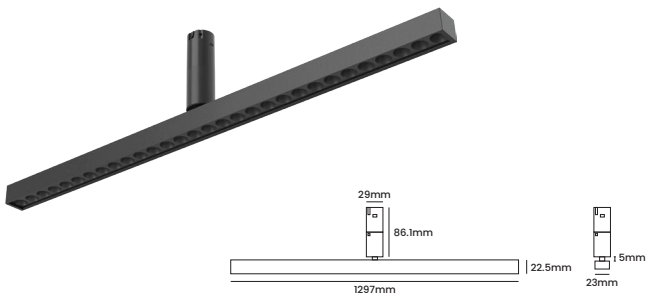


Wattage	Beam Angle
26W	30°
Colors Temperature	Lumen Output
3000k	1716 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear

Linear – Grating Diffuser – Downlight – Suspended

ACU PTL 242001

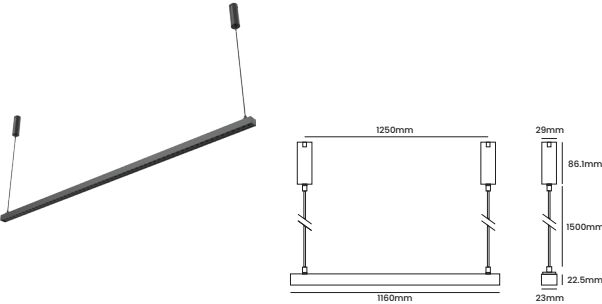



Wattage	Beam Angle
26W	30°
Colors Temperature	Lumen Output
3000k	1710 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear


Linear – Asymmetric Diffuser – Rotatable – Decorative Linear Light – Recessed

ACU PTL 241601

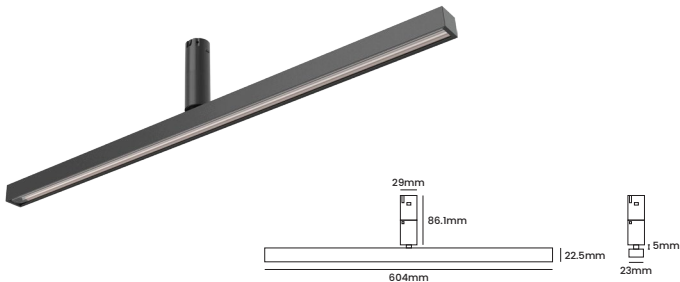

Wattage	Beam Angle
12W	90° x 45° x 15°
Colors Temperature	Lumen Output
3000k	1128 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTL 241602

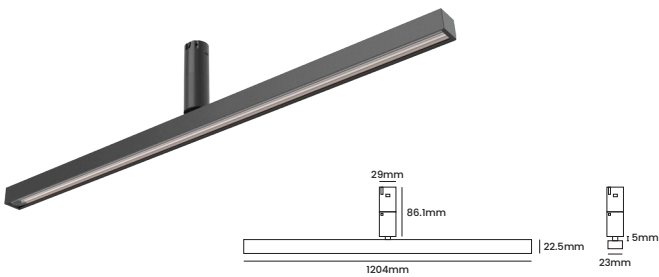


Wattage	Beam Angle
24W	90° x 45° x 15°
Colors Temperature	Lumen Output
3000k	2256 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear


Linear – Double Asymmetric Diffuser – Rotatable –Decorative Linear Light – Recessed

ACU PTL 241701

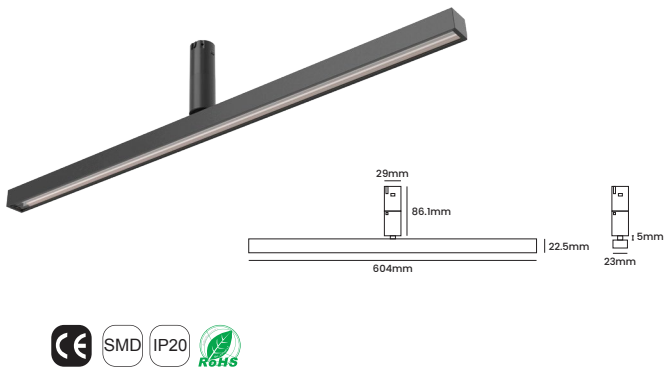

Wattage	Beam Angle
12W	100° x 90° x 15°
Colors Temperature	Lumen Output
3000k	1128 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTL 241702

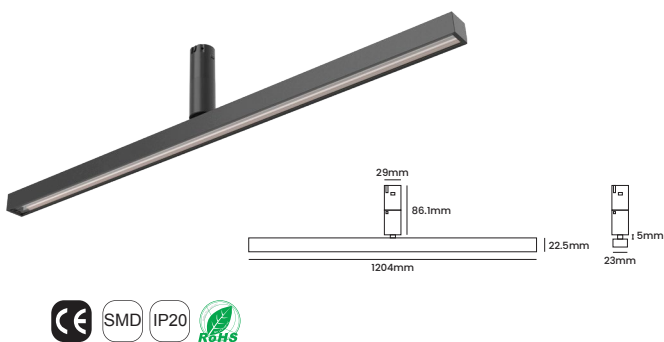

Wattage	Beam Angle
24W	100° x 90° x 15°
Colors Temperature	Lumen Output
3000k	2256 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto Up-Down

Linear - Up-Downlight - Suspended - Normal Diffuser


ACU PTL 242101

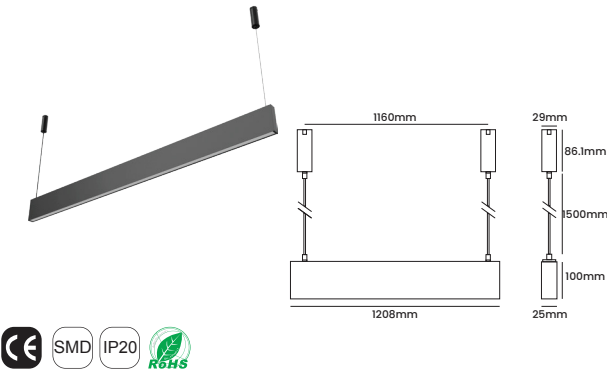

Wattage	Beam Angle
48W	Up: 100° , Down: 100°
Colors Temperature	Lumen Output
3000k	2707 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Prismatic Diffuser

ACU PTL 242201

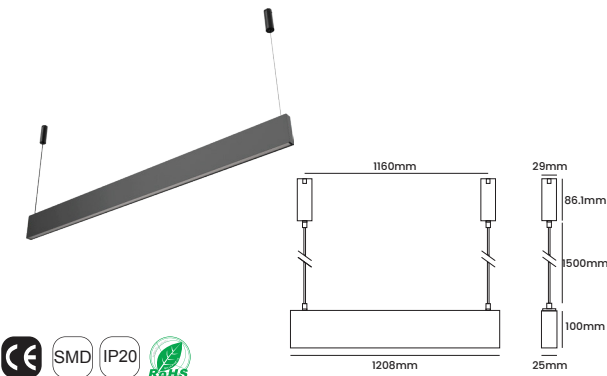


Wattage	Beam Angle
48W	Up: 100° , Down: 100°
Colors Temperature	Lumen Output
3000k	2797 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Up-Down

Linear - Up-Downlight - Suspended - Grating Diffuser

ACU PTL 242301

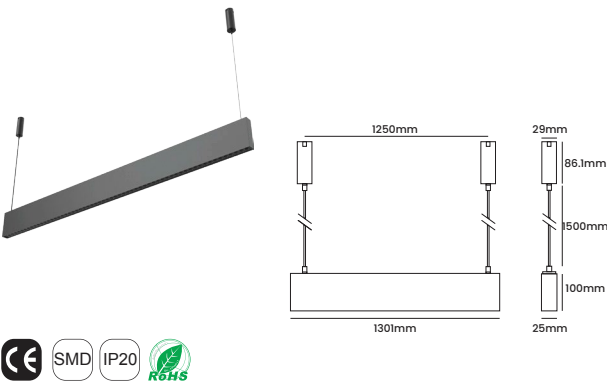

Wattage	Beam Angle
53W	Up:100° , Down: 100°
Colors Temperature	Lumen Output
3000k	2571 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto Linear


Rotatable – Spoon Wall Washer – Recessed

ACU WW 242401

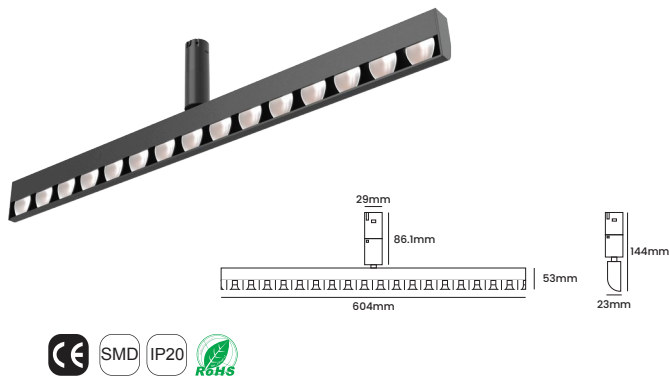

Wattage	Beam Angle
10W	60° X 25° X 73°
Colors Temperature	Lumen Output
3000k	846 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU WW 242402

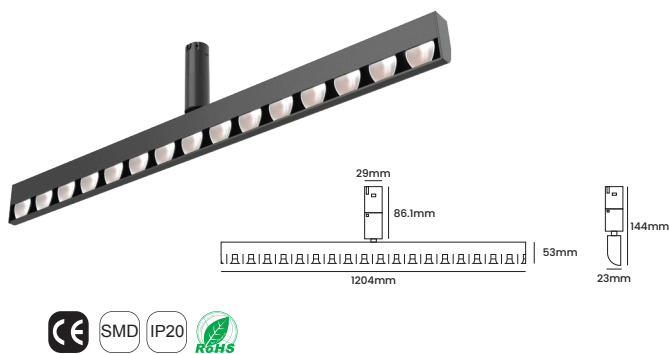

Wattage	Beam Angle
20W	60° X 25° X 73°
Colors Temperature	Lumen Output
3000k	1692 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto


Decorative Round Neon Flex – 2 base suspended

ACU WW 242501

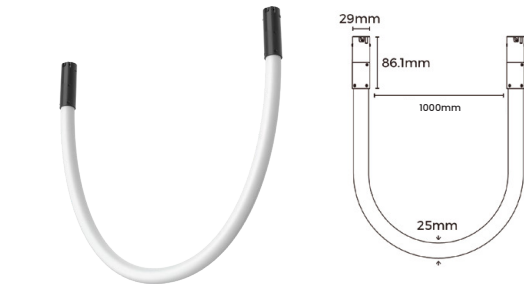

Wattage	Beam Angle
14W	360°
Colors Temperature	Lumen Output
3000k	920 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Silicon Neon Flex

ACU WW 242502

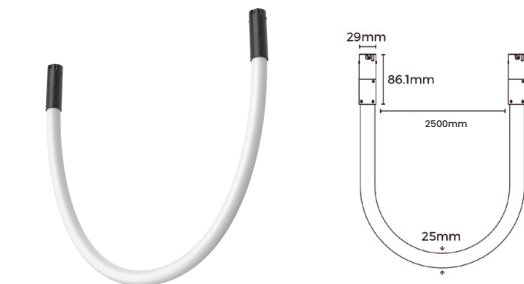



Wattage	Beam Angle
35W	360°
Colors Temperature	Lumen Output
3000k	2300 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Silicon Neon Flex



Ponto

Decorative Round Neon Flex – 2 base suspended

ACU WW 242503

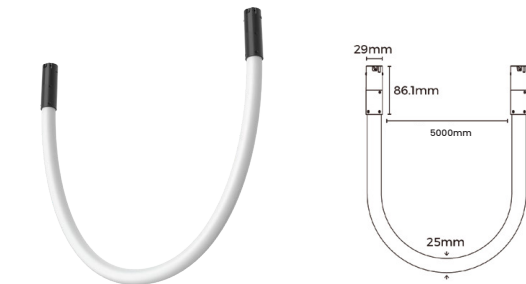


Wattage	Beam Angle
70W	360°
Colors Temperature	Lumen Output
3000k	4600 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Silicon Neon Flex

Ponto

Decorative – Spotlight – Suspended

ACU PTD 242601

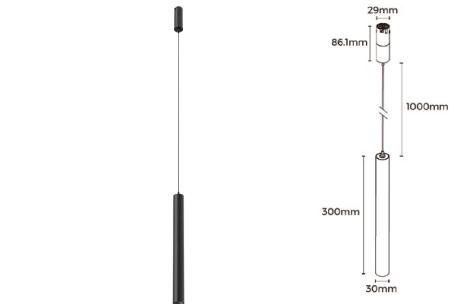


Wattage	Beam Angle
6W	24°
Colors Temperature	Lumen Output
3000k	370 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	☒ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto

Decorative – Spotlight –Suspended

ACU PTD 242602

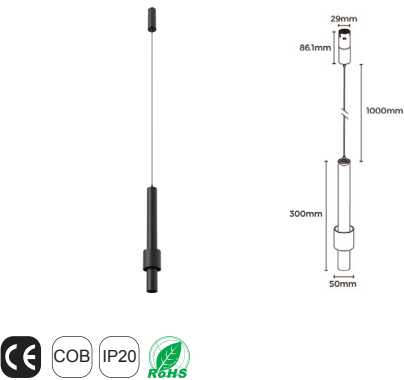


Wattage	Beam Angle
6W	24°
Colors Temperature	Lumen Output
3000k	370 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto

Decorative – Neon Flex – Suspended

ACU PTD 242603

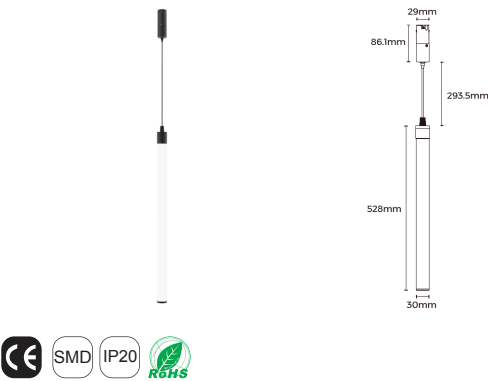

Wattage	Beam Angle
7W	360°
Colors Temperature	Lumen Output
3000k	460 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Silicon Neon Flex






Ponto

Decorative – Ball – Suspended

ACU PTD 242604

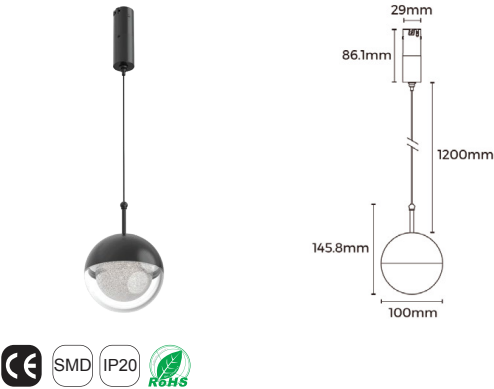


Wattage	Beam Angle
6W	360°
Colors Temperature	Lumen Output
3000k	560 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto

Decorative – Water Drop – Suspended

ACU PTD 242605

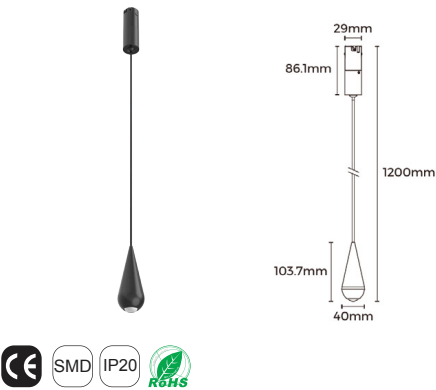

Wattage	Beam Angle
4W	110°
Colors Temperature	Lumen Output
3000k	340 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto

Decorative – Sunset – Pendant

ACU PTD 242606

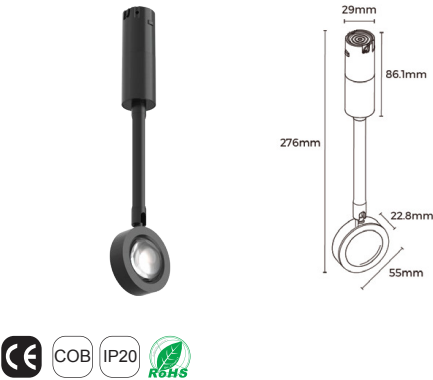

Wattage	Beam Angle
3W	110°
Colors Temperature	Lumen Output
1500 k	170 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum









Instagram Facebook LinkedIn X @ acumenlight

ACUMEN LIGHT EXPERIENCE HOUSE

Jumeirah Lakes Towers, Cluster F, Indigo Icon Tower,
1403-1404 Office, Dubai, United Arab Emirates
Tel. +971 4 557 6933 / Whatsapp. +971 50 159 4577

ACUMEN LIGHT OPERATION CENTER

First Al Khail St, Al Quoz, Al Quoz Industrial Area 3,
Dubai, United Arab Emirates, Tel. +971 4 252 9155