


DOWNLIGHT & SPOTLIGHT

INDOOR LIGHTING

Downlight & Spotlight

A refined collection of fixed and adjustable spotlights and downlights, offered in a wide range of shapes and models, to harmonize seamlessly with diverse spaces and applications. Defined by elegant aesthetics and precise beam control, these lighting solutions enhance architectural details, support design vision, and elevate the overall character of the space.

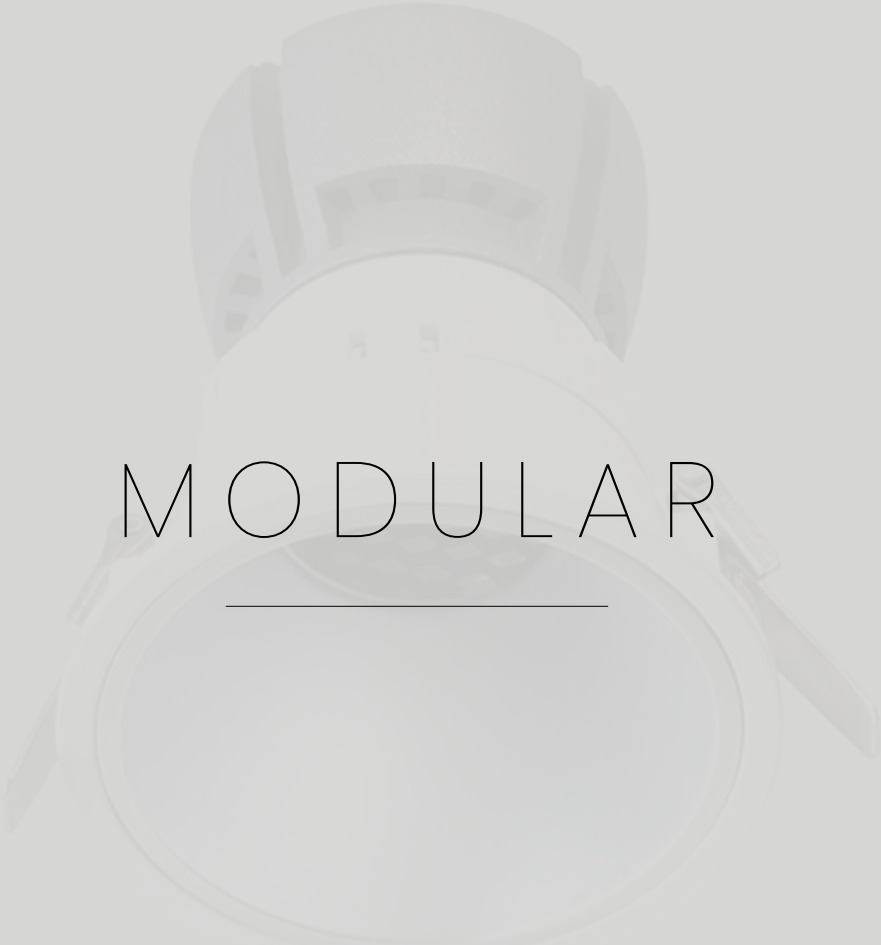

MODULAR

DRIVERS ARE PROVIDED BY **TRIDONIC**

Modular is a recessed LED fixture family designed to serve as ambient, task, or accent lighting. It offers multiple beam angles, frame types, and options, with anti-glare accessories and dimming options to support a more comfortable atmosphere.

Modular

Adjustable - Downlight & Spotlight - Recessed

ACU 01703-09



Wattage	Beam Angle
9W	10°
Colors Temperature	Lumen Output
3000k	750 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	Depending on the frame
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 01703-15



Wattage	Beam Angle
15W	10°
Colors Temperature	Lumen Output
3000k	1100 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	Depending on the frame
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Modular

Adjustable -Downlight & Spotlight - Recessed

ACU 01704-09



Wattage	Beam Angle
9W	15° 25° 40° 60°
Colors Temperature	Lumen Output
3000k	750 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	Depending on the frame
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 01704-15




Wattage	Beam Angle
15W	15° 25° 40° 60°
Colors Temperature	Lumen Output
3000k	1100 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	Depending on the frame
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





THE FRAMES

Stella Adjustable, Hydra Collection, Lynx, Cursa & Solna




All these product frames come in multiple Colors options to match different styles & preferences!

Modular Frames

Colors & Features


ACU 10002 ADJ

Stella Adj



ACU 10005R


Hydra



ACU 10005RW


Hydra

Wall Washer



ACU 10005S



Hydra-Square



ACU 10005SW


Hydra-Square

Wall Washer



ACU 10006R

Lynx




Modular Frames

Colors & Features

ACU 10006RW

Lynx

Wall Washer





ø72mm

ACU 300029


Solna

Timeless



ACU 10007DS

Cursa



△ 154 x 154 mm




LEO-IP

Leo IP is a recessed spotlight family with powder-coated housing and strong heat-sink capability to reduce luminous degradation. Specifically recommended for wet applications such as washrooms.

Leo IP


Fixed – Downlight & Spotlight – Recessed

ACU S 17009



Wattage	Beam Angle
8W	24° 40° 60°
Colors Temperature	Lumen Output
3000k	675 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum

ACU S 17010



Wattage	Beam Angle
15W	15° 24° 38° 60°
Colors Temperature	Lumen Output
3000k	1125 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Leo IP

Adjustable – Downlight & Spotlight – Recessed

ACU S 17010 ADJ

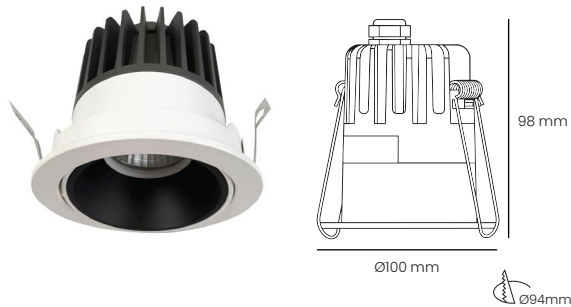

Wattage	Beam Angle
15W	15° 24° 38° 60°
Colors Temperature	Lumen Output
3000k	1125 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Leo IP Mini

Mini Fixed – Spotlight – Recessed

ACU S 17010MR



Wattage	Beam Angle
1.5W	10°
Colors Temperature	Lumen Output
3000k	90 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



NERO

COLLECTION

Nero is a low-glare collection designed to deliver precise, evenly distributed illumination with strong visual comfort. Its small-aperture concept helps improve ambient brightness while maintaining a refined architectural appearance.


NERO FLAT



Nero Flat

Fixed - Downlight & Spotlight - Recessed

ACU FS 251101




Wattage	Beam Angle
5W	15° 36°
Colors Temperature	Lumen Output
3000k	300 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Nero Flat


Fixed – Downlight & Spotlight – Recessed

ACU FS 251102



Wattage	Beam Angle
10W	15° 36°
Colors Temperature	Lumen Output
3000k	600 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU FS 251103



Wattage	Beam Angle
15W	15° 36°
Colors Temperature	Lumen Output
3000k	915 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






NERO CURVED



Nero Curved

Adjustable - Fixed - Downlight & Spotlight - Recessed

ACU CS 251000




Wattage	Beam Angle
5W	25° 40°
Colors Temperature	Lumen Output
3000k	172 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥95	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Nero Curved

Fixed - Downlight & Spotlight - Recessed

ACU CS 251001



Wattage	Beam Angle
5W	15° 36°
Colors Temperature	Lumen Output
3000k	300 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Nero Curved

Fixed - Downlight & Spotlight - Recessed

ACU CS 251002



Wattage	Beam Angle
10W	15° 36°
Colors Temperature	Lumen Output
3000k	600 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU CS 251003



Wattage	Beam Angle
15W	15° 36°
Colors Temperature	Lumen Output
3000k	900 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum






NERO TRIMLESS

Nero Trimless

Fixed - Downlight & Spotlight - Recessed

ACU TS 251201



Wattage	Beam Angle
5W	15° 36°
Colors Temperature	Lumen Output
3000k	350 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Nero Trimless

Fixed - Downlight & Spotlight - Recessed

ACU TS 251202



Wattage	Beam Angle
10W	15° 36°
Colors Temperature	Lumen Output
3000k	700 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥95	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU TS 251203



Wattage	Beam Angle
15W	15° 36°
Colors Temperature	Lumen Output
3000k	1050 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






NERO WALL WASHER




Nero

Adjustable - Wall Washer - Recessed

ACU WW 251301



Wattage	Beam Angle
5W	20° 38°
Colors Temperature	Lumen Output
3000k	120 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥95	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

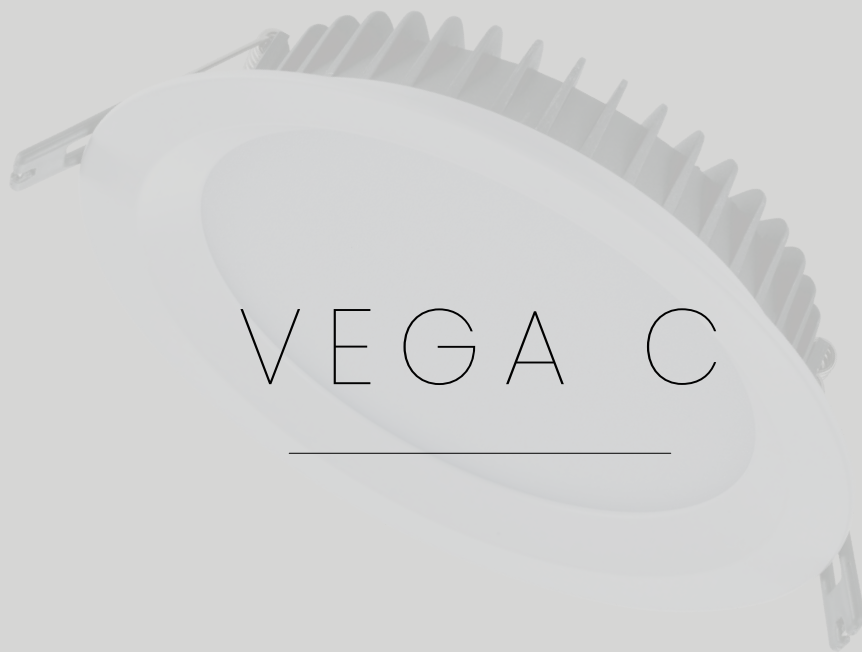


DRIVERS ARE PROVIDED BY **TRIDONIC**

Vega C is an ultra-thin recessed downlight designed to be practical, simple, and easy to install. The catalogue highlights its anti-glare system and frosted acrylic diffuser for visual comfort and strong light transmittance.

Vega C


Fixed - Downlight - Recessed

ACU D 20060



Wattage	Beam Angle
5W	100°
Colors Temperature	Lumen Output
3000k	380 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU D 20061




Wattage	Beam Angle
7W	100°
Colors Temperature	Lumen Output
3000k	550 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Vega C


Fixed - Downlight - Recessed

ACU D 20062



Wattage	Beam Angle
9W	100°
Colors Temperature	Lumen Output
3000k	720 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU D 20063



Wattage	Beam Angle
12W	100°
Colors Temperature	Lumen Output
3000k	960 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Vega C


Fixed - Downlight - Recessed

ACU D 20064



Wattage	Beam Angle
15W	100°
Colors Temperature	Lumen Output
3000k	1200 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU D 20065




Wattage	Beam Angle
20W	100°
Colors Temperature	Lumen Output
3000k	1600 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Vega C


Fixed - Downlight - Recessed

ACU D 20066



Wattage	Beam Angle
25W	100°
Colors Temperature	Lumen Output
3000k	2000 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU D 20067



Wattage	Beam Angle
30W	100°
Colors Temperature	Lumen Output
3000k	2400 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






DRIVERS ARE PROVIDED BY **TRIDONIC**

Mega is a recessed downlight family in the stronger-output tier of the simple anti-glare downlight category, designed for powerful and clean general illumination.

Mega


Fixed - Downlight - Recessed

ACU DR 240001



Wattage	Beam Angle
15W	85°
Colors Temperature	Lumen Output
3000K	1423 LM
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached External Driver)	Powder Coated Aluminum

ACU DR 240002



Wattage	Beam Angle
33W	85°
Colors Temperature	Lumen Output
3000K	3532 LM
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached External Driver)	Powder Coated Aluminum






Mega


Fixed – Downlight – Surface Mounted

ACU DSM 240003



Wattage	Beam Angle
8W	80°
Colors Temperature	Lumen Output
3000K	635 LM
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	☒ BW ☒ WG ☐ WS
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU DSM 240004




Wattage	Beam Angle
15W	80°
Colors Temperature	Lumen Output
3000K	1139 LM
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	☒ BW ☒ WG ☐ WS
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Mega


Fixed – Downlight – Surface Mounted

ACU DSM 240005



Wattage	Beam Angle
30W	110°
Colors Temperature	Lumen Output
3000K	2746 LM
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	☒ BW ☒ WG ☐ WS
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU DSM 240006



Wattage	Beam Angle
120W	110°
Colors Temperature	Lumen Output
3000K	11781 LM
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	☒ BW ☒ WG ☐ WS
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum







PAVO


DRIVERS ARE PROVIDED BY **TRIDONIC**

Pavo is positioned as a family specialized for residential and hospitality applications, with high efficiency, multiple beam angles, and several wattage options. The catalogue highlights adjustability as the family's main character, supporting the illumination of different surfaces from one source.

Pavo


Adjustable - Accent Light - Recessed

ACU 200901

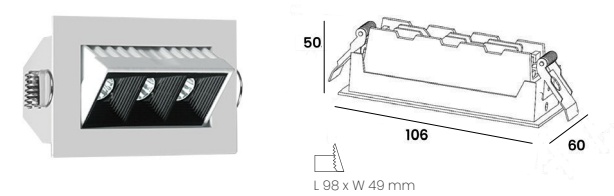

Wattage	Beam Angle
3x2 W	12° 34° 48°
Colors Temperature	Lumen Output
3000k	450 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 200902

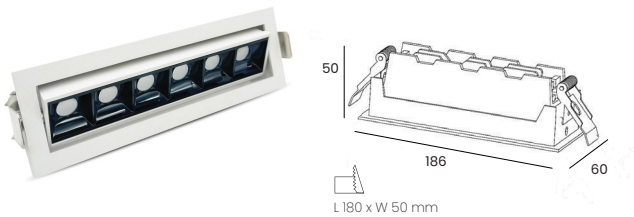


Wattage	Beam Angle
6x2 W	12° 34° 48°
Colors Temperature	Lumen Output
3000k	900 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Pavo


Fixed -Wall Washer – Recessed

ACU 200903



Wattage	Beam Angle
5x2 W	100°
Colors Temperature	Lumen Output
3000k	750 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 200904



Wattage	Beam Angle
10x2 W	100°
Colors Temperature	Lumen Output
3000k	1500 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Pavo

Fixed -Wall Washer - Recessed

ACU 200905




Wattage	Beam Angle
15x2 W	100°
Colors Temperature	Lumen Output
3000k	2250 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Pavo

Fixed - Downlight & Spotlight - Recessed

ACU S18104




Wattage	Beam Angle
2 W	12° 30°
Colors Temperature	Lumen Output
3000k	185 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Pavo


Fixed - Downlight & Spotlight - Recessed

ACU S 18105



Wattage	Beam Angle
2x2 W	12° 30°
Colors Temperature	Lumen Output
3000k	370 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU S 18106



Wattage	Beam Angle
5x2 W	12° 30°
Colors Temperature	Lumen Output
3000k	855 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Pavo



Fixed – Downlight & Spotlight – Recessed

ACU S 18107

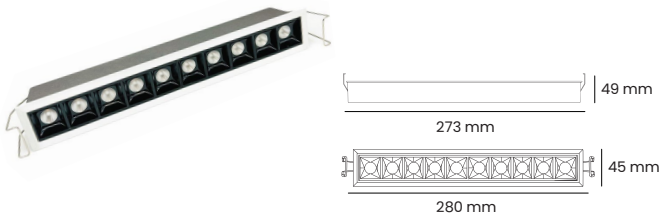

Wattage	Beam Angle
10x2 W	12° 30°
Colors Temperature	Lumen Output
3000k	1600 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU S 18108

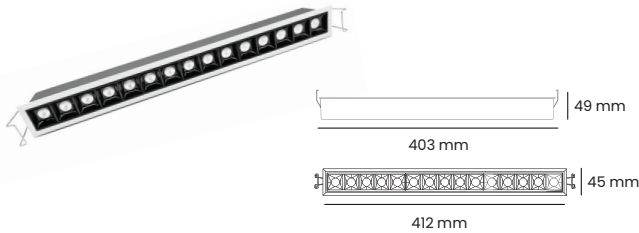

Wattage	Beam Angle
15x2 W	12° 30°
Colors Temperature	Lumen Output
3000k	2400 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





MENSA PLUS

C O L L E C T I O N

Mensa Plus is a spotlight family organized across recessed, surface-mounted, and track-mounted executions. The locked structure shows it as a system of focused lighting options built around spotlight performance and mounting flexibility.

Mensa Plus

Rotatable & Adjustable - Downlight & Spotlight - Recessed

ACU RL 245010



Wattage	Beam Angle
7W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	531 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU RL 245011




Wattage	Beam Angle
15W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1272 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Mensa Plus

Rotatable & Adjustable – Downlight & Spotlight – Recessed

ACU RL 245012



Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2117 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Mensa Plus


Rotatable & Adjustable – Downlight & Spotlight – Surface Mounted

ACU SML 245510

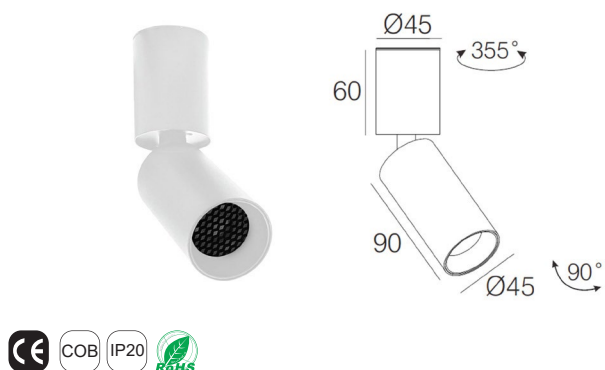

Wattage	Beam Angle
7W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	531 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU SML 245511

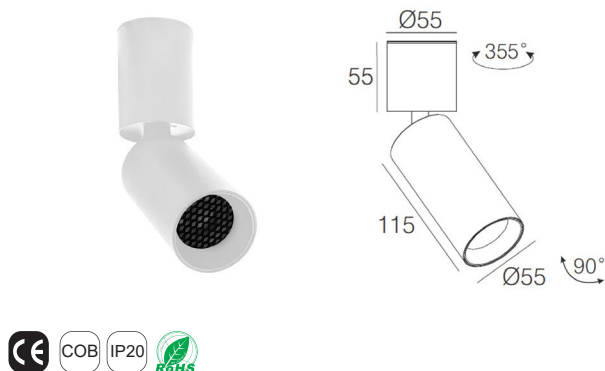


Wattage	Beam Angle
15W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1272 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

Mensa Plus

Rotatable & Adjustable – Downlight & Spotlight – Surface Mounted

ACU SML 245512




Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2117 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Mensa Plus


Rotatable & Adjustable – Spotlight & Downlight – Track Mounted

ACU TL 244010

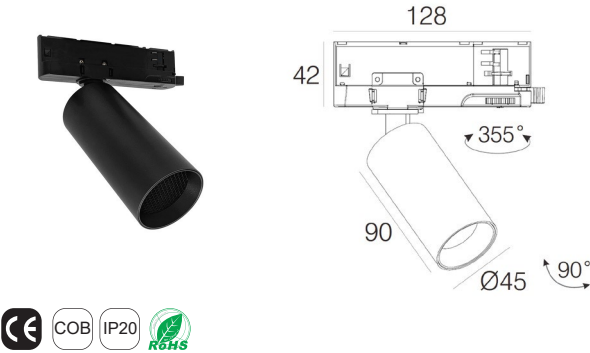

Wattage	Beam Angle
7W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	531 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU TL 244011

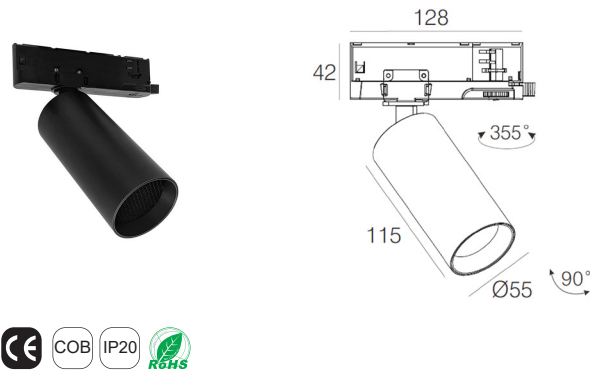


Wattage	Beam Angle
15W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1272 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Mensa Plus

Rotatable & Adjustable – Spotlight & Downlight – Track Mounted

ACU TL 244012

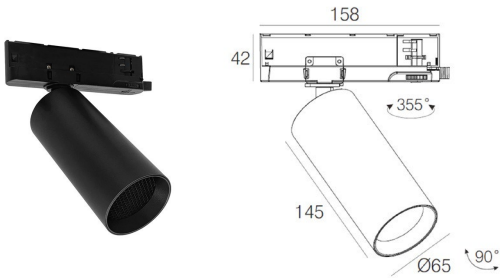

Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2117 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum






Bianca is a spotlight family designed for refined accent lighting that highlights art, textures, and architectural details. It combines a decorative sensibility with focused technical performance.

Bianca

Rotatable & Adjustable – Spotlight & Downlight – Surface Mounted

ACU 200101




Wattage	Beam Angle
13W	12° 25° 38°
Colors Temperature	Lumen Output
3000k	1079 Lm
Installation	Rated Life Hours
Surface mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Bianca

Rotatable & Adjustable – Spotlight & Downlight – Recessed

ACU 200102



Wattage	Beam Angle
13W	12° 25° 38°
Colors Temperature	Lumen Output
3000k	1079 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





PULSAR


Mini Spotlight

Pulsar is a mini spotlight family intended for discreet but powerful accent lighting. The catalogue positions it as suitable for enhancing textures, artworks, and architectural features with subtle sophistication.

Pulsar


Rotatable & Adjustable – Spotlight – Recessed

ACU MS 264010



Wattage	Beam Angle
1x3 W	15° 24°
Colors Temperature	Lumen Output
3000k	143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU MS 264011

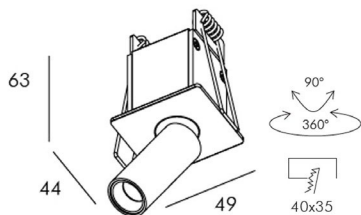

Wattage	Beam Angle
1x3 W	15° 24°
Colors Temperature	Lumen Output
3000k	143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Pulsar

Rotatable & Adjustable – Spotlight – Recessed

ACU MS 264012

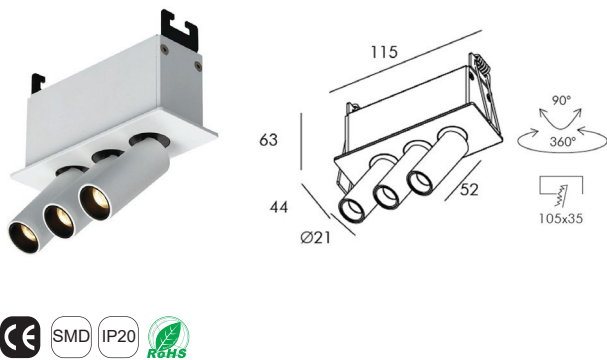

Wattage	Beam Angle
3x2 W	15° 24°
Colors Temperature	Lumen Output
3000k	413 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum







Peek is a compact recessed adjustable spotlight series. The catalogue pages show a mix of source types across the merged codes, all aimed at directional accent lighting in a small format.

Peek


Adjustable - Spotlight - Recessed

ACU 230001



Wattage	Beam Angle
3W	15° 24°
Colors Temperature	Lumen Output
3000k	148 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 230002



Wattage	Beam Angle
3W	15°-24°
Colors Temperature	Lumen Output
3000k	65 - 78 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





Peek

Adjustable - Spotlight - Recessed

ACU 230003




Wattage	Beam Angle
3W	15° 24°
Colors Temperature	Lumen Output
3000k	108 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Peek

Adjustable - Spot light - Recessed - Zoomable

ACU 230004

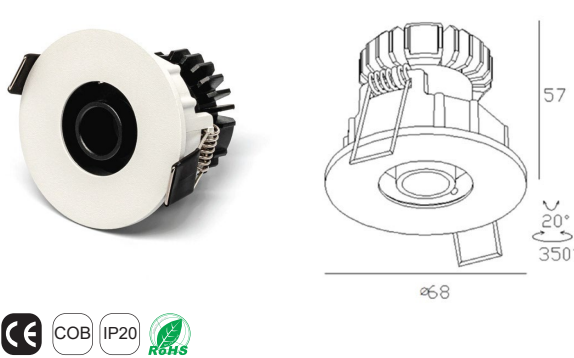


Wattage	Beam Angle
3W	8°
Colors Temperature	Lumen Output
3000k	128 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Peek

Adjustable – Spotlight – Recessed

ACU 230005

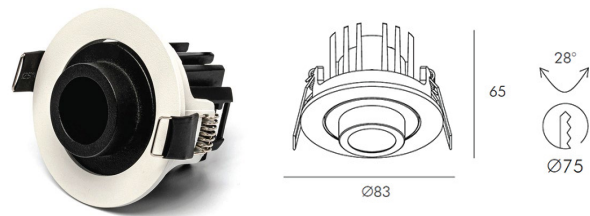


Wattage	Beam Angle
5W	5°
Colors Temperature	Lumen Output
3000k	143 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Ray is an adjustable recessed spotlight series offered in multiple frame expressions, including round and square visual options, while keeping a focused accent-lighting role.

ACU 232001




Wattage	Beam Angle
7W	15° 35°
Colors Temperature	Lumen Output
3000k	378 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 232002




Wattage	Beam Angle
12W	15° 35°
Colors Temperature	Lumen Output
3000k	700 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 232003




Wattage	Beam Angle
12W	15° 35°
Colors Temperature	Lumen Output
3000k	770 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 232004

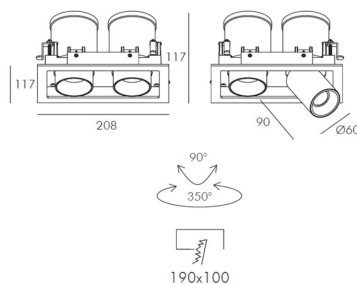

Wattage	Beam Angle
2x12W	15° 35°
Colors Temperature	Lumen Output
3000k	1455 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 232005

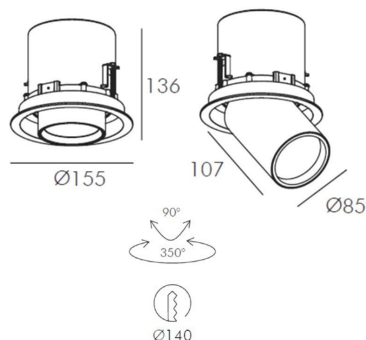

Wattage	Beam Angle
25W	15° 45°
Colors Temperature	Lumen Output
3000k	1780 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum







SPARK

COLLECTION


Spark is an adjustable spotlight series offered in multiple frame expressions, including trimless, round, square, rectangular, and stadium-like forms. It is a broader family built around focused recessed accent lighting.



Spark

Adjustable – Downlight & Spotlight – Recessed

ACU 231001




Wattage	Beam Angle
1x7W	20° 30°
Colors Temperature	Lumen Output
3000k	358 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Spark

Adjustable – Downlight & Spotlight – Recessed – Trimless

ACU 231002




Wattage	Beam Angle
1x7W	20° 30°
Colors Temperature	Lumen Output
3000k	358 Lm
Installation	Rated Life Hours
Trimless Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Spark

Adjustable – Downlight & Spotlight – Recessed – Trimless

ACU 231003




Wattage	Beam Angle
2x7W	20° 30°
Colors Temperature	Lumen Output
3000k	744 Lm
Installation	Rated Life Hours
Trim-Less Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Spark

Adjustable – Downlight & Spotlight – Recessed

ACU 231004




Wattage	Beam Angle
1x7W	20° 30°
Colors Temperature	Lumen Output
3000k	363 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Spark


Adjustable – Downlight & Spotlight – Recessed

ACU 231005



Wattage	Beam Angle
2x7W	20° 30°
Colors Temperature	Lumen Output
3000k	803 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 231006




Wattage	Beam Angle
1x10W	20° 35°
Colors Temperature	Lumen Output
3000k	612 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Spark


Adjustable – Downlight & Spotlight – Recessed

ACU 231007

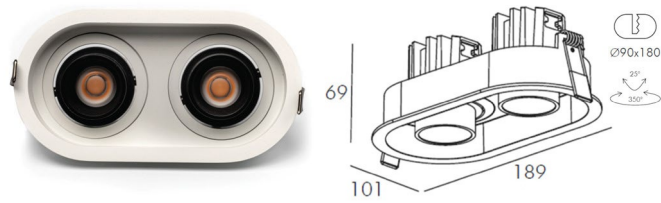

Wattage	Beam Angle
2x10W	20° 35°
Colors Temperature	Lumen Output
3000k	1143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 231008

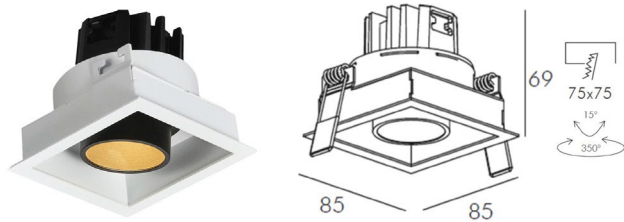


Wattage	Beam Angle
1x10W	20° 35°
Colors Temperature	Lumen Output
3000k	612 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Spark


Adjustable – Downlight & Spotlight – Recessed

ACU 231009



Wattage	Beam Angle
2x10W	20° 35°
Colors Temperature	Lumen Output
3000k	1143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 231010



Wattage	Beam Angle
3x10W	20° 35°
Colors Temperature	Lumen Output
3000k	1747 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Velora is a clean surface-mounted downlight for residential and commercial spaces, designed to provide comfortable illumination through a simple architectural form. Its minimal profile integrates naturally into interiors while maintaining a refined ceiling presence.

Velora Cubic


Fixed – Downlight & Spotlight – Surface Mounted

ACU DSM 261010



Wattage	Beam Angle
7 W	15° 24° 35°
Colors Temperature	Lumen Output
3000k	440 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU DSM 261011



Wattage	Beam Angle
12 W	15° 24° 35°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum






Velora Cubic

Fixed – Downlight & Spotlight – Surface Mounted

ACU DSM 261012



Wattage	Beam Angle
18 W	15° 24° 35°
Colors Temperature	Lumen Output
3000k	1280 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum





VELORA C


COLLECTION

Velora C is a surface-mounted downlight with an elegant cylindrical silhouette, designed to deliver soft, balanced illumination through a defined exterior. Its rounded body gives the fixture a cleaner look while staying minimal, making it suitable for residential and commercial interiors.

Velora Cylindric


Fixed – Downlight & Spotlight – Surface Mounted

ACU DSM 261015



Wattage	Beam Angle
8 W	15° 24° 36°
Colors Temperature	Lumen Output
3000k	720 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU DSM 261016



Wattage	Beam Angle
12 W	15° 24° 36°
Colors Temperature	Lumen Output
3000k	1080 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum









Step is a recessed fixture positioned more around decorative lighting effect than raw output quantity, making it useful where subtle effect and guidance matter.

Step

Fixed – Floor Wash – Recessed

ACU 237003



Wattage	Beam Angle
3 W	110°
Colors Temperature	Lumen Output
3000k	Decorative Lumen Effect
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum + Iron + PC

3 Mode Switch:

1. Always on
2. Infrared Motion Sensing
3. Infrared + Light Sensing



ACUMEN

📷 📺 📱 📞 @ acumenlight

ACUMEN LIGHT EXPERIENCE HOUSE

Jumeirah Lakes Towers, Cluster F, Indigo Icon Tower,
1403-1404 Office, Dubai, United Arab Emirates
Tel. +971 4 557 6933 / Whatsapp. +971 50 159 4577

ACUMEN LIGHT OPERATION CENTER

First Al Khail St, Al Quoz, Al Quoz Industrial Area 3,
Dubai, United Arab Emirates, Tel. +971 4 252 9155