

INDOOR LINEAR

INDOOR LIGHTING



Indoor Linear

Indoor Linear is a modern linear-light family designed to provide uniform illumination, high visual comfort, and an elegant form. It appears in multiple optical/diffuser expressions and installation directions.

Surface Mounted & Suspended

INDOOR LINEAR

HONEYCOMB

DIFFUSER

Indoor Linear

Honeycomb Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240101SM



Wattage	Beam Angle
34W	60°x75°
Colors Temperature	Lumen Output
3000k	2085 Lm
4000k	2195 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU IL 240102SM



Wattage	Beam Angle
46W	60°x75°
Colors Temperature	Lumen Output
3000k	2820 Lm
4000k	2965 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum





Indoor Linear

Honeycomb Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240103SM



Wattage	Beam Angle
51W	60°x75°
Colors Temperature	Lumen Output
3000k	3125 Lm
4000k	3290 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU IL 240104SM



Wattage	Beam Angle
68W	60°x75°
Colors Temperature	Lumen Output
3000k	4165 Lm
4000k	4385 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

LOUVER


DIFFUSER



Indoor Linear


Louver Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240201SM

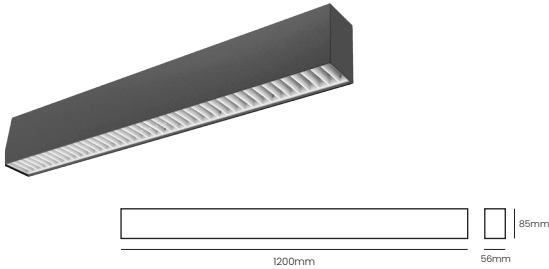

Wattage	Beam Angle
34W	72°
Colors Temperature	Lumen Output
3000k	1760 Lm
4000k	1890 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU IL 240202SM

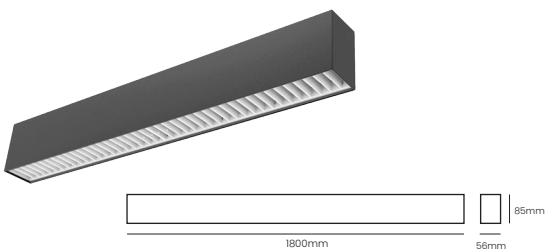


Wattage	Beam Angle
51W	72°
Colors Temperature	Lumen Output
3000k	2690 Lm
4000k	2830 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

Indoor Linear

Louver Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240203SM



Wattage	Beam Angle
68W	72°
Colors Temperature	Lumen Output
3000k	3550 Lm
4000k	3770 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



PRISMATIC


DIFFUSER



Indoor Linear

Prismatic Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240301SM

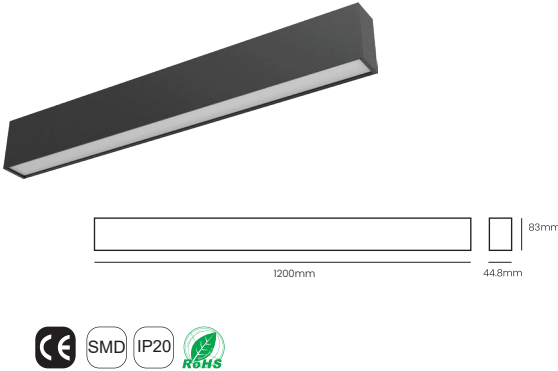

Wattage	Beam Angle
28W	65°x70°
Colors Temperature	Lumen Output
3000k	2745 Lm
4000k	2890 Lm
Installation	Rated Life Hours
Surface Mounted - Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU IL 240302SM




Wattage	Beam Angle
34W	65°x70°
Colors Temperature	Lumen Output
3000k	3335 Lm
4000k	3510 Lm
Installation	Rated Life Hours
Surface Mounted - Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

Indoor Linear


Prismatic Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240303SM

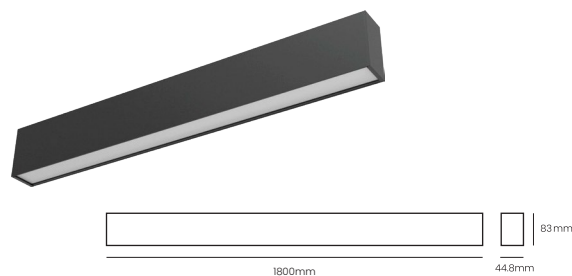

Wattage	Beam Angle
40W	65°x70°
Colors Temperature	Lumen Output
3000k	3920 Lm
4000k	4130 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



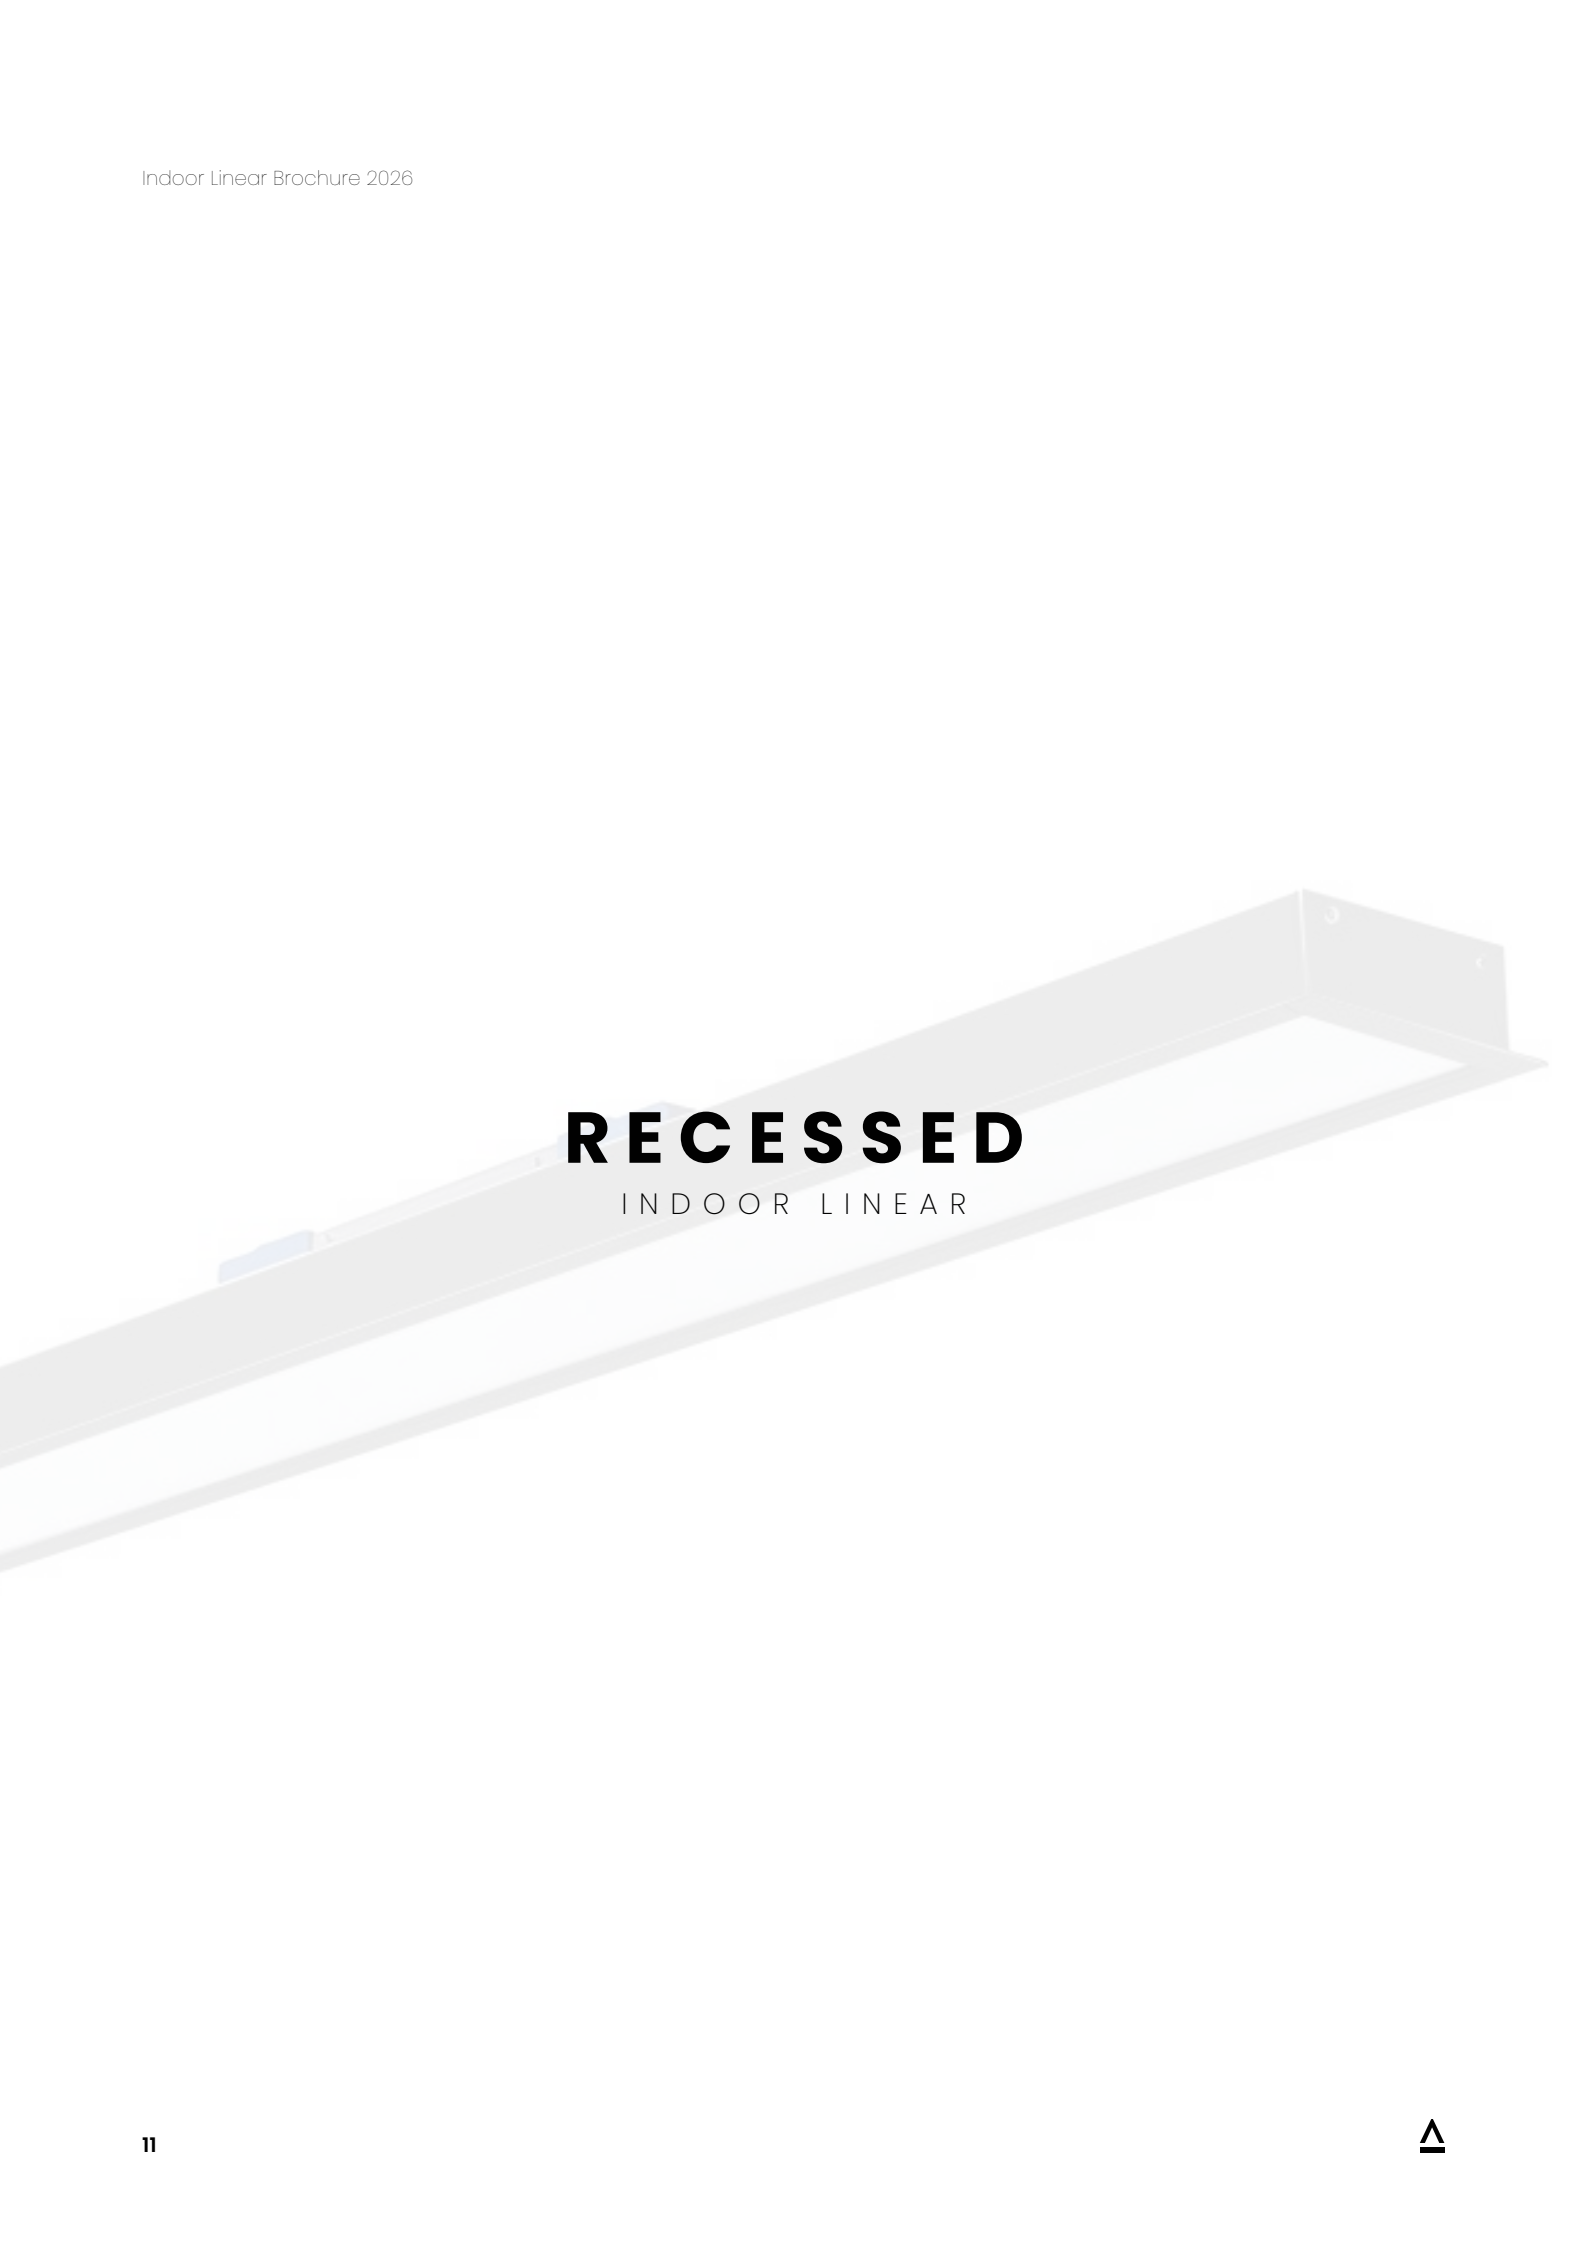

RECESSED


INDOOR LINEAR



Indoor Linear


Fixed – Linear Light – Recessed

ACU IL 240401R



Wattage	Beam Angle
19W	110°
Colors Temperature	Lumen Output
3000k	1900 Lm
4000k	2020 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU IL 240402R




Wattage	Beam Angle
27W	110°
Colors Temperature	Lumen Output
3000k	2700 Lm
4000k	2870 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Indoor Linear


Fixed – Linear Light – Recessed

ACU IL 240403R

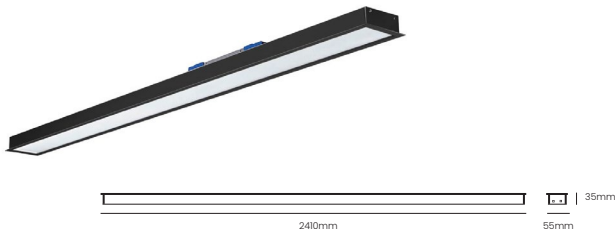

Wattage	Beam Angle
38W	110°
Colors Temperature	Lumen Output
3000k	3800 Lm
4000k	4040 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU IL 240404R

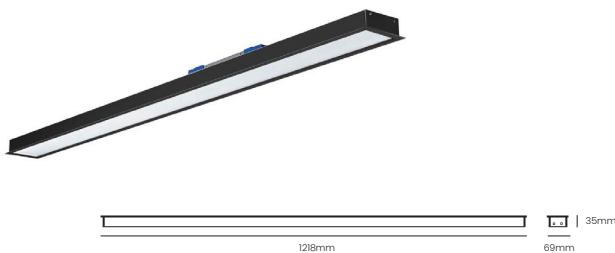


Wattage	Beam Angle
27W	110°
Colors Temperature	Lumen Output
3000k	2800 Lm
4000k	2980 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Indoor Linear


Fixed – Linear Light – Recessed

ACU IL 240405R

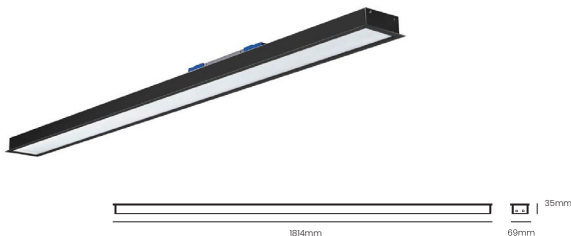

Wattage	Beam Angle
38W	110°
Colors Temperature	Lumen Output
3000k	3950 Lm
4000k	4200 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU IL 240406R

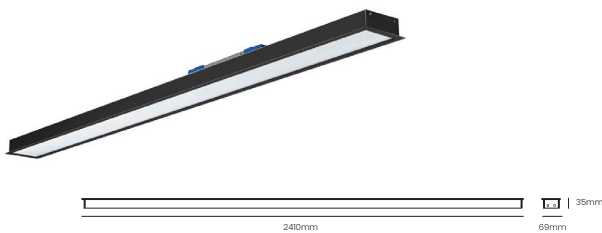


Wattage	Beam Angle
53W	110°
Colors Temperature	Lumen Output
3000k	5510 Lm
4000k	5860 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Indoor Linear


Fixed – Linear Light – Recessed

ACU IL 240407R

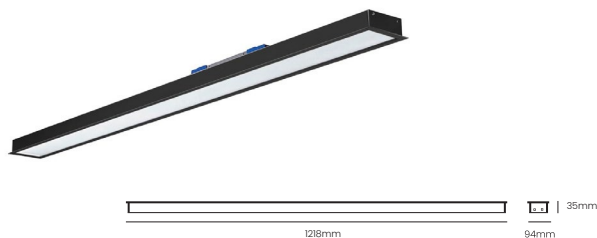

Wattage	Beam Angle
38W	110°
Colors Temperature	Lumen Output
3000k	3950 Lm
4000k	4200 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU IL 240408R

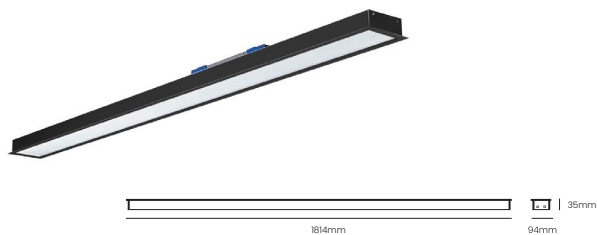


Wattage	Beam Angle
60W	110°
Colors Temperature	Lumen Output
3000k	6230 Lm
4000k	6630 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Indoor Linear

Fixed – Linear Light – Recessed

ACU IL 240409R



Wattage	Beam Angle
75W	110°
Colors Temperature	Lumen Output
3000k	7790 Lm
4000k	8290 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





ACUMEN

📷 📺 📱 📞 @ acumenlight

ACUMEN LIGHT EXPERIENCE HOUSE

Jumeirah Lakes Towers, Cluster F, Indigo Icon Tower,
1403-1404 Office, Dubai, United Arab Emirates
Tel. +971 4 557 6933 / Whatsapp. +971 50 159 4577

ACUMEN LIGHT OPERATION CENTER

First Al Khail St, Al Quoz, Al Quoz Industrial Area 3,
Dubai, United Arab Emirates, Tel. +971 4 252 9155