

PONTO

INDOOR LIGHTING




Ponto

Ponto is introduced as a unified-base system that combines general, accent, and decorative lighting in one platform with easy installation. It spans architectural & decorative expressions under one family.

Ponto Base

Trimless

ACU BS 240000T

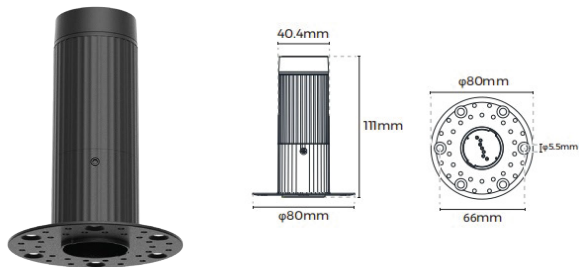


Wattage	Rated Current
150W	3A
CutOut	Maximum load
φ45mm	8Kg
Installation	Colors
Trimless Recessed	■ Black □ White
Materials	Input voltage
Powder Coated Aluminum	24V DC (Via the External Driver)

Ponto Base

Recessed

ACU BS 240000R

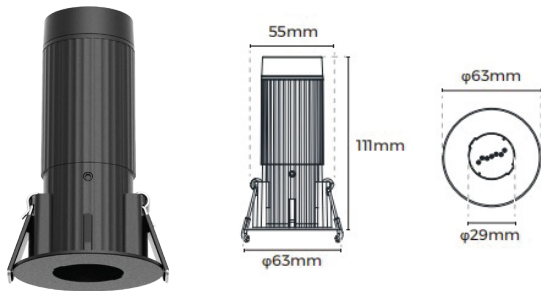

Wattage	Rated Current
150W	3A
CutOut	Maximum load
φ55mm	1Kg
Installation	Colors
Recessed	■ Black □ White
Materials	Input voltage
Powder Coated Aluminum	24V DC (Via the External Driver)



Ponto Spot light

Fixed – Spotlight – Recessed

ACU PS 241000



Wattage	Beam Angle
3W	15° 25°
Colors Temperature	Lumen Output
3000k	126 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto Spot light

Rotatable & Adjustable – Spotlight – Recessed

ACU PTS 241001




Wattage	Beam Angle
6W	24° 36°
Colors Temperature	Lumen Output
3000k	451 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto Spot light

Rotatable & Adjustable – Spotlight – Recessed

ACU PTS 241002

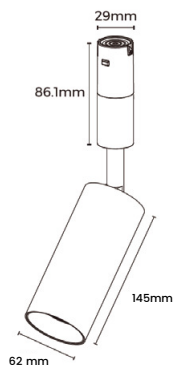

Wattage	Beam Angle
14W	15° 24° 36°
Colors Temperature	Lumen Output
3000k	1057 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto Spot light


Zoomable, Rotatable & Adjustable – Spotlight – Recessed

ACU PTZ 241101

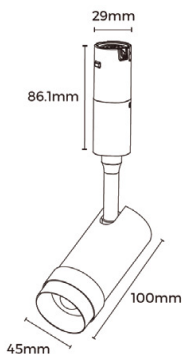

Wattage	Beam Angle
5W	12°-50°
Colors Temperature	Lumen Output
3000k	329 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTZ 241102

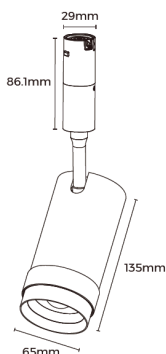

Wattage	Beam Angle
12W	15°-36°
Colors Temperature	Lumen Output
3000k	878 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Round Tube



Asymmetric



Double asymmetric



Wall Washer



Prismatic



Grating




Diffuser



Ponto Linear

Round Tube – Decorative Linear Light – Recessed

ACU PTL 241201

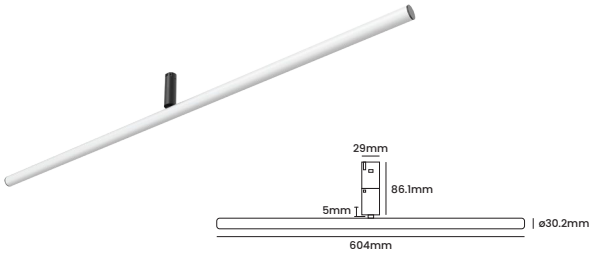


Wattage	Beam Angle
12W	200° x 110°
Colors Temperature	Lumen Output
3000k	1128 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto Linear

Round Tube – Decorative Linear Light – Recessed

ACU PTL 241202

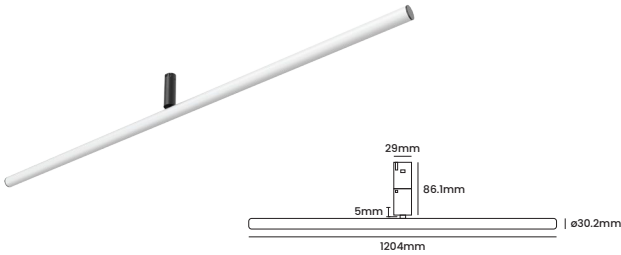


Wattage	Beam Angle
24W	200° x 110°
Colors Temperature	Lumen Output
3000k	2256 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto Linear

Linear – Normal Diffuser –Decorative Linear Light – Suspended

ACU PTL 241301

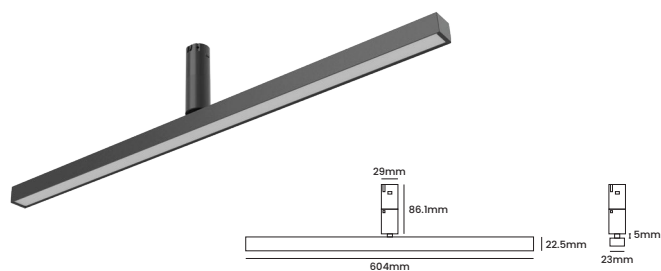


Wattage	Beam Angle
12W	110°
Colors Temperature	Lumen Output
3000k	846 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto Linear

Linear – Normal Diffuser –Decorative Linear Light – Suspended

ACU PTL 241302

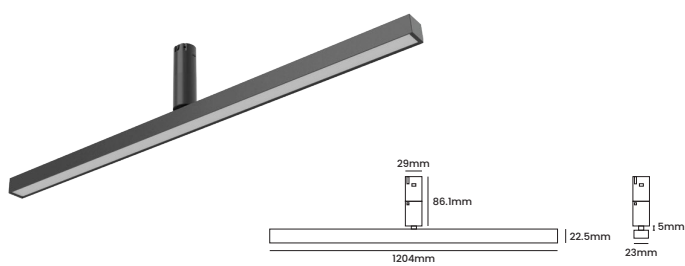


Wattage	Beam Angle
24W	110°
Colors Temperature	Lumen Output
3000k	1692 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear

Linear – Normal Diffuser – Linear Light – Suspended

ACU PTL 241801

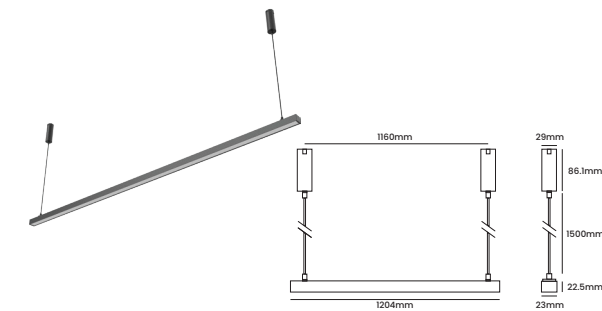


Wattage	Beam Angle
24W	110°
Colors Temperature	Lumen Output
3000k	1692 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear


Linear – Prismatic Diffuser – Rotatable – Recessed

ACU PTL 241401

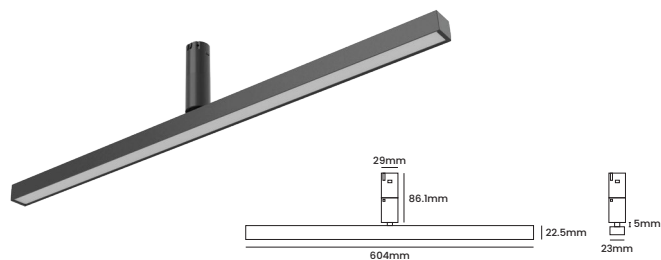

Wattage	Beam Angle
12W	70°
Colors Temperature	Lumen Output
3000k	846 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTL 241402

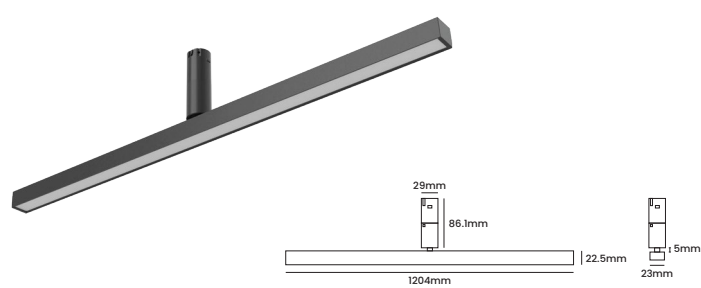


Wattage	Beam Angle
24W	70°
Colors Temperature	Lumen Output
3000k	1692 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear

Linear – Prismatic Diffuser – Linear Light – Suspended

ACU PTL 241901

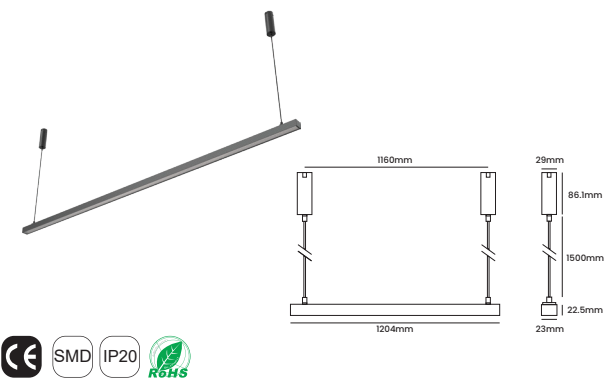

Wattage	Beam Angle
24W	70°
Colors Temperature	Lumen Output
3000k	1800 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto Linear


Linear – Grating Diffuser – Rotatable – Decorative Linear Light – Recessed

ACU PTL 241501

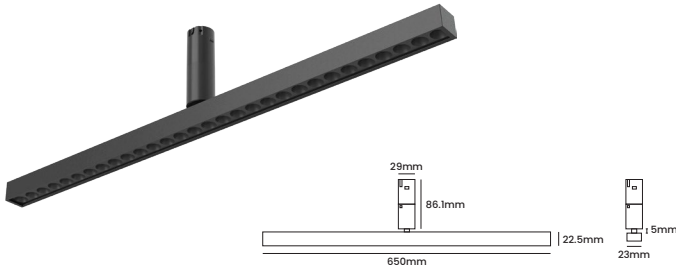

Wattage	Beam Angle
13W	30°
Colors Temperature	Lumen Output
3000k	858 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTL 241502

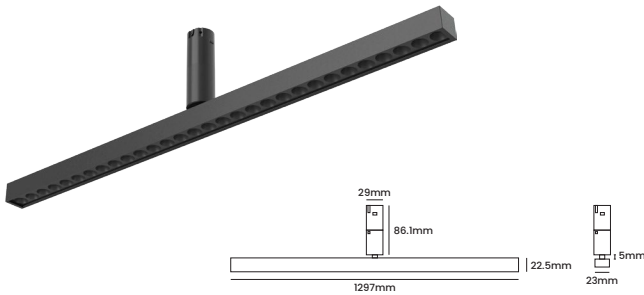


Wattage	Beam Angle
26W	30°
Colors Temperature	Lumen Output
3000k	1716 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear

Linear – Grating Diffuser – Downlight – Suspended

ACU PTL 242001

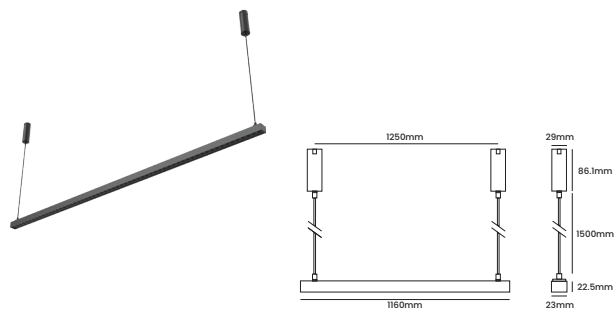


Wattage	Beam Angle
26W	30°
Colors Temperature	Lumen Output
3000k	1710 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear


Linear – Asymmetric Diffuser – Rotatable – Decorative Linear Light – Recessed

ACU PTL 241601

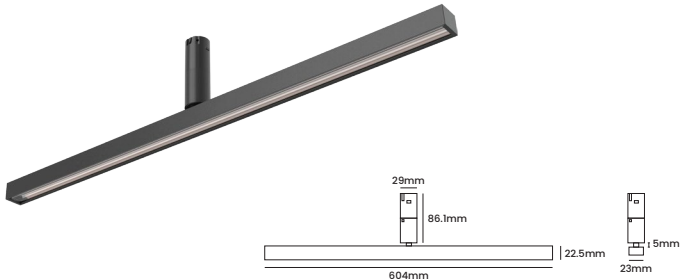

Wattage	Beam Angle
12W	90° x 45° x 15°
Colors Temperature	Lumen Output
3000k	1128 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTL 241602

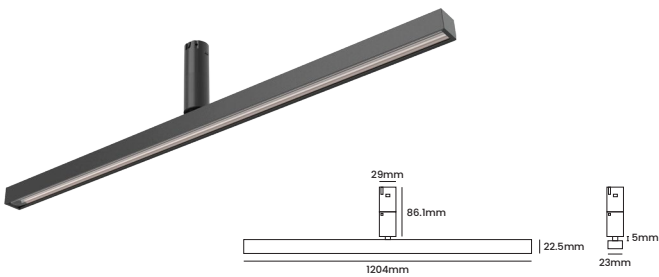


Wattage	Beam Angle
24W	90° x 45° x 15°
Colors Temperature	Lumen Output
3000k	2256 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear


Linear – Double Asymmetric Diffuser – Rotatable –Decorative Linear Light – Recessed

ACU PTL 241701

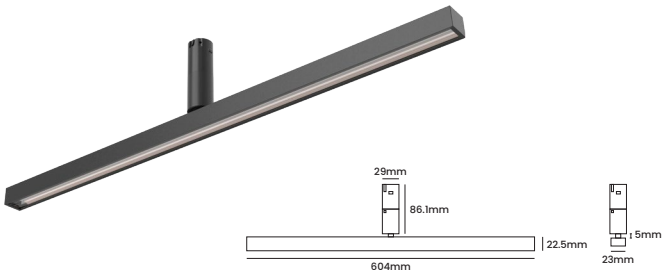

Wattage	Beam Angle
12W	100° x 90° x 15°
Colors Temperature	Lumen Output
3000k	1128 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTL 241702

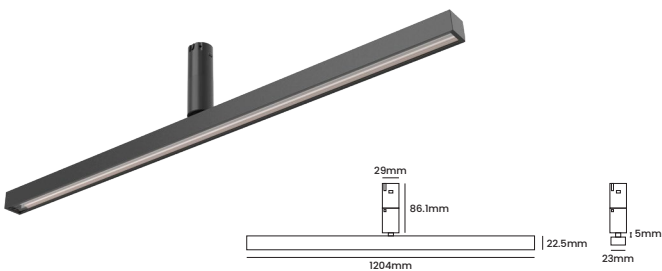

Wattage	Beam Angle
24W	100° x 90° x 15°
Colors Temperature	Lumen Output
3000k	2256 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto Up-Down

Linear - Up-Downlight - Suspended - Normal Diffuser


ACU PTL 242101

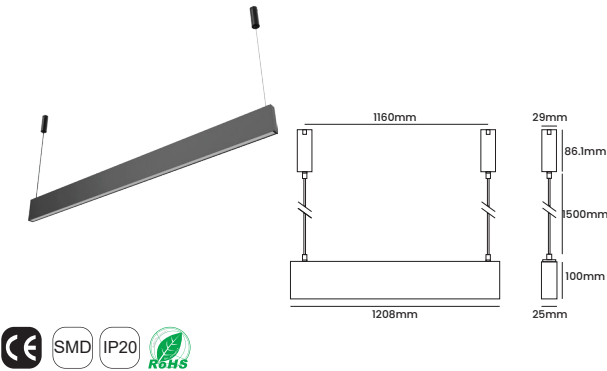

Wattage	Beam Angle
48W	Up: 100° , Down: 100°
Colors Temperature	Lumen Output
3000k	2707 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Prismatic Diffuser

ACU PTL 242201

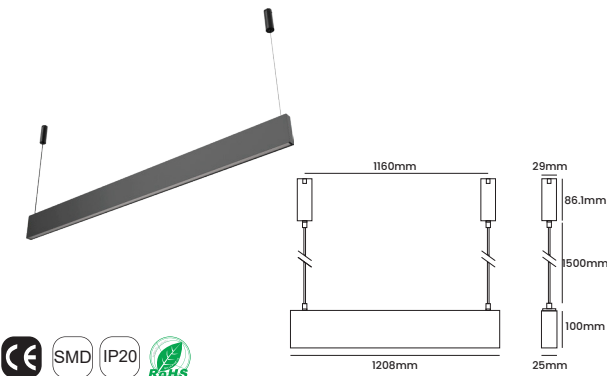


Wattage	Beam Angle
48W	Up: 100° , Down: 100°
Colors Temperature	Lumen Output
3000k	2797 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Up-Down

Linear - Up-Downlight - Suspended - Grating Diffuser

ACU PTL 242301

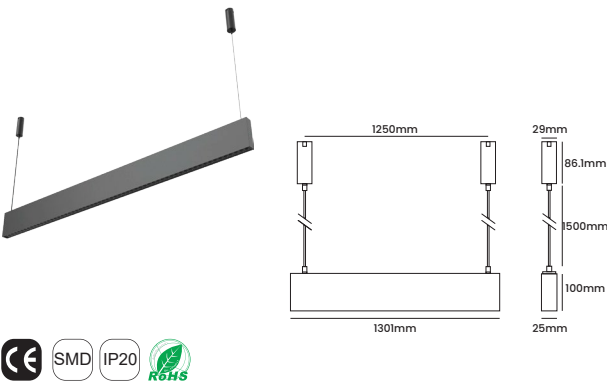

Wattage	Beam Angle
53W	Up:100° , Down: 100°
Colors Temperature	Lumen Output
3000k	2571 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto Linear


Rotatable – Spoon Wall Washer – Recessed

ACU WW 242401

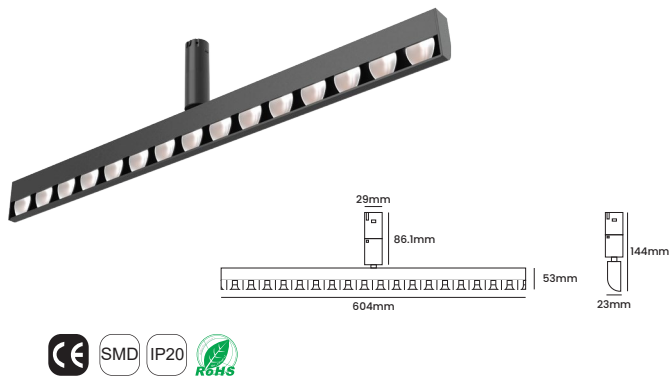

Wattage	Beam Angle
10W	60° X 25° X 73°
Colors Temperature	Lumen Output
3000k	846 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU WW 242402

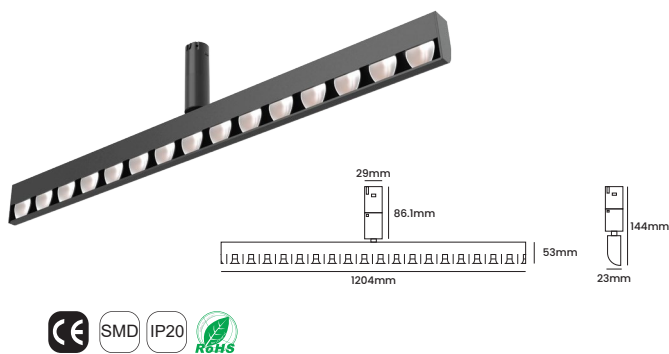

Wattage	Beam Angle
20W	60° X 25° X 73°
Colors Temperature	Lumen Output
3000k	1692 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto


Decorative Round Neon Flex – 2 base suspended

ACU WW 242501

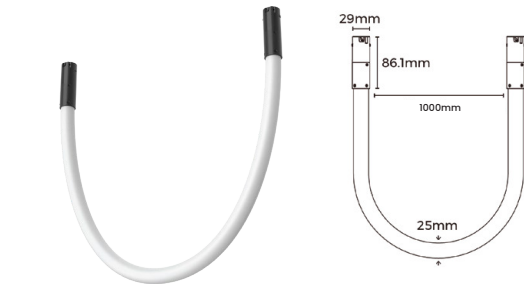

Wattage	Beam Angle
14W	360°
Colors Temperature	Lumen Output
3000k	920 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Silicon Neon Flex

ACU WW 242502

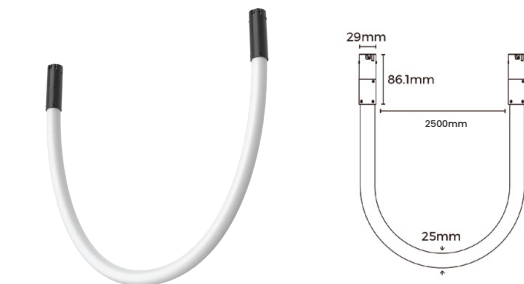


Wattage	Beam Angle
35W	360°
Colors Temperature	Lumen Output
3000k	2300 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Silicon Neon Flex



Ponto

Decorative Round Neon Flex – 2 base suspended

ACU WW 242503

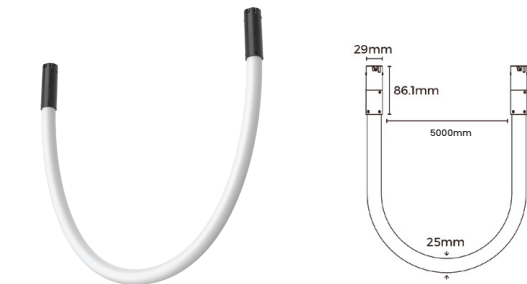


Wattage	Beam Angle
70W	360°
Colors Temperature	Lumen Output
3000k	4600 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Silicon Neon Flex

Ponto

Decorative – Spotlight – Suspended

ACU PTD 242601

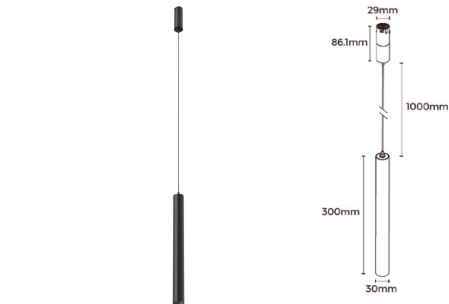


Wattage	Beam Angle
6W	24°
Colors Temperature	Lumen Output
3000k	370 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	☒ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto

Decorative – Spotlight –Suspended

ACU PTD 242602




Wattage	Beam Angle
6W	24°
Colors Temperature	Lumen Output
3000k	370 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto

Decorative – Neon Flex – Suspended

ACU PTD 242603



Wattage	Beam Angle
7W	360°
Colors Temperature	Lumen Output
3000k	460 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Silicon Neon Flex






Ponto

Decorative – Ball – Suspended

ACU PTD 242604

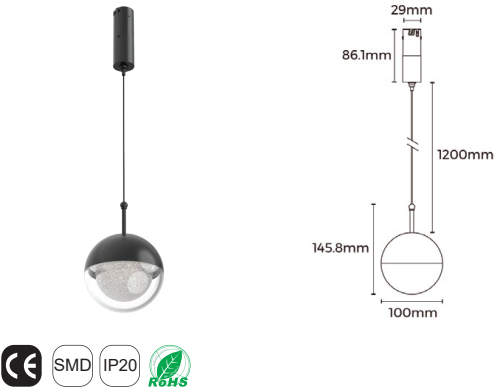


Wattage	Beam Angle
6W	360°
Colors Temperature	Lumen Output
3000k	560 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto

Decorative – Water Drop – Suspended

ACU PTD 242605

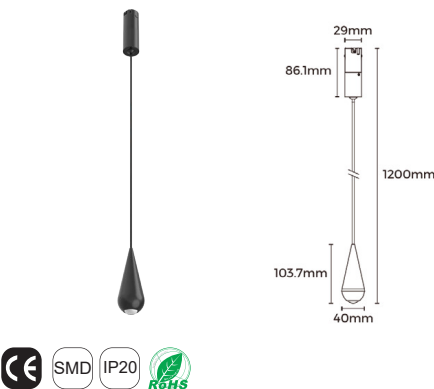

Wattage	Beam Angle
4W	110°
Colors Temperature	Lumen Output
3000k	340 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto

Decorative – Sunset – Pendant

ACU PTD 242606



Wattage	Beam Angle
3W	110°
Colors Temperature	Lumen Output
1500 k	170 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum







ACUMEN

📷 📺 📱 📞 @ acumenlight

ACUMEN LIGHT EXPERIENCE HOUSE

Jumeirah Lakes Towers, Cluster F, Indigo Icon Tower,
1403-1404 Office, Dubai, United Arab Emirates
Tel. +971 4 557 6933 / Whatsapp. +971 50 159 4577

ACUMEN LIGHT OPERATION CENTER

First Al Khail St, Al Quoz, Al Quoz Industrial Area 3,
Dubai, United Arab Emirates, Tel. +971 4 252 9155