

BOLLARD

OUTDOOR LIGHTING



Bollard

Bollard is a dedicated outdoor lighting family, designed for pathway and low-level illumination. Positioned as the primary upright guidance solution within the outdoor range, it combines clarity, durability, and functional performance, while adding a refined touch to the landscape.

Bollard

Floor Mounted

ACU OB 182072



Wattage	Beam angle
7 W	120°
Colors Temperature	Lumen Output
3000k	800 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum + PC

ACU OB 182073-1



Wattage	Beam angle
7 W	Asymmetric
Colors Temperature	Lumen Output
3000k	-
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum + PC

Bollard

Floor Mounted

ACU OB 182073-2



Wattage	Beam angle
7 W	Asymmetric
Colors Temperature	Lumen Output
3000k	-
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum + PC

ACU OB 182073-3



Wattage	Beam angle
7 W	Asymmetric
Colors Temperature	Lumen Output
3000k	-
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum + PC



UJHEN

Bollard


Floor Mounted

ACU OB 182075-1



Wattage	Beam angle
84x0.1 W	360°
Colors Temperature	Lumen Output
3000k	497 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum & Glass

ACU OB 182075-2

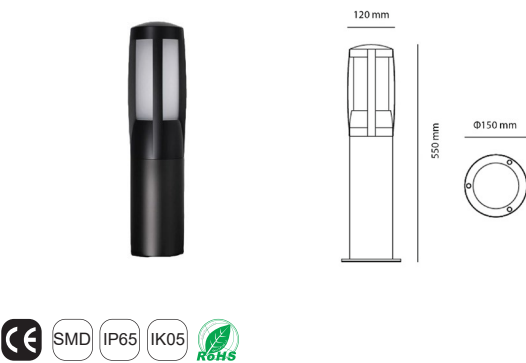


Wattage	Beam angle
84x0.1 W	360°
Colors Temperature	Lumen Output
3000k	497 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum & Glass

Bollard

Floor Mounted

ACU OB 182075-2

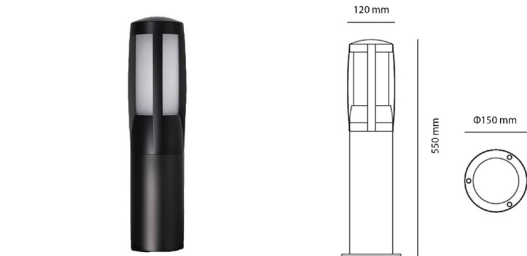

Wattage	Beam angle
84x0.1 W	360°
Colors Temperature	Lumen Output
3000k	497 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum & Glass

ACU OB 252072S




Wattage	Beam angle
2x6 W	60°
Colors Temperature	Lumen Output
3000k	960 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Bollard


Floor Mounted

ACU OB 267071



Wattage	Beam angle
12 W	120°
Colors Temperature	Lumen Output
3000k	1020 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU OB 267072




Wattage	Beam angle
12 W	120°
Colors Temperature	Lumen Output
3000k	1020 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Bollard

Floor Mounted

ACU OB 267073



Wattage	Beam angle
24x0.25 W	360°
Colors Temperature	Lumen Output
3000k	214 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum





ACUMEN

📷 📺 📱 📞 @ acumenlight

ACUMEN LIGHT EXPERIENCE HOUSE

Jumeirah Lakes Towers, Cluster F, Indigo Icon Tower,
1403-1404 Office, Dubai, United Arab Emirates
Tel. +971 4 557 6933 / Whatsapp. +971 50 159 4577

ACUMEN LIGHT OPERATION CENTER

First Al Khail St, Al Quoz, Al Quoz Industrial Area 3,
Dubai, United Arab Emirates, Tel. +971 4 252 9155