

PROJECTOR

OUTDOOR LIGHTING



Projector

The projector family is described in the catalogue as durable outdoor spotlights for gardens, trees, and plants. Sylune is one of the two locked projector branches within your outdoor structure.



SYLUNE


Durable outdoor spotlight designed for gardens, trees, and planting areas. Featuring an adjustable head and a weatherproof IP65 design, it offers versatile installation with both ground spike and surface-mounted options.

66

Projector Sylune

Adjustable, Surface Mounted

ACU OP 252501M

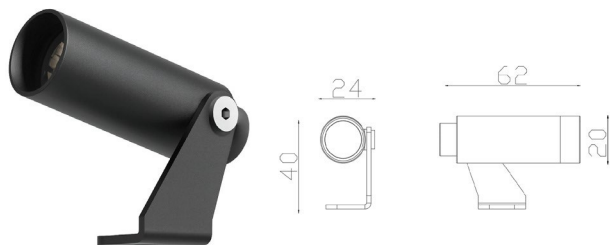


Wattage	Beam angle
2.5 W	20° 40°
Colors Temperature	Lumen Output
3000k	90 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Projector Sylune

Adjustable, Planted

ACU OP 252501S

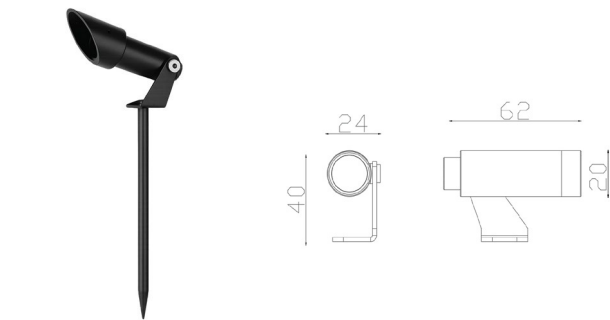

Wattage	Beam angle
2.5 W	20° 40°
Colors Temperature	Lumen Output
3000k	90 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Projector Sylune

Adjustable, Surface Mounted

ACU OP 252502M



Wattage	Beam angle
5 W	15° 20° 40°
Colors Temperature	Lumen Output
3000k	218 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum

Projector Sylune

Adjustable, Planted

ACU OP 252502S



Wattage	Beam angle
5 W	15° 20° 40°
Colors Temperature	Lumen Output
3000k	218 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum






Projector Sylune

Adjustable, Surface Mounted

ACU OP 252503M

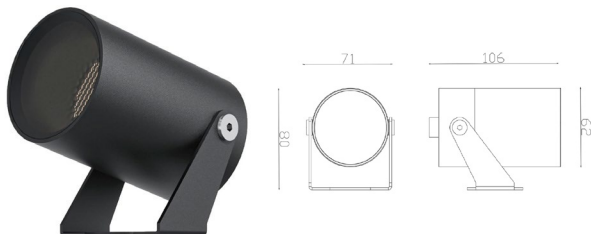


Wattage	Beam angle
12 W	15° 30° 40°
Colors Temperature	Lumen Output
3000k	612 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum

Projector Sylune

Adjustable, Planted

ACU OP 252503S

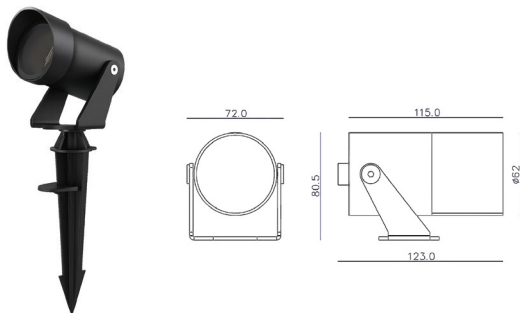


Wattage	Beam angle
12 W	15° 30° 40°
Colors Temperature	Lumen Output
3000k	612 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum



Projector Sylune

Adjustable, Surface Mounted

ACU OP 252504M

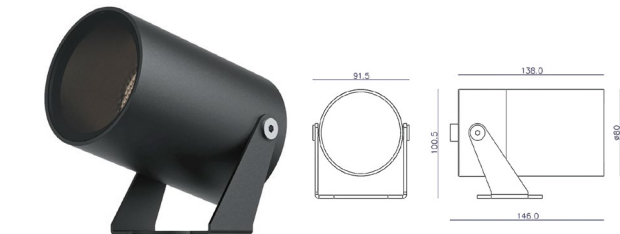

Wattage	Beam angle
16 W	15° 20° 30° 40°
Colors Temperature	Lumen Output
3000k	855 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum

Projector Sylune

Adjustable, Planted

ACU OP 252504S



Wattage	Beam angle
16 W	15° 20° 40°
Colors Temperature	Lumen Output
3000k	855 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum






S Y L I G H T

Sylight is the second locked projector branch in your outdoor structure. It belongs to the same projector family described as durable outdoor spotlights for gardens, trees, and plants.

Projector Sylight

Adjustable, Surface Mounted

ACU OP 211003M




Wattage	Beam angle
6 W	15° 40°
Colors Temperature	Lumen Output
3000k	540 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥82	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum

Projector Sylight

Adjustable, Planted

ACU OP 211003S




Wattage	Beam angle
6 W	15° 25° 40°
Colors Temperature	Lumen Output
3000k	540 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥82	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum



Projector Sylight

Adjustable, Surface Mounted

ACU OP 211101M




Wattage	Beam angle
12 W	15° 40°
Colors Temperature	Lumen Output
3000k	1080 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥82	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum

Projector Sylight

Adjustable, Planted

ACU OP 211101S



Wattage	Beam angle
12 W	15° 40°
Colors Temperature	Lumen Output
3000k	1080 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥82	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum






Projector Sylight

Adjustable, Surface Mounted

ACU OP 211102M




Wattage	Beam angle
16 W	15° 40°
Colors Temperature	Lumen Output
3000k	1440 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥82	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum

Projector Sylight

Adjustable, Planted

ACU OP 211102S



Wattage	Beam angle
16 W	15° 40°
Colors Temperature	Lumen Output
3000k	1440 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥82	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum






Projector

Tree Ring

ACU OP 211000R

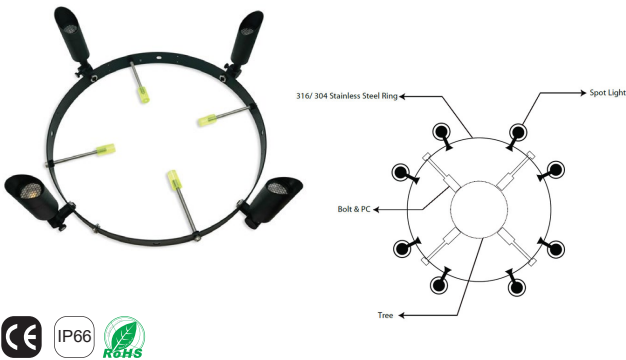

Tree Ring, Used with Tree light projectors

Diameter

600mm





ACUMEN

Instagram Facebook LinkedIn X @ acumenlight

ACUMEN LIGHT EXPERIENCE HOUSE

Jumeirah Lakes Towers, Cluster F, Indigo Icon Tower,
1403-1404 Office, Dubai, United Arab Emirates
Tel. +971 4 557 6933 / Whatsapp. +971 50 159 4577

ACUMEN LIGHT OPERATION CENTER

First Al Khail St, Al Quoz, Al Quoz Industrial Area 3,
Dubai, United Arab Emirates, Tel. +971 4 252 9155