

OUTDOOR LINEAR

OUTDOOR LIGHTING




Outdoor Linear

The Outdoor Linear Series is described as a family of in-ground and surface mounted fixtures used to light architectural elements and wall textures. The catalogue emphasizes its range of wattages and shapes, plus special components that help provide visual comfort.

Outdoor Linear


Inground Recessed

ACU OL 182020H



Wattage	Beam Angle
3x2W	13° 25° 30°
Colors Temperature	Lumen Output
3000k	≈395 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder Coated Aluminum Housing

ACU OL 182020A




Wattage	Beam Angle
3x2 W	Asymmetrical 45° x 35°
Colors Temperature	Lumen Output
3000k	≈344 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder Coated Aluminum Housing



Outdoor Linear


Inground Recessed

ACU OL 182021H



Wattage	Beam Angle
6x2W	13° 25° 30°
Colors Temperature	Lumen Output
3000k	≈960 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing

ACU OL 182021A




Wattage	Beam Angle
6x2W	Asymmetrical 45° x 35°
Colors Temperature	Lumen Output
3000k	≈823 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing



Outdoor Linear


Inground Recessed

ACU OL 182022H

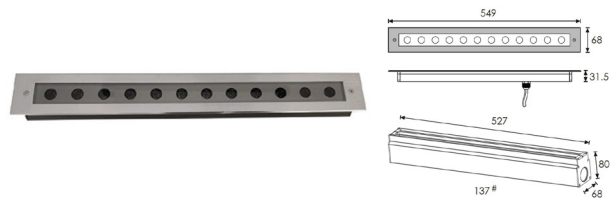

Wattage	Beam Angle
12x1.5W	20° 30° 45°
Colors Temperature	Lumen Output
3000k	≈1020 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Drive)	Stainless Steel Cover with Powder, Coated Aluminum Housing

ACU OL 182022A

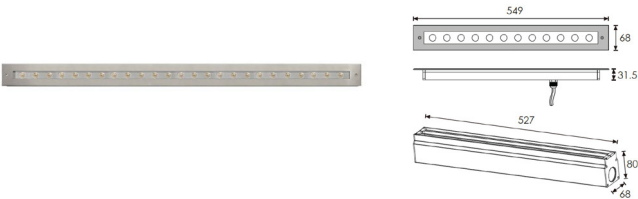


Wattage	Beam Angle
12x1.5W	Asymmetrical 45° x 35°
Colors Temperature	Lumen Output
3000k	≈1020 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing



Outdoor Linear

Inground Recessed

ACU OL 182023H

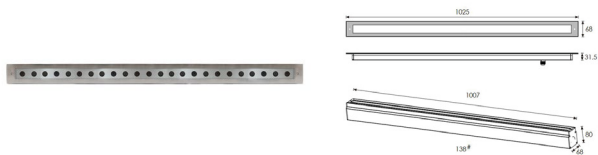

Wattage	Beam Angle
24x1.5W	8° 20° 35° 45°
Colors Temperature	Lumen Output
3000k	≈2055 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing

ACU OL 182023A



Wattage	Beam Angle
24x1.5W	Asymmetrical 45° x 35°
Colors Temperature	Lumen Output
3000k	≈2114 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing






Outdoor Linear


Adjustable Surface Mounted

ACU OL 182024H



Wattage	Beam Angle
6x1W	15° 20° 30° 50°
Colors Temperature	Lumen Output
3000k	≈400 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Dark Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing.

ACU OL 182025H




Wattage	Beam Angle
12x1W	15° 20° 30° 50°
Colors Temperature	Lumen Output
3000k	≈926 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Dark Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing.



Outdoor Linear

Adjustable Surface Mounted

ACU OL 182026H



Wattage

24x1W

Beam Angle

15° 20° 30° 50°

Colors Temperature

3000k

Lumen Output

≈1850 Lm

Installation

Surface Mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Dark Grey

Input Voltage

220V AC
(Via the Built In Driver)


Materials

Stainless Steel Cover
with Powder, Coated
Aluminum Housing.

Outdoor Linear

Inground Recessed

ACU OL 182080H



Wattage

18W

Beam Angle

20° 30° 45°

Colors Temperature

3000k

Lumen Output

≈1050 Lm

Installation

Inground Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

220V AC
(Via the Built In Driver)

Materials


Stainless Steel Cover
with Powder, Coated
Aluminum Housing.



Outdoor Linear


Inground Recessed

ACU OL 182081H



Wattage	Beam Angle
9W	8° 20° 25° 30° 35° 45°
Colors Temperature	Lumen Output
3000k	≈510 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing.

ACU OL 182082H



Wattage	Beam Angle
9W	8° 20° 25° 30° 35° 45°
Colors Temperature	Lumen Output
3000k	≈520 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing.






Outdoor Linear


Inground Recessed

ACU INL 10-3K220V-IK10-1m



Wattage	Beam Angle
10W	120°
Colors Temperature	Lumen Output
3000k	≈900 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥80	■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Aluminum with Tempered Glass

ACU INL 10-3K24V-IK10-1m




Wattage	Beam Angle
10W	120°
Colors Temperature	Lumen Output
3000k	≈900 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥80	■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Aluminum with Tempered Glass

Outdoor Linear


Inground Recessed

ACU INL 14-3K220V-IK10-1m



Wattage	Beam Angle
14W	120°
Colors Temperature	Lumen Output
3000k	≈1260 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥80	■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Aluminum with Tempered Glass

ACU INL 14-3K24V-IK10-1m



Wattage	Beam Angle
14W	120°
Colors Temperature	Lumen Output
3000k	≈1260 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥80	■ Grey
Input Voltage	Materials
24V DC (Via the External Driver)	Aluminum with Tempered Glass



ACUMEN

📷 📺 📱 📞 @ acumenlight

ACUMEN LIGHT EXPERIENCE HOUSE

Jumeirah Lakes Towers, Cluster F, Indigo Icon Tower,
1403-1404 Office, Dubai, United Arab Emirates
Tel. +971 4 557 6933 / Whatsapp. +971 50 159 4577

ACUMEN LIGHT OPERATION CENTER

First Al Khail St, Al Quoz, Al Quoz Industrial Area 3,
Dubai, United Arab Emirates, Tel. +971 4 252 9155