


ACU OL182080

LED 18W

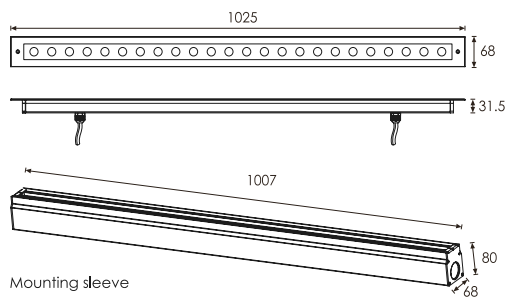

Technical Features

Light Source: LED SMD

Beam Angle: 20°/25°/30°/35°/45°

Color Temperature: 2000K/3000K/6000K

Light Output: 1359LM

Color Rendering Index: Ra≥85

IK Rate: IK07

Operating Temperature: -20°C~+40°C

Rated Life Hours: 30,000~50,000H

LED Driver (Remote): Tridonic

Input: 240V AC 50/60Hz


Power Consumption: Max 18W

IP Rate: IP67


Application



Beam Angles

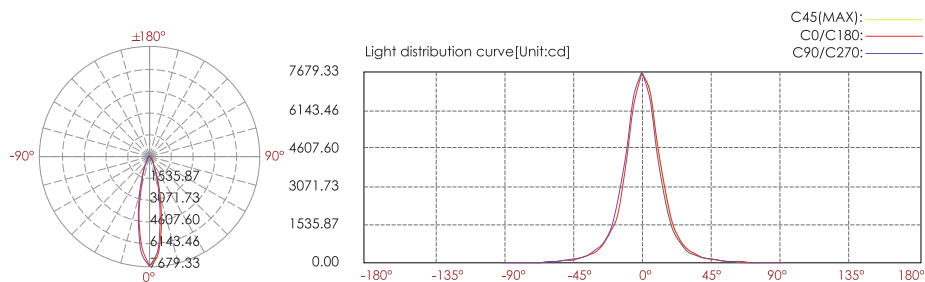

Lux

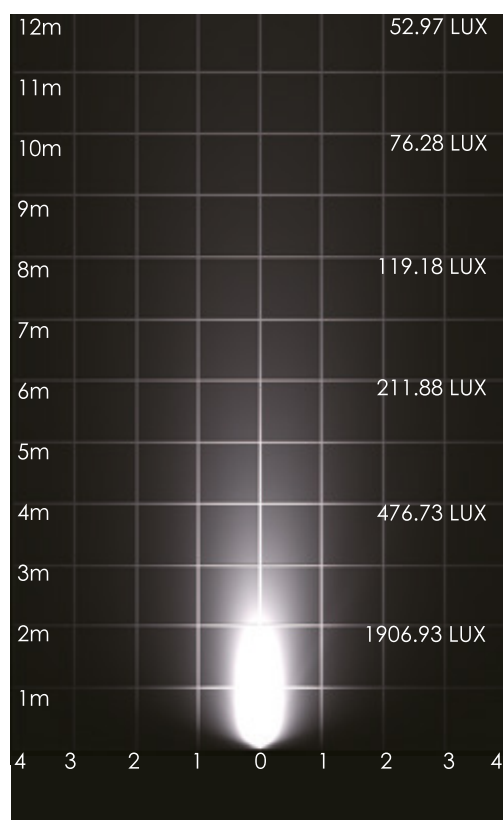

Lux distance curve

Illuminance at a distance			
Center beam LUX		Beam width	
		V	H
2m	1906.93 LUX	0.8m	0.8m
4m	476.73 LUX	1.6m	1.6m
6m	211.88 LUX	2.4m	2.5m
8m	119.18 LUX	3.3m	3.3m
10m	73.28 LUX	4.1m	4.1m
12m	57.97 LUX	4.9m	4.9m

Ver.Spread:23.1 Horiz.Spread:23.2