


ACU OSR 182036

LED 6.5W

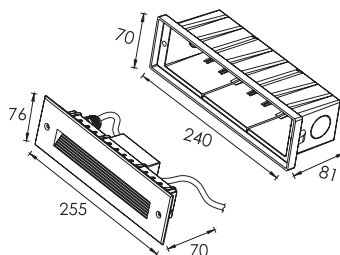

Technical Features

Light Source: LED 15xSMD3030

Color Temperature: 3000K/4000K

Light Output: 92LM/99LM

Color Rendering Index: Ra>85

IK Rate: IK10

Operating Temperature: -20°C~+40°C

Rated Life Hours: 30,000~50,000H

LED Driver : Built-in

Input: 240V AC 50/60Hz

LED-Current: 52mA

Power Consumption: Max 6.5W


IP Rate: IP65

Material: Die-casting grey powder coated aluminum, PC

Application



Light Distribution

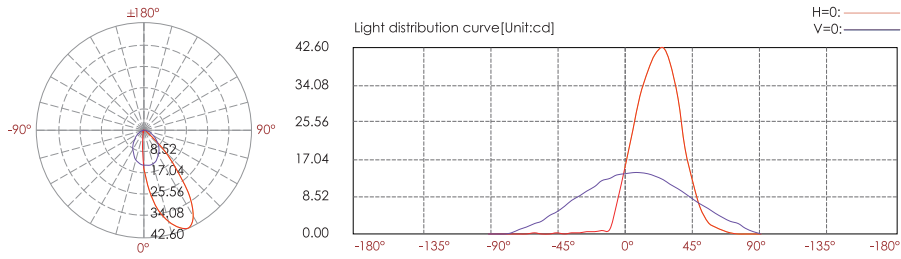

Lux



Lux distance curve

	Illuminance at a distance		
	Center beam LUX	Beam width	
		V	H
2m	3.84 LUX	3.20m	1.4m
4m	0.96 LUX	6.40m	2.9m
6m	0.43 LUX	9.70m	4.3m
8m	0.24 LUX	12.9m	5.7m
10m	0.15 LUX	16.1m	7.1m
12m	0.11 LUX	19.3m	8.6m

Ver.Spread:77.8 Horiz.Spread:39.3