


## ACU UW 208004

LED 18x2W

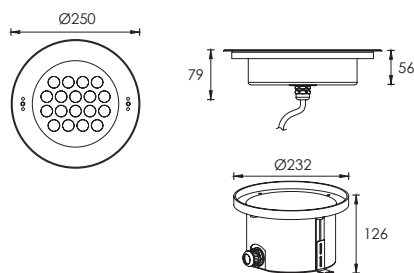

### Technical Features

**Light Source:** LED COB

**Beam Angle:** 20°/25°/30°/35°/45°

**Color Temperature:** 2000K/3000K/6000K

**Light Output:** 1828LM/2221LM

**Color Rendering Index:** Ra≥ 85

**IK Rate:** IK10

**Operating Temperature:** -20°C~+40°C

**Input:** 24V DC

**Power Consumption:** Max 18x2W

**IP Rate:** IP68

**Material:** Housing - Stainless Steel  
Gasket - Silicone

### Application



## Beam Angles

20°



25°





30°



35°



45°

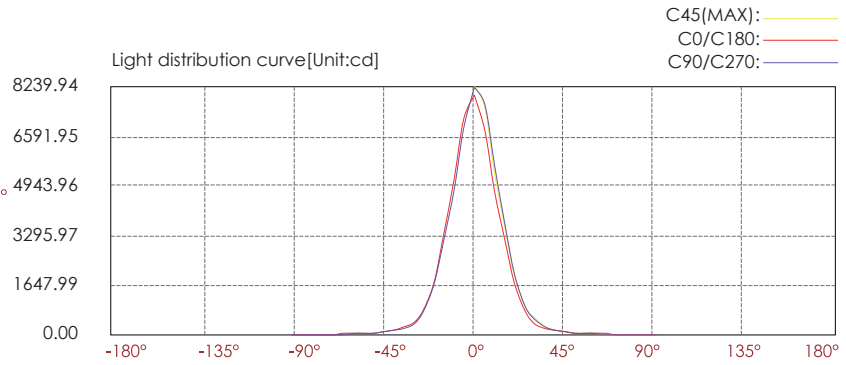

## Lux

Lux distance curve

Illuminance at a distance		Beam width	
Center beam LUX		V	H
2m	1981.91 LUX	0.9m	0.9m
4m	495.48 LUX	1.8m	1.8m
6m	220.21 LUX	2.8m	2.6m
8m	123.87 LUX	3.7m	3.5m
10m	79.28 LUX	4.6m	4.4m
12m	55.05 LUX	5.5m	5.3m

Ver.Spread:25.9 Horiz.Spread:24.8