


ACU UW 208003

LED 6x2W



Technical Features

Light Source: LED COB

Beam Angle: 20°/25°/30°/35°/45°

Color Temperature: 2000K/3000K/6000K

Light Output: 656LM/754LM

Color Rendering Index: Ra≥ 85

IK Rate: IK08

Operating Temperature: -20°C~+40°C

Input: 24V DC

Power Consumption: Max 6x2W

IP Rate: IP68

Material: Housing - Stainless Steel
Gasket - Silicone

Application



Beam Angles

20°



25°





30°



35°



45°

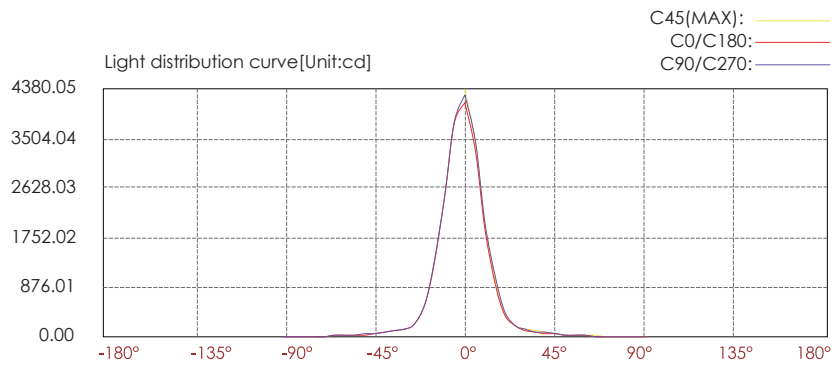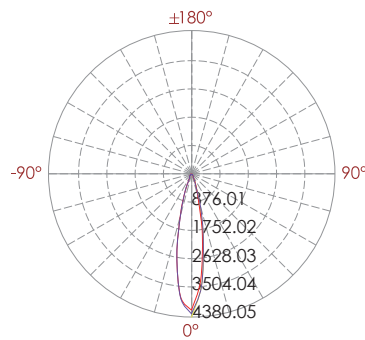

Lux

Lux distance cure

Illuminance at a distance		Beam width	
Center beam LUX		V	H
2m	1037.10 LUX	0.7m	0.7m
4m	259.27 LUX	1.5m	1.5m
6m	115.23 LUX	2.2m	2.2m
8m	64.82 LUX	3.0m	2.9m
10m	41.48 LUX	3.7m	3.6m
12m	28.81 LUX	4.5m	4.4m

Ver.Spread:21.1 Horiz.Spread:20.7