

# INDOOR LIGHTING



**ACUMEN indoor lighting** enhances the interior environment of any home. With a wide variety of styles and shapes, our lighting fixtures provide excellent illumination while creating a comfortable atmosphere.

Our diverse range of lighting types—such as spotlights, wall washers, pendant and track light systems, recessed and surface-mounted downlights—perfectly complements any interior design.

The best lighting solutions conserve energy, and while LED light sources offer high luminance levels, they can sometimes cause glare.

To address this, ACUMEN LED fixtures are often equipped with anti-glare accessories and lenses to minimize this uncomfortable visual effect.



# MODULAR


**ACUMEN** Modular LED light fixtures can fit any environment and can serve as an ambient, task, or accent lighting type. A variety of beam angles, frame types, and colors will compliment any interior design. For a more comfortable atmosphere, there are anti-glare accessories and dimming options available. The wattage

- DRIVERS ARE PROVIDED BY **TRIDONIC**

# Narrow Beam Angle

## ACU 01703-09

RTL



Wattage	Beam Angle
---------	------------

9W	10°
----	-----

Color Temperature	Lumen Output
-------------------	--------------

3000K	750 LM
-------	--------

Operation Temperature	Rated Life Hours
-----------------------	------------------

-20°C~+40°C	30,000 - 50,000H
-------------	------------------

Installation	Input Voltage
--------------	---------------


Recessed	220V AC (Via the Attached Remote Driver)
----------	---

Accessory	CRI
-----------	-----

Honey Comb 	≥ 90
---	------

## ACU 01703-15

RTL



Wattage	Beam Angle
---------	------------

15W	10°
-----	-----

Color Temperature	Lumen Output
-------------------	--------------

3000K	1100 LM
-------	---------

Operation Temperature	Rated Life Hours
-----------------------	------------------

-20°C~+40°C	30,000 - 50,000H
-------------	------------------

Installation	Input Voltage
--------------	---------------

Recessed	220V AC (Via the Attached Remote Driver)
----------	---


Accessory	CRI
-----------	-----


Honey Comb 	≥ 90
---	------

# Narrow Beam Angle

## ACU 01704-09


RTL




<b>Wattage</b>	<b>Beam Angle</b>
9W	15° 25° 40° 60°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	750 LM
<b>Operation Temperature</b>	<b>Rated Life Hours</b>
-20°C~+40°C	30,000 - 50,000H
<b>Installation</b>	<b>Input Voltage</b>
Recessed	220V AC (Via the Attached Remote Driver)
<b>Accessory</b>	<b>CRI</b>
Honey Comb 	≥ 90

## ACU 01704-15

RTL



<b>Wattage</b>	<b>Beam Angle</b>
15W	15° 25° 40° 60°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	1100 LM
<b>Operation Temperature</b>	<b>Rated Life Hours</b>
-20°C~+40°C	30,000 - 50,000H
<b>Installation</b>	<b>Input Voltage</b>
Recessed	220V AC (Via the Attached Remote Driver)
<b>Accessory</b>	<b>CRI</b>
Honey Comb 	≥ 90




# THE FRAMES


**Stella Adjustable, Libra, Hydra Collection, Lynex, and Cursa.**  
All these product frames are available in multiple color options to suit a variety of styles and design preferences!

- Black / Black
- White / Silver
- ▣ White / Black
- ◻ White / Gold
- White / White
- ◼ Black / Gold

**ACU 10002 ADJ**  
Stella Adj




**ACU 10004**  
LIBRA




# FRAMES

Modular



**ACU 10005R**  
HYDRA





**ACU 10005RW**  
HYDRA



**ACU 10005S**  
HYDRA-SQUARE



**10005SW**  
HYDRA-SQUARE




# FRAMES

---

Modular


## ACU 10006R

LYNX



## ACU 10006RW


LYNX



---

## ACU 10007DS

CURSA



# LEO-IP

A recessed spotlight made of powder-coated aluminium housing with excellent heat sink capability to minimize luminous degradation. This light is recommended to be used in wet applications such as washrooms.


- DRIVERS ARE PROVIDED BY **TRIDONIC**



# LEO IP

Round Frame

## ACU S 17009



Wattage	Beam Angle
---------	------------

8W	20° 24° 36°
----	-------------

Color Temperature	Lumen Output
-------------------	--------------

3000k	675 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	■ Black □ White
-----	-----------------

Input Voltage	Material
---------------	----------


220V AC (Via the Attached Remote Driver)	Aluminum
---	----------

Cutting Section
-----------------

Cut out Ø53mm
---------------



## ACU S 17010



Wattage	Beam Angle
---------	------------

15W	15° 24° 38° 60°
-----	-----------------

Color Temperature	Lumen Output
-------------------	--------------

3000k	1125 Lm
-------	---------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	■ Black □ White
-----	-----------------

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Aluminum
---	----------

Cutting Section
-----------------

Cut out Ø68mm
---------------






## LEO IP

Adjustable

### ACU S 17010 ADJ




<b>Wattage</b>	<b>Beam Angle</b>
15W	15° 24° 38° 60°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1125 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Aluminum
<b>Cutting Section</b>	
Cut out Ø85 mm	



## LEO IP

Mini Round Frame

### ACU S 17010MR



<b>Wattage</b>	<b>Beam Angle</b>
15W	10°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	90 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Aluminum
<b>Cutting Section</b>	
Cut out Ø32 mm	



# DOWN LIGHT

The range of variety of the **Down Light** categories makes it irresistible to use. As users can find different wattages, color temperature, and beam angles, as well as different types, from the recessed surface, mounted, to suspended downlights.

**Down Light families** will allow the users to use them in their multiple applications.

# NERO COLLECTION




## **Nero Black Hole**

This lighting solution is engineered to precisely focus light and distribute it evenly, ensuring both functional and aesthetic illumination. Featuring a small aperture design combined with cross-lighting technology, it minimizes direct glare while enhancing ambient brightness. The fixture delivers low glare performance and boasts high luminous efficiency, reaching up to 70%, making it an ideal choice for energy-efficient and visually comfortable lighting applications.

# Nero FLAT

## ACU FS 251101

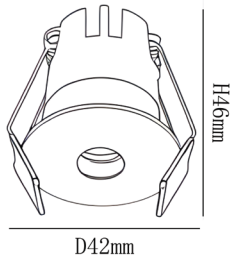


<b>Wattage</b>	<b>Beam Angle</b>
5W	15° 36°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	300 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
<b>Cutting Section</b>	
Cut out Ø35 mm	



# Flat Shape Frame

Nero Collection


## ACU FS 251102



<b>Wattage</b>	<b>Beam Angle</b>
10W	15° 36°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	600 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
<b>Cutting Section</b>	
Cut out Ø65 mm	



## ACU FS 251103



<b>Wattage</b>	<b>Beam Angle</b>
5W	15° 36°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	900 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
<b>Cutting Section</b>	
Cut out Ø75 mm	








Nero **CURVED**

# Adjustable Curved Shape Frame

Nero Collection

## ACU CS 251000



Wattage	Beam Angle
---------	------------

5W	25° 40°
----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	172 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥95	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------


220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
---	------------------------

Cutting Section
-----------------

Cut out Ø35 mm
----------------



## ACU CS 251001



Wattage	Beam Angle
---------	------------

5W	15° 36°
----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	300 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
---	------------------------

Cutting Section
-----------------


Cut out Ø35 mm
----------------



# Adjustable Curved Shape Frame

Nero Collection

## ACU CS 251002



Wattage	Beam Angle
---------	------------

10W	15° 36°
-----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	600 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥95	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------


220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
---	------------------------

Cutting Section
-----------------

Cut out Ø85 mm
----------------



## ACU CS 251003



Wattage	Beam Angle
---------	------------

15W	15° 36°
-----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	900 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
---	------------------------

Cutting Section
-----------------

Cut out Ø75 mm
----------------






# Nero TRIMLESS



## ACU TS 251201




<b>Wattage</b>	<b>Beam Angle</b>
5W	15° 36°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	350 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
<b>Cutting Section</b>	
Cut out Ø35mm	



# Nero Trimless Frame

Nero Collection


## ACU TS 251202



<b>Wattage</b>	<b>Beam Angle</b>
10W	15° 36°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	700 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥95	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
<b>Cutting Section</b>	
Cut out Ø45 mm	



## ACU TS 251203




<b>Wattage</b>	<b>Beam Angle</b>
15W	15° 36°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1050 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
<b>Cutting Section</b>	
Cut out Ø45 mm	





# Nero WALL WASHER

## ACU WW 251301



<b>Wattage</b>	<b>Beam Angle</b>
5W	15° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	350 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥95	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
<b>Cutting Section</b>	
Cut out Ø35mm	



# VEGA C

LED ultra-thin downlight design is handy, simple, and easy to install. The anti-glare system provides visual comfort for the user. This light comes with a frosted acrylic diffuser for high light transmittance.


- DRIVERS ARE PROVIDED BY **TRIDONIC**





# Recessed Down Light


## ACU D 20060



<b>Wattage</b>	<b>Beam Angle</b>
5W	100°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	400 LM
<b>Operation Temperature</b>	<b>Rated Life Hours</b>
-20°C~+40°C	30,000 - 50,000H
<b>Installation</b>	<b>Input Voltage</b>
Recessed	220V AC (Via the Attached Remote Driver)
<b>CRI</b>	
≥ 90	



## ACU D 20061




<b>Wattage</b>	<b>Beam Angle</b>
7W	100°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	560 LM
<b>Operation Temperature</b>	<b>Rated Life Hours</b>
-20°C~+40°C	30,000 - 50,000H
<b>Installation</b>	<b>Input Voltage</b>
Recessed	220V AC (Via the Attached Remote Driver)
<b>CRI</b>	
≥ 90	



# Recessed Down Light


## ACU D 20062



<b>Wattage</b>	<b>Beam Angle</b>
9W	100°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	720 LM
<b>Operation Temperature</b>	<b>Rated Life Hours</b>
-20°C~+40°C	30,000 - 50,000H
<b>Installation</b>	<b>Input Voltage</b>
Recessed	220V AC (Via the Attached Remote Driver)
<b>CRI</b>	
≥ 90	



## ACU D 20063




<b>Wattage</b>	<b>Beam Angle</b>
12W	100°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	960 LM
<b>Operation Temperature</b>	<b>Rated Life Hours</b>
-20°C~+40°C	30,000 - 50,000H
<b>Installation</b>	<b>Input Voltage</b>
Recessed	220V AC (Via the Attached Remote Driver)
<b>CRI</b>	
≥ 90	



# Recessed Down Light


## ACU D 20064

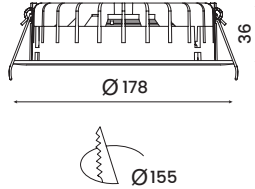

<b>Wattage</b>	<b>Beam Angle</b>
15W	100°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	1200 LM
<b>Operation Temperature</b>	<b>Rated Life Hours</b>
-20°C~+40°C	30,000 - 50,000H
<b>Installation</b>	<b>Input Voltage</b>
Recessed	220V AC (Via the Attached Remote Driver)
<b>CRI</b>	
≥ 90	



## ACU D 20065




<b>Wattage</b>	<b>Beam Angle</b>
20W	100°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	1600 LM
<b>Operation Temperature</b>	<b>Rated Life Hours</b>
-20°C~+40°C	30,000 - 50,000H
<b>Installation</b>	<b>Input Voltage</b>
Recessed	220V AC (Via the Attached Remote Driver)
<b>CRI</b>	
≥ 90	



# Recessed Down Light


## ACU D 20066

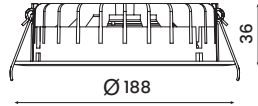

<b>Wattage</b>	<b>Beam Angle</b>
25W	100°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	2000 LM
<b>Operation Temperature</b>	<b>Rated Life Hours</b>
-20°C~+40°C	30,000 - 50,000H
<b>Installation</b>	<b>Input Voltage</b>
Recessed	220V AC (Via the Attached Remote Driver)
<b>CRI</b>	
≥ 90	



## ACU D 20067

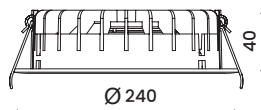

<b>Wattage</b>	<b>Beam Angle</b>
20W	100°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	1600 LM
<b>Operation Temperature</b>	<b>Rated Life Hours</b>
-20°C~+40°C	30,000 - 50,000H
<b>Installation</b>	<b>Input Voltage</b>
Recessed	220V AC (Via the Attached Remote Driver)
<b>CRI</b>	
≥ 90	



# MEGA

LED ultra-thin downlight design is handy, simple, and easy to install. The anti-glare system provides visual comfort for the user. This light comes with a frosted acrylic diffuser for high light transmittance.


- DRIVERS ARE PROVIDED BY **TRIDONIC**





# Recessed Down Light


## ACU DR 240001



<b>Wattage</b>	<b>Beam Angle</b>
15W	85°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	1423 LM
<b>Operation Temperature</b>	<b>Rated Life Hours</b>
-20°C~+40°C	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Installation</b>
220V AC (Via the Attached Remote Driver)	Recessed



## ACU DR 240002




<b>Wattage</b>	<b>Beam Angle</b>
33W	85°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	3532 LM
<b>Operation Temperature</b>	<b>Rated Life Hours</b>
-20°C~+40°C	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Installation</b>
220V AC (Via the Attached Remote Driver)	Recessed



# Surface Mounted Down Light

## ACU DSM 240003



Wattage	Beam Angle
---------	------------

8W	80°
----	-----

Color Temperature	Lumen Output
-------------------	--------------

3000K	635 LM
-------	--------

Operation Temperature	Rated Life Hours
-----------------------	------------------

-20°C~+40°C	30,000 - 50,000H
-------------	------------------

CRI	Colors
-----	--------


≥90	<input type="checkbox"/> Black/Black <input type="checkbox"/> White/Gold <input type="checkbox"/> White/White <input type="checkbox"/> White/Silver
-----	--

Input Voltage	Installation
---------------	--------------

220V AC (Via the Attached Remote Driver)	Surface Mounted
---	-----------------



## ACU DSM 240004



Wattage	Beam Angle
---------	------------

15W	80°
-----	-----

Color Temperature	Lumen Output
-------------------	--------------

3000K	1139 LM
-------	---------

Operation Temperature	Rated Life Hours
-----------------------	------------------

-20°C~+40°C	30,000 - 50,000H
-------------	------------------

CRI	Colors
-----	--------

≥90	<input type="checkbox"/> Black/Black <input type="checkbox"/> White/Gold <input type="checkbox"/> White/White <input type="checkbox"/> White/Silver
-----	--

Input Voltage	Installation
---------------	--------------


220V AC (Via the Attached Remote Driver)	Surface Mounted
---	-----------------





# Surface Mounted Down Light

## ACU DSM 240005



Wattage	Beam Angle
---------	------------

30W	110°
-----	------

Color Temperature	Lumen Output
-------------------	--------------

3000K	3160 LM
-------	---------

Operation Temperature	Rated Life Hours
-----------------------	------------------

-20°C~+40°C	30,000 - 50,000H
-------------	------------------

CRI	Colors
-----	--------

≥90	■ Black/Black   ■ White/Gold □ White/White   □ White/Silver
-----	--

Input Voltage	Installation
---------------	--------------

220V AC (Via the Attached Remote Driver)	Surface Mounted
---	-----------------





# PAVO



This family is specialized in residential and hospitality applications because of its high efficiency, variety of beam angles, and wattages. The main character of this family is that it is adjustable, which supports the users in illuminating different surfaces from one source.

- DRIVERS ARE PROVIDED BY **TRIDONIC**

# Pavo

Pavo Adjustable


## ACU 200901



<b>Wattage</b>	<b>Beam Angle</b>
3x2W	12° 34° 48°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	450 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
<b>Dimension</b>	<b>Cutting Section</b>
L 106 x W 60 x H 50.5 mm	Cut out L 97 x W49 mm



## ACU 200902

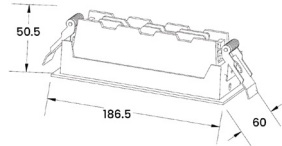


<b>Wattage</b>	<b>Beam Angle</b>
6x2W	12° 24° 34° 48°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	900 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
<b>Dimension</b>	<b>Cutting Section</b>
L 186.5 x W 60 x H 50.5mm	Cut out L 180 x W50 mm



# Pavo

Pavo Wall Washer


## ACU 200903



<b>Wattage</b>	5x2W	<b>Beam Angle</b>	100°
<b>Color Temperature</b>	3000k	<b>Lumen Output</b>	750 Lm
<b>Installation</b>	Recessed	<b>Rated Life Hours</b>	30,000 - 50,000H
<b>CRI</b>	≥90	<b>Colors</b>	<input type="checkbox"/> White
<b>Input Voltage</b>	220V AC (Via the Attached Remote Driver)	<b>Material</b>	Powder Coated Aluminum
<b>Dimension</b>	L 147 x W 45 x H 39 mm	<b>Cutting Section</b>	Cut out L 132 x W36 mm



## ACU 200904



<b>Wattage</b>	10x2W	<b>Beam Angle</b>	100°
<b>Color Temperature</b>	3000k	<b>Lumen Output</b>	1500 Lm
<b>Installation</b>	Recessed	<b>Rated Life Hours</b>	30,000 - 50,000H
<b>CRI</b>	≥90	<b>Colors</b>	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
<b>Input Voltage</b>	220V AC (Via the Attached Remote Driver)	<b>Material</b>	Powder Coated Aluminum
<b>Dimension</b>	L 278 x W 46 x H 36 mm	<b>Cutting Section</b>	Cut out L 269 x W36 mm






## Pavo

Pavo Wall Washer

### ACU 200905

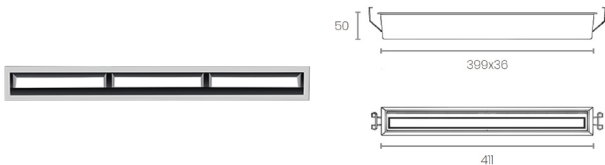


<b>Wattage</b>	15x2W	<b>Beam Angle</b>	100°
<b>Color Temperature</b>	3000k	<b>Lumen Output</b>	2580 Lm
<b>Installation</b>	Recessed	<b>Rated Life Hours</b>	30,000 - 50,000H
<b>CRI</b>	≥90	<b>Colors</b>	<input type="checkbox"/> White
<b>Input Voltage</b>	220V AC (Via the Attached Remote Driver)	<b>Material</b>	Powder Coated Aluminum
<b>Dimension</b>	L 411 x W 36 x H 50 mm	<b>Cutting Section</b>	Cut out L 399 x W 36 mm



## Pavo

Pavo DownLight

### ACU S 18104

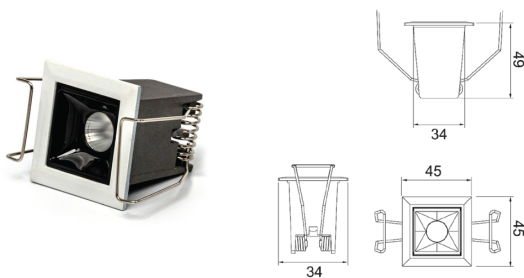


<b>Wattage</b>	10x2W	<b>Beam Angle</b>	12° 30°
<b>Color Temperature</b>	3000k	<b>Lumen Output</b>	185 Lm
<b>Installation</b>	Recessed	<b>Rated Life Hours</b>	30,000 - 50,000H
<b>CRI</b>	≥90	<b>Colors</b>	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
<b>Input Voltage</b>	220V AC (Via the Attached Remote Driver)	<b>Material</b>	Powder Coated Aluminum
<b>Dimension</b>	L 45 x W 45 x H 49 mm	<b>Cutting Section</b>	Cut out L 34 x W 34 mm



# Pavo

Pavo DownLight

## ACU S 18105

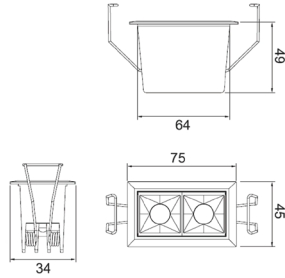


<b>Wattage</b>	2x2W	<b>Beam Angle</b>	12° 30°
<b>Color Temperature</b>	3000k	<b>Lumen Output</b>	370 Lm
<b>Installation</b>	Recessed	<b>Rated Life Hours</b>	30,000 - 50,000H
<b>CRI</b>	≥90	<b>Colors</b>	<input type="checkbox"/> White
<b>Input Voltage</b>	220V AC (Via the Attached Remote Driver)	<b>Material</b>	Powder Coated Aluminum
<b>Dimention</b>	L 75 x W 45 x H 49 mm	<b>Cutting Section</b>	Cut out L 68 x W37 mm



# Pavo

Pavo DownLight

## ACU S 18106

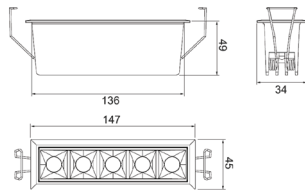

<b>Wattage</b>	5x2W	<b>Beam Angle</b>	12° 30°
<b>Color Temperature</b>	3000k	<b>Lumen Output</b>	825 Lm
<b>Installation</b>	Recessed	<b>Rated Life Hours</b>	30,000 - 50,000H
<b>CRI</b>	≥90	<b>Colors</b>	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
<b>Input Voltage</b>	220V AC (Via the Attached Remote Driver)	<b>Material</b>	Powder Coated Aluminum
<b>Dimention</b>	L 147x W 45x H 49 mm	<b>Cutting Section</b>	Cut out L 140 x W 37 mm






# Pavo

Pavo DownLight

## ACU S 18107

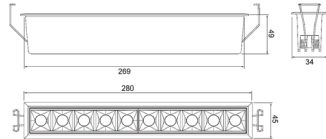


<b>Wattage</b>	10x2 W	<b>Beam Angle</b>	12° 30°
<b>Color Temperature</b>	3000k	<b>Lumen Output</b>	1850 Lm
<b>Installation</b>	Recessed	<b>Rated Life Hours</b>	30,000 - 50,000H
<b>CRI</b>	≥90	<b>Colors</b>	■ Black □ White
<b>Input Voltage</b>	220V AC (Via the Attached Remote Driver)	<b>Material</b>	Powder Coated Aluminum
<b>Dimention</b>	L 280 x W 45 x H 49 mm	<b>Cutting Section</b>	Cut out L 273 x W37 mm



# Pavo

Pavo DownLight

## ACU S 18108

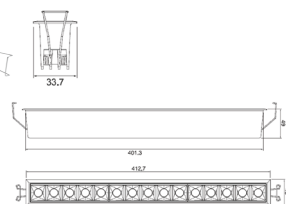

<b>Wattage</b>	15x2 W	<b>Beam Angle</b>	12° 30°
<b>Color Temperature</b>	3000k	<b>Lumen Output</b>	2775 Lm
<b>Installation</b>	Recessed	<b>Rated Life Hours</b>	30,000 - 50,000H
<b>CRI</b>	≥90	<b>Colors</b>	□ White
<b>Input Voltage</b>	220V AC (Via the Attached Remote Driver)	<b>Material</b>	Powder Coated Aluminum
<b>Dimention</b>	L 412.7 x W 45 x H 49 mm	<b>Cutting Section</b>	Cut out L 401.3 x W33.7 mm



# MENSA PLUS


Adjustable spotlight is designed for sophisticated accent lighting—perfectly highlighting art, textures, and architectural beauty. A seamless blend of form and function for discerning interiors.



# RECESSED ADJUSTABLE SPOT LIGHT

Mensa Plus

## ACU RL 245010

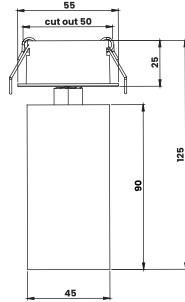


<b>Wattage</b>	<b>Beam Angle</b>
7W	15° 24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	560 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Aluminum



# RECESSED SPOT LIGHT

Mensa Plus

## ACU RL 245011

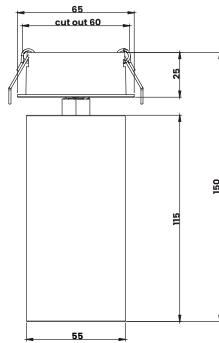


<b>Wattage</b>	<b>Beam Angle</b>
15W	15° 24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1200 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Aluminum



# RECESSED SPOT LIGHT

Mensa Plus

## ACU RL 245012

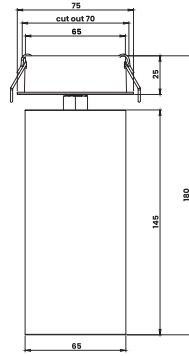

### Wattage

24W

### Beam Angle

15° 24° 38°

### Color Temperature

3000k

### Lumen Output

2040 Lm

### Installation

Recessed

### Rated Life Hours

30,000 - 50,000H

### CRI

≥90

### Colors

■ Black □ White

### Input Voltage

220V AC  
(Via the Attached Remote Driver)

### Material

Aluminum






# SURFACE MOUNTED ADJUSTABLE SPOT LIGHT

Mensa Plus

## ACU SML 245510

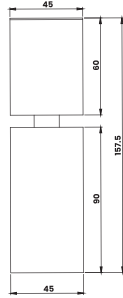


<b>Wattage</b>	<b>Beam Angle</b>
7W	15° 24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	560 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Surface Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Aluminum



# SURFACE MOUNTED SPOT LIGHT

Mensa Plus

## ACU SML 245511

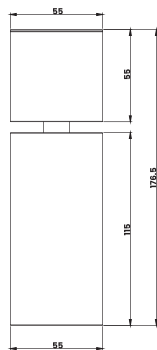


<b>Wattage</b>	<b>Beam Angle</b>
15W	15° 24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1200 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Surface Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Aluminum



# SURFACE MOUNTED SPOT LIGHT

Mensa Plus

## ACU SML 245512

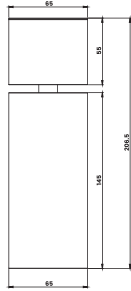

### Wattage

24W

### Beam Angle

15° 24° 38°

### Color Temperature

3000k

### Lumen Output

2040 Lm

### Installation

Surface Mounted

### Rated Life Hours

30,000 - 50,000H

### CRI

≥90

### Colors

■ Black □ White

### Input Voltage

220V AC  
(Via the Attached Remote Driver)

### Material

Aluminum






שאלה  
אם

# TRACK MOUNTED ADJUSTABLE SPOT LIGHT

Mensa Plus

## ACU TL 244010

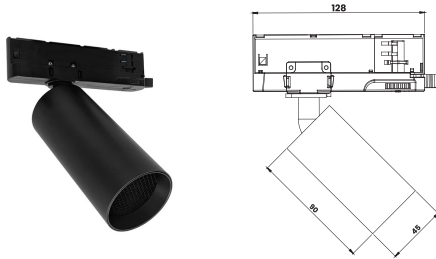


<b>Wattage</b>	<b>Beam Angle</b>
7W	15° 24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	560 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Track Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Aluminum



# TRACK MOUNTED SPOT LIGHT

Mensa Plus

## ACU TL 244011

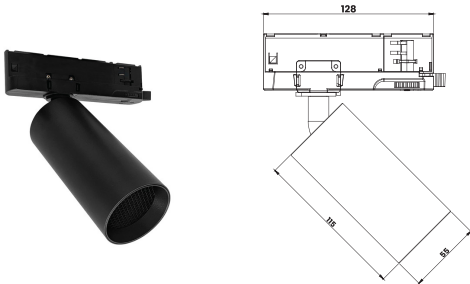


<b>Wattage</b>	<b>Beam Angle</b>
15W	15° 24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1200 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Track Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Aluminum



# TRACK MOUNTED ADJUSTABLE SPOT LIGHT

Mensa Plus

## ACU TL 244012

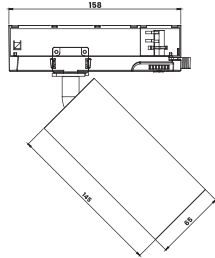

<b>Wattage</b>	<b>Beam Angle</b>
24W	15° 24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	2040 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Track Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Aluminum





# BIANCA


Adjustable spotlight is designed for sophisticated accent lighting—perfectly highlighting art, textures, and architectural beauty. A seamless blend of form and function for discerning interiors.



# Bianca

Surface mounted

## ACU 200101

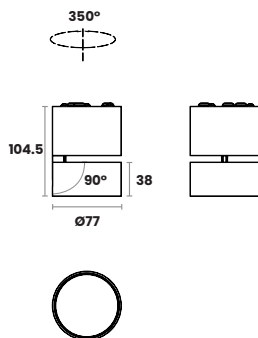

### Wattage

13W

### Beam Angle

12° 25° 38°

### Color Temperature

3000k

### Lumen Output

1079 Lm

### Installation

Surface mounted

### Rated Life Hours

30,000 - 50,000H

### CRI

≥90

### Colors

■ Black □ White

### Input Voltage

220V AC  
(Via the Attached Remote Driver)

### Material


Powder Coated  
Aluminium



# Bianca

Recessed

## ACU 200102

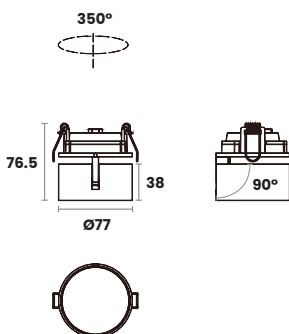

### Wattage

13W

### Beam Angle

12° 25° 38°

### Color Temperature

3000k

### Lumen Output

1079 Lm

### Installation

Recessed

### Rated Life Hours

30,000 - 50,000H

### CRI

≥90

### Colors

■ Black □ White

### Input Voltage

220V AC  
(Via the Attached Remote Driver)

### Material

Powder Coated  
Aluminium

### Cutting Section

Cut out Ø72 mm





# PULSAR

## Mini Spot Light


Mini spotlight provides discreet yet powerful accent lighting—ideal for enhancing textures, artworks, and architectural features with subtle sophistication.



## Pulsar

Single Adjustable Spot Light

### ACU 28101



#### Wattage

2W

#### Beam Angle

15° 24°

#### Color Temperature

3000k

#### Lumen Output

96 Lm

#### Installation

Recessed

#### Rated Life Hours

30,000 - 50,000H

#### CRI

≥90

#### Colors

■ Black □ White

#### Input Voltage

220V AC  
(Via the Attached Remote Driver)

#### Material

Die Casting Aluminium

#### Cutting Section


Cut out  
25 x 25 mm



## Pulsar

Triple Adjustable Spot light

### ACU 28102



#### Wattage

3x2W

#### Beam Angle

15° 24°

#### Color Temperature

3000k

#### Lumen Output

384 Lm

#### Installation

Surface Mounted

#### Rated Life Hours

30,000 - 50,000H

#### CRI

≥90

#### Colors

■ Black □ White

#### Input Voltage

220V AC  
(Via the Attached Remote Driver)

#### Material

Die Casting Aluminium

#### Cutting Section

Cut out  
73 x 25 mm



# PEEK COLLECTION



**PS.** Drivers are included with the lights for all operational functions.



# Peek Series

Adjustable Spot Light

## ACU 230001



Wattage	Beam Angle
---------	------------

3W	15° 24°
----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	148 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------


220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------

Cut out Ø 42 mm
-----------------



## ACU 230002



Wattage	Beam Angle
---------	------------

3W	15° 24°
----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	65 Lm - 78Lm
-------	--------------

Installation	Rated Life Hours
--------------	------------------

Surface Mounted	30,000 - 50,000H
-----------------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------

Cut out Ø 35 mm
-----------------






# Peek Series

Adjustable Spot Light

## ACU 230003



Wattage	Beam Angle
---------	------------

3W	15° 24°
----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	108 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------


220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------

Cut out  
Ø 35 mm



## ACU 230004

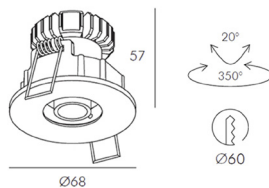

Wattage	Beam Angle
---------	------------

3W	8°
----	----

Color Temperature	Lumen Output
-------------------	--------------

3000k	128 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Surface Mounted	30,000 - 50,000H
-----------------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------


Cut out  
Ø 60 mm



# Peek Series

Adjustable Spot Light

## ACU 230005

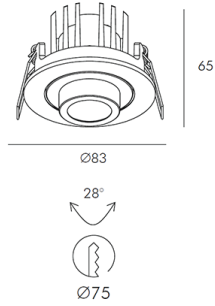

Wattage	Beam Angle
---------	------------

5W	5°
----	----

Color Temperature	Lumen Output
-------------------	--------------

3000k	143 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	■ Black □ White
-----	-----------------

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------

Cut out Ø 75 mm
-----------------



# RAY COLLECTION


**PS.** Drivers are included with the lights for all operational functions.



# Ray Series

Adjustable with Round Frame

## ACU 232001



Wattage	Beam Angle
---------	------------

7W	15° 35°
----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	395 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Material
-----	----------

≥90	Die Casting Aluminium
-----	-----------------------

Input Voltage	
---------------	--


220V AC (Via the Attached Remote Driver)	<input checked="" type="checkbox"/> Black, black <input type="checkbox"/> Black, white
---	---

Cutting Section
-----------------

Cut out Ø75 mm



## ACU 232002



Wattage	Beam Angle
---------	------------

12W	15° 35°
-----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	800 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Material
-----	----------

≥90	Die Casting Aluminium
-----	-----------------------

Input Voltage	Colors
---------------	--------

220V AC (Via the Attached Remote Driver)	<input checked="" type="checkbox"/> Black, black <input type="checkbox"/> Black, white
---	---

Cutting Section
-----------------


Cut out Ø92 mm



# Ray Series

Adjustable with Square Frame

## ACU 232003



Wattage	Beam Angle
---------	------------

1x12W	15° 35°
-------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	800 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------


220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------

Cut out  
100 × 100 mm



## ACU 232004

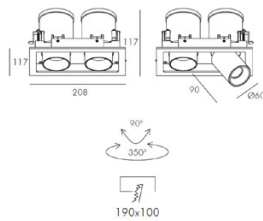

Wattage	Beam Angle
---------	------------

2x12W	15° 35°
-------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	1540 Lm
-------	---------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Material
-----	----------

≥90	Die Casting Aluminium
-----	-----------------------

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	<input checked="" type="checkbox"/> Black, black <input type="checkbox"/> Black, white
---	---

Cutting Section
-----------------


Cut out  
190 × 100 mm



# Ray Series

Adjustable with Round Frame

## ACU 232005



### Wattage

25W

### Beam Angle

15° 45°

### Color Temperature

3000k

### Lumen Output

1910 Lm

### Installation

Recessed

### Rated Life Hours

30,000 - 50,000H

### CRI

≥90

### Material

Die Casting Aluminium

### Input Voltage

220V AC  
(Via the Attached Remote Driver)

■ Black, black  
□ Black, white

### Cutting Section

Cut out Ø140 mm



# ELARA COLLECTION


PS. Drivers are included with the lights for all operational functions.



# Elara Series

Adjustable Spot Light

## ACU 200701



Wattage	Beam Angle
---------	------------

8W	24° 36°
----	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	664 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	■ Black □ White
-----	-----------------

Input Voltage	Material
---------------	----------


220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------

Cut out Ø76 mm
----------------



# SPARK COLLECTION

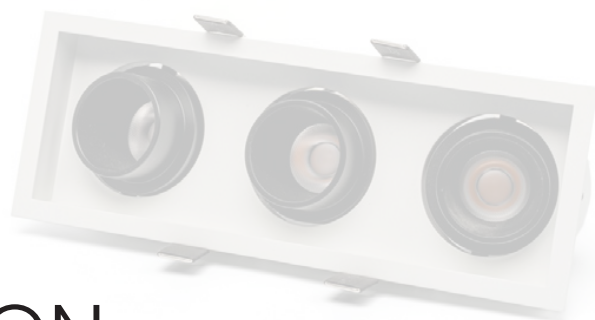


**PS.** Drivers are included with the lights for all operational functions.

## Spark Series

Adjustable with Round Frame

### ACU 231001

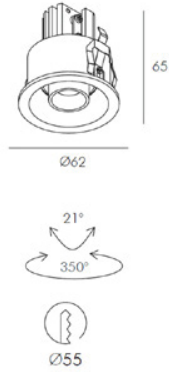

Wattage	Beam Angle
---------	------------

1x7W	20° 30°
------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	358 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------


Cut out Ø55 mm
----------------



## Spark Series

Adjustable with Trimless Frame

### ACU 231002



Wattage	Beam Angle
---------	------------

1x7W	20° 30°
------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	800 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Trim-Less Recessed	30,000 - 50,000H
--------------------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------


Cut out Ø65 mm
----------------



## Spark Series

Adjustable with Trimless Frame

### ACU 231003

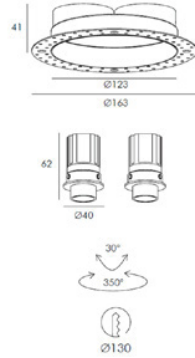

Wattage	Beam Angle
---------	------------

2x7W	20° 30°
------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	744 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Trim-Less Recessed	30,000 - 50,000H
--------------------	------------------

CRI	Colors
-----	--------

≥90	■ Black □ White
-----	-----------------

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------


Cut out Ø130 mm
-----------------



## Spark Series

Adjustable with Square Frame

### ACU 231004



Wattage	Beam Angle
---------	------------

1x7W	20° 30°
------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	800 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Trim-Less Recessed	30,000 - 50,000H
--------------------	------------------

CRI	Colors
-----	--------

≥90	■ Black □ White
-----	-----------------

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------


Cut out 60 × 60 mm
-----------------------



## Spark Series

Adjustable with Rectangular Frame

### ACU 231005



#### Wattage

2x7W

#### Beam Angle

20° 30°

#### Color Temperature

3000k

#### Lumen Output

803 Lm

#### Installation

Recessed

#### Rated Life Hours

30,000 - 50,000H

#### CRI

≥90

#### Material

Die Casting Aluminium

#### Input Voltage

220V AC  
(Via the Attached Remote Driver)

#### Colors

■ Black, black  
□ Black, white

#### Cutting Section


Cut out  
L 115 × W 60 mm



## Spark Series

Adjustable with Round Frame

### ACU 231006



#### Wattage

1x10W

#### Beam Angle

20° 35°

#### Color Temperature

3000k

#### Lumen Output

612 Lm

#### Installation

Trim-Less Recessed

#### Rated Life Hours

30,000 - 50,000H

#### CRI

≥90

#### Colors

■ Black □ White

#### Input Voltage

220V AC  
(Via the Attached Remote Driver)

#### Material

Die Casting Aluminium

#### Cutting Section


Cut out  
Ø75 mm



## Spark Series

Adjustable with Stadium Frame

### ACU 231007



Wattage	Beam Angle
---------	------------

2x10W	20° 35°
-------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	1143 Lm
-------	---------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------


Cut out Ø90 × L 180 mm
---------------------------



## Spark Series

Adjustable with Square Frame

### ACU 231008



Wattage	Beam Angle
---------	------------

1x10W	20° 35°
-------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	612 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Material
-----	----------

≥90	Die Casting Aluminium
-----	-----------------------

Input Voltage
---------------

220V AC (Via the Attached Remote Driver)	<input checked="" type="checkbox"/> Black, black <input type="checkbox"/> Black, white
---	---

Cutting Section
-----------------


Cut out 75 × 75 mm
-----------------------



## Spark Series

Adjustable with Rectangular Frame

### ACU 231009



Wattage	Beam Angle
---------	------------

2x10W	20° 35°
-------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	1143 Lm
-------	---------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Material
-----	----------

≥90	Die Casting Aluminium
-----	-----------------------

Input Voltage	Colors
---------------	--------

220V AC (Via the Attached Remote Driver)	<input checked="" type="checkbox"/> Black, black <input type="checkbox"/> Black, white
---	---

Cutting Section
-----------------


Cut out 150 × 75 mm
------------------------



## Spark Series

Adjustable with Square Frame

### ACU 231010



Wattage	Beam Angle
---------	------------

3x10W	20° 35°
-------	---------

Color Temperature	Lumen Output
-------------------	--------------

3000k	1747 Lm
-------	---------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Die Casting Aluminium
---	-----------------------

Cutting Section
-----------------

Cut out 225 × 75mm
-----------------------



# STEP COLLECTION






**PS.** Drivers are included with the lights for all operational functions.

# Step Series

---

## ACU 237003



Wattage	Beam Angle
---------	------------

3W	110°
----	------

Color Temperature	Lumen Output
-------------------	--------------

3000k	Decorative Lumen Effect
-------	-------------------------

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	■ Black □ White
-----	-----------------

Input Voltage	Material
---------------	----------

220V AC (Built In Driver)	Iron + Aluminum + PC
------------------------------	----------------------

Cutting Section
-----------------

Cut out 86mm
-----------------





# AURIGA

## IP20 LED Strip Light

Indoor strip lighting offers a sleek, modern solution for indirect illumination. It is easy to install, energy-efficient, and designed to enhance any interior space with subtle, continuous lighting.






# Auriga

LED SMD Strip Light


## ACU ST 17041

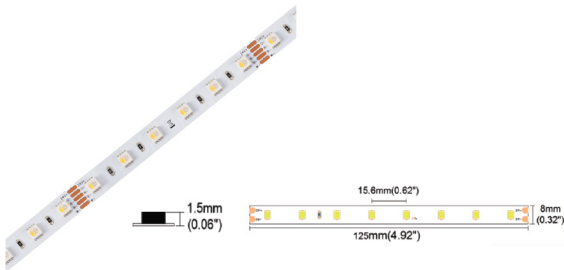

<b>Wattage</b>	<b>Beam Angle</b>
19.2 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
RGBW3000	700 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimension</b>	<b>Cutting Section</b>
W 12mm x H 2.1mm, L-5000mm	100mm / 6 Leds



## ACU ST 17047

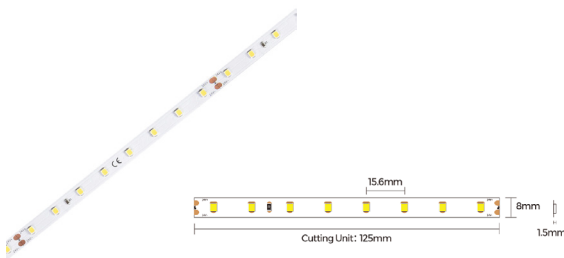


<b>Wattage</b>	<b>Beam Angle</b>
4.8 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	540 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimension</b>	<b>Cutting Section</b>
W 8mm x H 1.5mm, L-5000mm	125mm / 8 Leds



# Auriga

LED SMD Strip Light


## ACU ST 17048

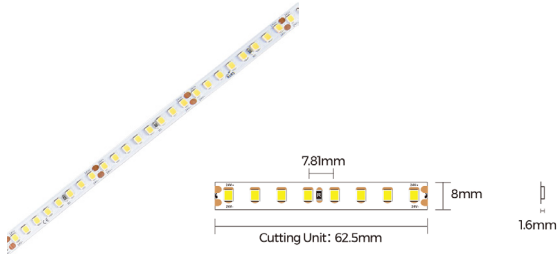

<b>Wattage</b>	<b>Beam Angle</b>
9.6 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	1090 Lm/m
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimension</b>	<b>Cutting Section</b>
W 8mm x H 1.6mm, L-5000mm	62.5mm / 8 Leds



## ACU ST 17049C

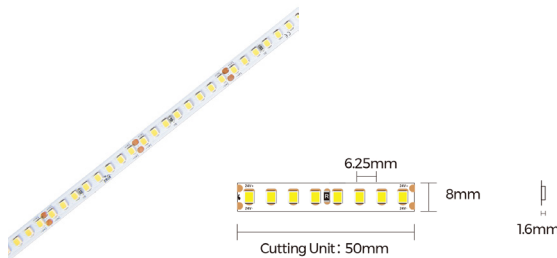


<b>Wattage</b>	<b>Beam Angle</b>
14.4 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000K	1585 Lm/m
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimension</b>	<b>Cutting Section</b>
W 8mm x H 1.6mm, L-5000mm	50mm / 8 Leds



# Auriga

LED COB Strip Light

## ACU ST 202003

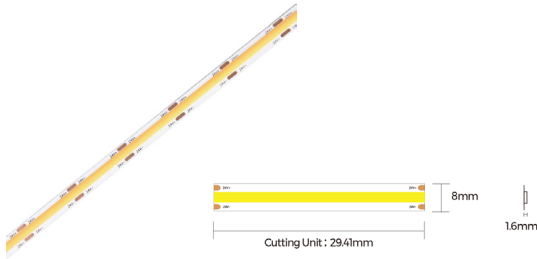

<b>Wattage</b>	<b>Beam Angle</b>
10 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
RGBW3000	980 Lm/m
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimension</b>	<b>Cutting Section</b>
W 8mm x H 1.6mm, L-5000mm	29.41 mm



## ACU ST 202004



<b>Wattage</b>	<b>Beam Angle</b>
5 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	450 Lm/m
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimension</b>	<b>Cutting Section</b>
W 8mm x H 1.6mm, L-5000mm	29.41 mm



# AURIGA

## IP67 LED Strip Light

Outdoor strip lighting offers a sleek, modern solution for indirect illumination. It is easy to install, energy-efficient, and designed to enhance any exterior space with subtle, continuous lighting.






# Auriga

LED SMD Strip Light


## ACU ST 17058

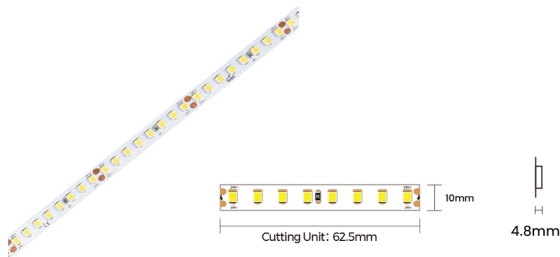

<b>Wattage</b>	<b>Beam Angle</b>
9.6 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	960 Lm/m
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimension</b>	<b>Cutting Section</b>
W 10mm x H 4.8mm, L-5000mm	62.5mm / 8 Leds



## ACU ST 17059C

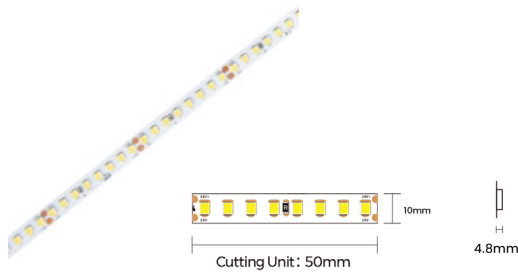


<b>Wattage</b>	<b>Beam Angle</b>
14.4 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1395 Lm/m
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimension</b>	<b>Cutting Section</b>
W 8mm x H 1.6mm, L-5000mm	50mm / 8 Leds



# Auriga

LED SMD Strip Light


## ACU ST 17059

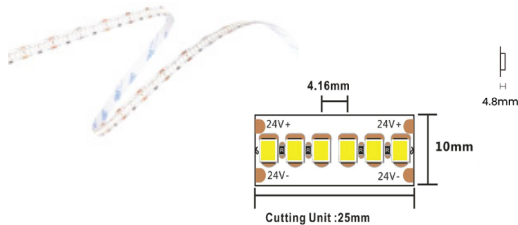

<b>Wattage</b>	<b>Beam Angle</b>
19 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1445 Lm/m
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimention</b>	<b>Cutting Section</b>
W 10mm x H 4.8mm, L-5000mm	25mm / 25 Leds



## ACU ST 202101

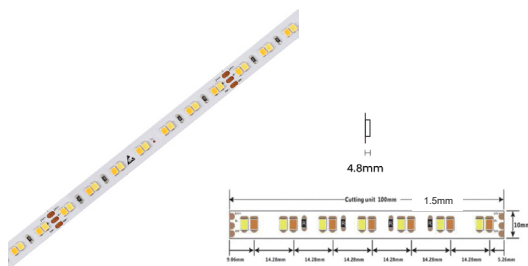


<b>Wattage</b>	<b>Beam Angle</b>
19.2 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
Tunable 2700K-6000K	1505 Lm/m
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimention</b>	<b>Cutting Section</b>
W 10mm x H 1.5mm, L-5000mm	100mm / 14 Leds



# Auriga

LED SMD Strip Light

## ACU ST 202102

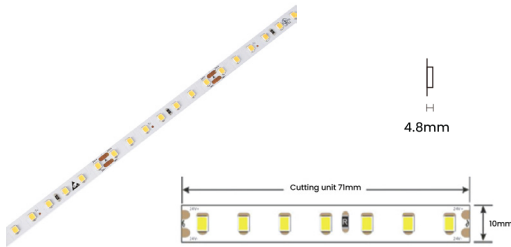


<b>Wattage</b>	<b>Beam Angle</b>
10.1 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
1900K Amber	830 Lm/m
2300K Amber	705 Lm/m
6000K	906 Lm/m
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimension</b>	<b>Cutting Section</b>
W 10mm x H 4.8mm, L-5000mm	71.43mm / 7 Leds



# Auriga

LED COB Strip Light

## ACU ST 202001

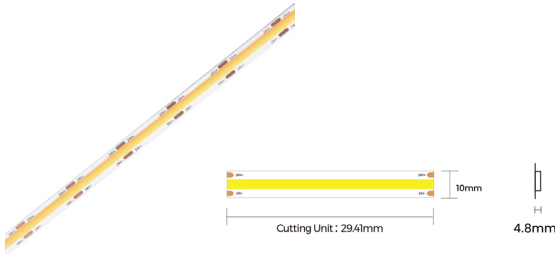

<b>Wattage</b>	<b>Beam Angle</b>
10 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	790 Lm/m
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimension</b>	<b>Cutting Section</b>
W 10mm x H 4.8mm, L-5000mm	29.41 mm




## ACU ST 202002



<b>Wattage</b>	<b>Beam Angle</b>
5 W/m	120°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	410 Lm/m
<b>Installation</b>	<b>Rated Life Hours</b>
Strip Light Accessories Profile & Clips	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> Transparent
<b>Input Voltage</b>	<b>Material</b>
24V DC	Strip Light
<b>Dimension</b>	<b>Cutting Section</b>
W 10mm x H 4.8mm, L-5000mm	29.41mm



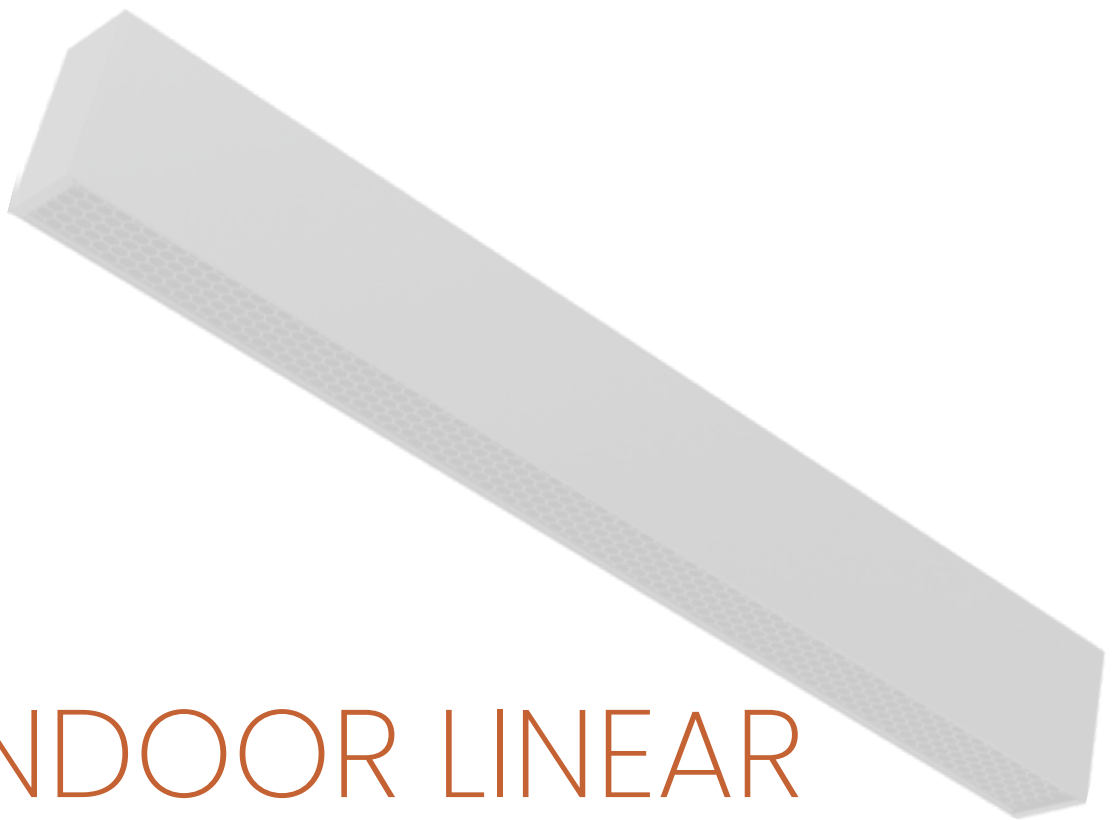

# INDOOR LINEAR

Indoor linear lighting with an anti-glare diffuser ensures smooth, comfortable illumination while minimizing eye strain—perfect for modern, functional spaces.




INDOOR LINEAR  
**Honeycomb Diffuser**

# Surface Mounted | Suspended

Honeycomb Louver

## ACU IL 240101SM



<b>Wattage</b>	<b>Beam Angle</b>
34W	60°x75°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	2085 Lm 2195 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Surface Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum



## ACU IL 240102SM



<b>Wattage</b>	<b>Beam Angle</b>
46W	60°x75°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	2820 Lm 2965 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Surface Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum






# Surface Mounted | Suspended

Honeycomb Louver

## ACU IL 240103SM



<b>Wattage</b>	<b>Beam Angle</b>
51W	60°x75°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	3125Lm 3290 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Surface Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	51W Powder Coated Aluminum



## ACU IL 240104SM



<b>Wattage</b>	<b>Beam Angle</b>
68W	60°x75°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	4165 Lm 4385 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Surface Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	68W Powder Coated Aluminum







INDOOR LINEAR  
**Louver Diffuser**



# Surface Mounted | Suspended

Louver

## ACU IL 240201SM

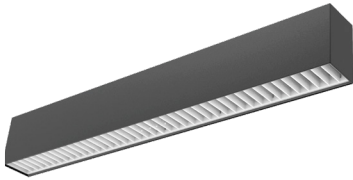

Wattage	Beam Angle
---------	------------

34W	72°
-----	-----

Color Temperature	Lumen Output
-------------------	--------------

3000k	1760 Lm
4000k	1890 Lm

Installation	Rated Life Hours
--------------	------------------

Surface Mounted	30,000 - 50,000H
-----------------	------------------

CRI	Colors
-----	--------



≥90	■ Black
-----	---------

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
---	------------------------



## ACU IL 240202SM

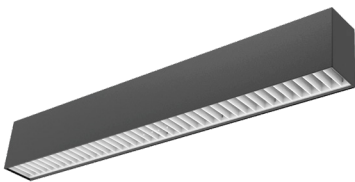

Wattage	Beam Angle
---------	------------

51W	72°
-----	-----

Color Temperature	Lumen Output
-------------------	--------------

3000k	2690 Lm
4000k	2830 Lm

Installation	Rated Life Hours
--------------	------------------

Surface Mounted	30,000 - 50,000H
-----------------	------------------

CRI	Colors
-----	--------

≥90	■ Black
-----	---------

Input Voltage	Material
---------------	----------



220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
---	------------------------



# Surface Mounted | Suspended

Louver

## ACU IL 240203SM

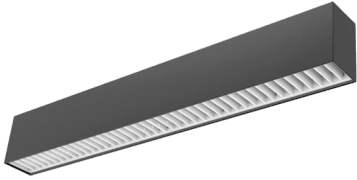

<b>Wattage</b>	<b>Beam Angle</b>
68W	72°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	3550 Lm 3770 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Surface Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum







INDOOR LINEAR  
**Prismatic Diffuser**



# Surface Mounted | Suspended

Prismatic Diffuser



## ACU IL 240301SM

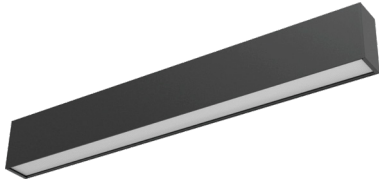

<b>Wattage</b>	<b>Beam Angle</b>
28W	65°x70°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	2745 Lm 2890 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Surface Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum



## ACU IL 240302SM

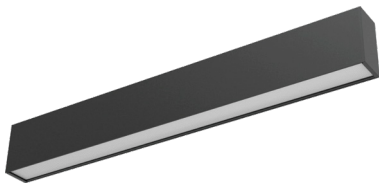



<b>Wattage</b>	<b>Beam Angle</b>
34W	65°x70°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	3335 Lm 3510 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Surface Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum



# Surface Mounted | Suspended

Prismatic Diffuser

## ACU IL 240303SM

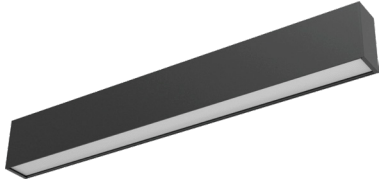

### Wattage

40W

### Beam Angle

65°x70°

### Color Temperature

3000k  
4000k

### Lumen Output

3920 Lm  
4130 Lm

### Installation

Surface Mounted

### Rated Life Hours

30,000 - 50,000H

### CRI

≥90

### Colors

■ Black

### Input Voltage

220V AC  
(Via the Attached Remote Driver)

### Material

Powder Coated  
Aluminum



INDOOR LINEAR  
**Recessed**






# Recessed

Indoor Linear


## ACU IL 240401R



<b>Wattage</b>	<b>Beam Angle</b>
19W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	1900 Lm 2020 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum



## ACU IL 240402R




<b>Wattage</b>	<b>Beam Angle</b>
27W	65°x70°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	2700 Lm 2870 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum



# Recessed

Indoor Linear

## ACU IL 240403R

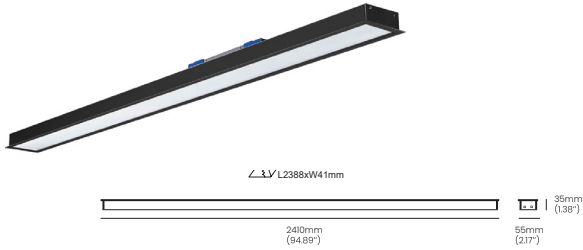

Wattage	Beam Angle
---------	------------

38W	110°
-----	------

Color Temperature	Lumen Output
-------------------	--------------

3000k	3800 Lm
4000k	4040 Lm

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------


≥90	■ Black
-----	---------

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
---	------------------------



## ACU IL 240404R

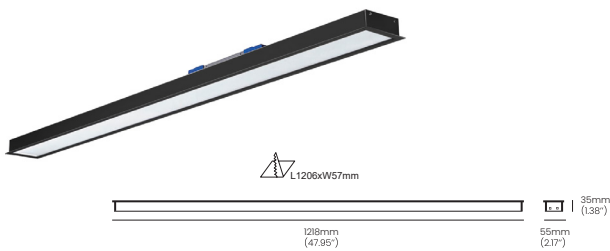

Wattage	Beam Angle
---------	------------

27W	110°
-----	------

Color Temperature	Lumen Output
-------------------	--------------

3000k	2800 Lm
4000k	2980 Lm

Installation	Rated Life Hours
--------------	------------------

Recessed	30,000 - 50,000H
----------	------------------

CRI	Colors
-----	--------

≥90	■ Black
-----	---------

Input Voltage	Material
---------------	----------

220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
---	------------------------



# Recessed

Indoor Linear


## ACU IL 240405R



<b>Wattage</b>	<b>Beam Angle</b>
38W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	3950 Lm 4200 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum



## ACU IL 240406R

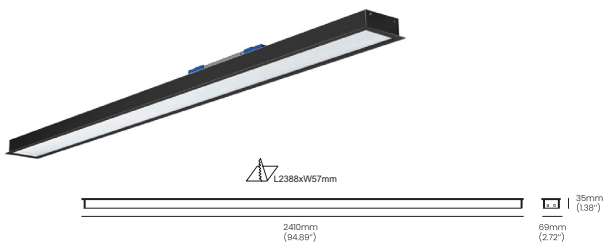


<b>Wattage</b>	<b>Beam Angle</b>
53W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	5510 Lm 5860 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum



# Recessed

Indoor Linear


## ACU IL 240407R

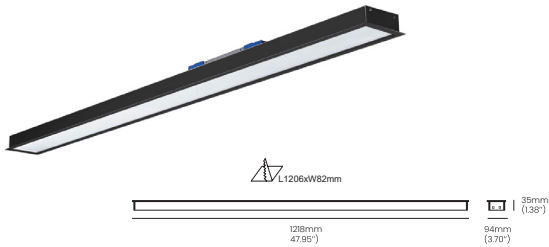

<b>Wattage</b>	<b>Beam Angle</b>
38W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	3950 Lm 4200 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum



## ACU IL 240408R

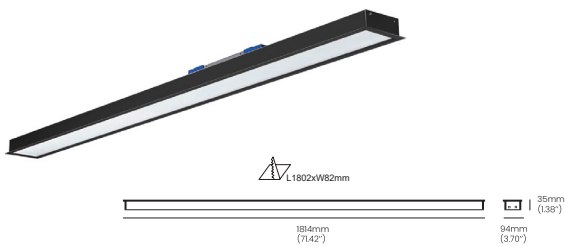



<b>Wattage</b>	<b>Beam Angle</b>
60W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k 4000k	6230 Lm 6630 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Recessed	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Material</b>
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum



# Recessed

Indoor Linear

## ACU IL 240409R

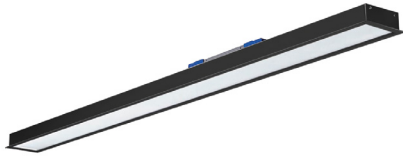

Wattage	Beam Angle
38W	110°
Color Temperature	Lumen Output
3000k	7790 Lm
4000k	8290 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Material
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum






# METEOR MAGNETIC

24V DC

# Grazer Light

Meteor Magnetic



## ACU MM 243010



<b>Wattage</b>	<b>Beam Angle</b>
6W	24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	524 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## ACU MM 243011

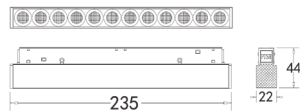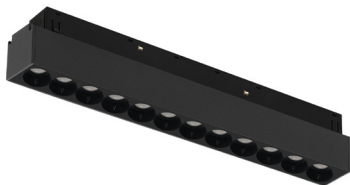

<b>Wattage</b>	<b>Beam Angle</b>
10W	24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1000 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC






# Grazer Light

Meteor Magnetic


## ACU MM 243012



<b>Wattage</b>	<b>Beam Angle</b>
16W	24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1527 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## ACU MM 243013



<b>Wattage</b>	<b>Beam Angle</b>
24W	24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	2012 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC






# Linear Light

Meteor Magnetic



## ACU MM 243020



<b>Wattage</b>	<b>Beam Angle</b>
10W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	864 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## ACU MM 243021

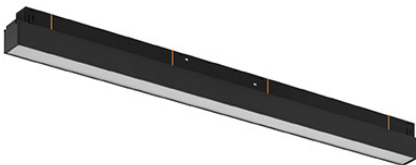


<b>Wattage</b>	<b>Beam Angle</b>
16W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1768 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## Wall Washer

Meteor Magnetic

### ACU MM 243065

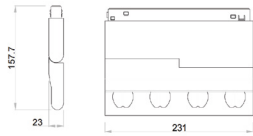


<b>Wattage</b>	<b>Beam Angle</b>
15W	33°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1000 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum



## Spot Light

Meteor Magnetic

### ACU MM 243030



<b>Wattage</b>	<b>Beam Angle</b>
8W	38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1768 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC





# Spot Light

Meteor Magnetic


## ACU MM 243031



<b>Wattage</b>	<b>Beam Angle</b>
2x8W	24° 40°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1329 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## ACU MM 243032

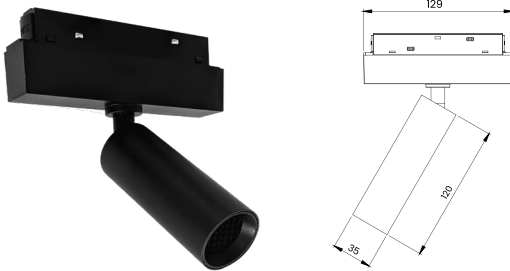

<b>Wattage</b>	<b>Beam Angle</b>
12W	15° 24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1396 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC






# Zoomable Light

Meteor Magnetic


## ACU MM 243034

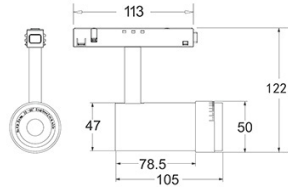

<b>Wattage</b>	<b>Beam Angle</b>
10W	10° to 60°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	739 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## ACU MM 243035




<b>Wattage</b>	<b>Beam Angle</b>
16W	10° to 60°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1484 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



# Wide Spot Light

Meteor Magnetic

## ACU MM 243036




<b>Wattage</b>	<b>Beam Angle</b>
10W	10° 24° 36°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	877 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



# Adjustable Grazer

## ACU MM 243040




<b>Wattage</b>	<b>Beam Angle</b>
6W	24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	469 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC





# Adjustable Grazer


## ACU MM 243041

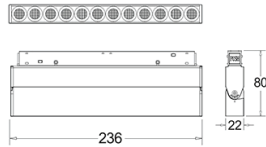

<b>Wattage</b>	<b>Beam Angle</b>
10W	24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1000 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## ACU MM 243042

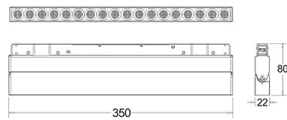

<b>Wattage</b>	<b>Beam Angle</b>
16W	24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1527 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## Adjustable Grazer

### ACU MM 243043




<b>Wattage</b>	<b>Beam Angle</b>
24W	24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	2012 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## Adjustable Linear

### ACU MM 243050

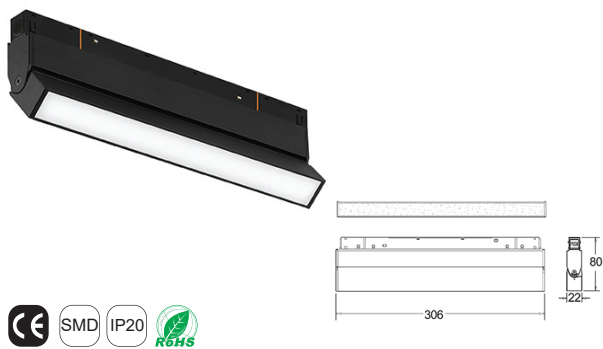

<b>Wattage</b>	<b>Beam Angle</b>
10W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	864 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## Adjustable Grazer

### ACU MM 243051




<b>Wattage</b>	<b>Beam Angle</b>
16W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1786 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## Decorative Lights

### ACU MM 243060

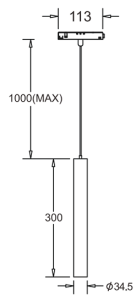


<b>Wattage</b>	<b>Beam Angle</b>
10W	24° 40°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	891 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC





# Decorative Lights


## ACU MM 243061

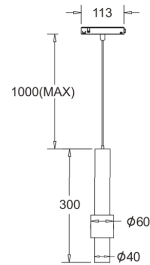

<b>Wattage</b>	<b>Beam Angle</b>
12W	24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	576 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## ACU MM 243062

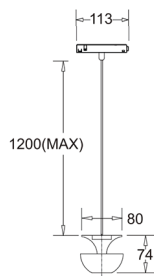


<b>Wattage</b>	<b>Beam Angle</b>
6W	15° 24° 38°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	891 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



## Decorative Lights


### ACU MM 243063



<b>Wattage</b>	<b>Beam Angle</b>
6W	235°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	375 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



### ACU MM 243064



<b>Wattage</b>	<b>Beam Angle</b>
16W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1063 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Magnetic System	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
24V DC	Aluminum + PC



# Magnetic Track & **Accessories**



# Before Gypsum Ceiling

## ACU MMAC 0230BGR

Outer Angle Connector




Materials	Colors
Aluminum	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White


Installation	<input checked="" type="checkbox"/> CE <input type="checkbox"/> IP20 
Magnetic System To Connect Between Two Track Rails Horizontally and Vertically - Outer Side - Ceiling → Wall	

## ACU MMAC 0231BGR

Inner Angle Connector

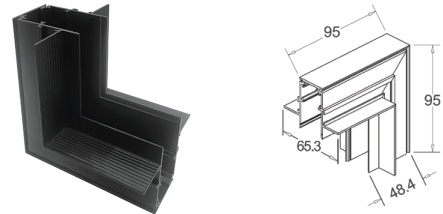


Materials	Colors
Aluminum	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White


Installation	<input checked="" type="checkbox"/> CE <input type="checkbox"/> IP20 
Magnetic System To Connect Between Two Track Rails Horizontally and Vertically - Inner Side - Ceiling → Wall - Wall → Wall	

## ACU MMAC 0236BGR

T Connector

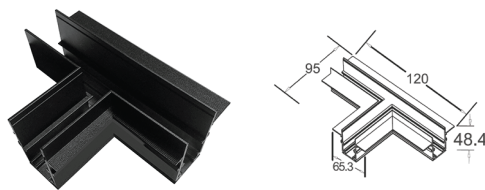


Materials	Colors
Aluminum	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White


Installation	<input checked="" type="checkbox"/> CE <input type="checkbox"/> IP20 
Magnetic System To Connect Between Three Track Rails Horizontally	

## ACU MMAC 0237BGR

X Connector

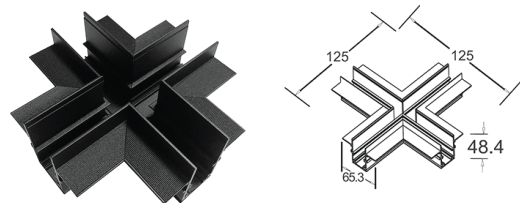


Materials	Colors
Aluminum	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White

Installation	<input checked="" type="checkbox"/> CE <input type="checkbox"/> IP20 
Magnetic System To Connect Between Four Track Rails Horizontally	

# After Gypsum Ceiling

## ACU MMT 001AGR

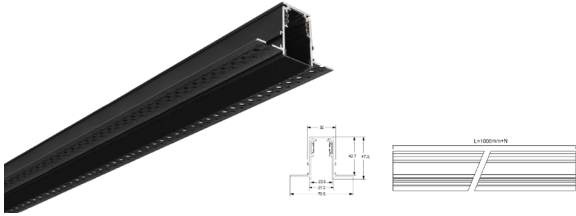

### Installation

Magnetic System

### Colors


■ Black □ White

### Materials

Aluminum + Copper



## ACU MMT 002AGR

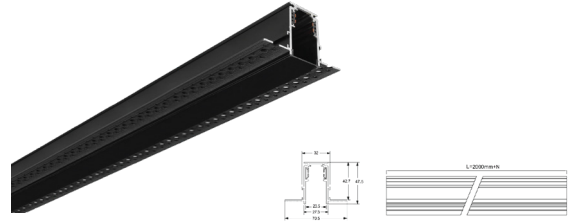

### Installation

Magnetic System

### Colors

■ Black □ White


### Materials

Aluminum + Copper



## ACU MMAC 0229AGR

Right Angle Connector

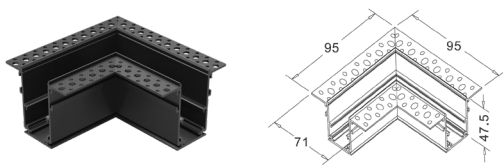

### Installation

Magnetic System

### Colors

■ Black □ White


### Materials

Aluminum



## ACU MMAC 0230AGR

Outer Angle Connector

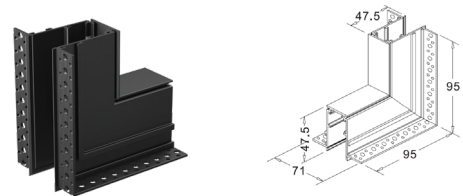

### Installation

Magnetic System

### Colors

■ Black □ White

### Materials


Aluminum



# After Gypsum Ceiling

## ACU MMAC 0231AGR

Inner Angle Connector

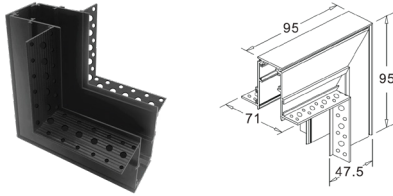

### Installation

Magnetic System

### Colors

■ Black □ White


### Materials

Aluminum



## ACU MMAC 0236AGR

T Connector

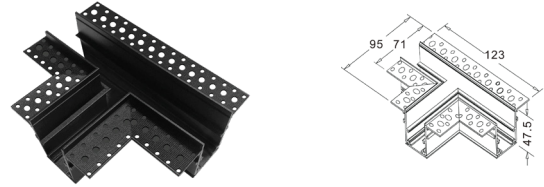

### Installation

Magnetic System

### Colors

■ Black □ White


### Materials

Aluminum



## ACU MMAC 0237AGR

X Connector

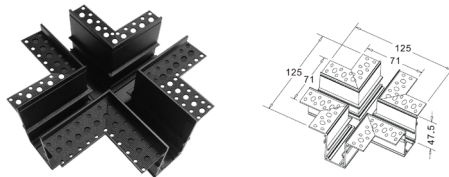

### Installation

Magnetic System

### Colors

■ Black □ White


### Materials

Aluminum



# Surface Mounted

## ACU MMT 001SM

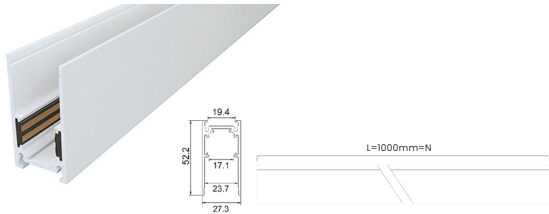

### Installation

Magnetic System

### Colors


■ Black □ White

### Materials

Aluminum + Copper



## ACU MMT 002SM

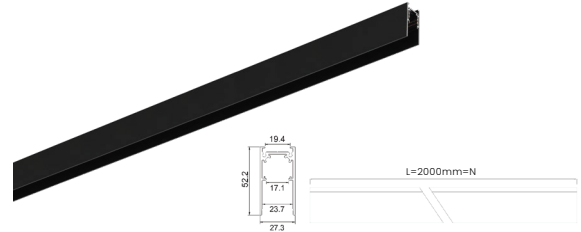

### Installation

Magnetic System

### Colors

■ Black □ White



### Materials

Aluminum + Copper



## ACU MMAC 0226

Right Angle Connector



### Installation

Mini Magnetic System

### Colors

■ Black □ White


### Materials

Aluminum + Copper



## ACU MMAC 0227

Outer Angle Connector



### Installation

Mini Magnetic System

### Colors

■ Black □ White


### Materials

Aluminum + Copper



## ACU MMAC 0228

Inner Angle Connector



### Installation

Mini Magnetic System

### Colors

■ Black □ White


### Materials

Aluminum + Copper



## ACU MMAC 0252

T connector



### Installation

Mini Magnetic System

### Colors

■ Black □ White



### Materials

Aluminum + Copper



## ACU MMAC 0253

X connector



### Installation

Mini Magnetic System

### Colors

■ Black □ White

### Materials


Aluminum + Copper



# POWER

## Accessories

### ACU MMAC 0212

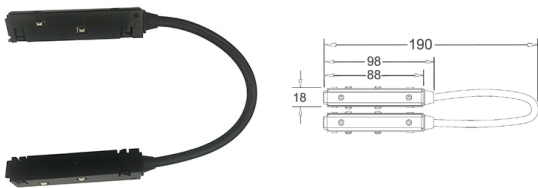

#### Installation


Magnetic System

#### Colors

□ White



### ACU MMAC 0221

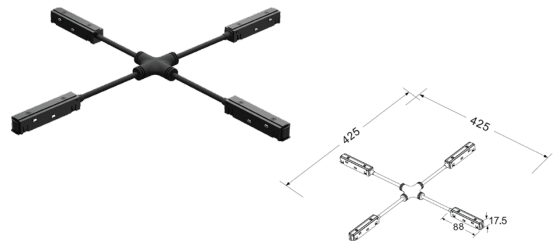

#### Installation

Magnetic System

4-side Power Connector



# Power Accessories

---

## ACU MMAC 0222



### Installation

Magnetic System


### Colors

■ Black □ White

### Power Connector



## ACU MMAC 0223

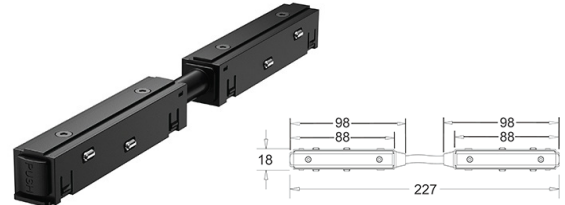

### Installation

Magnetic System


### Colors

■ Black □ White

### Power Connector



## ACU MMAC 0224

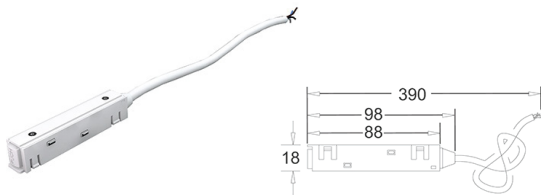

### Installation

Magnetic System

### Materials


Aluminum + Copper

### Power Feeder



# Track Light & Rail Accessories


220V AC

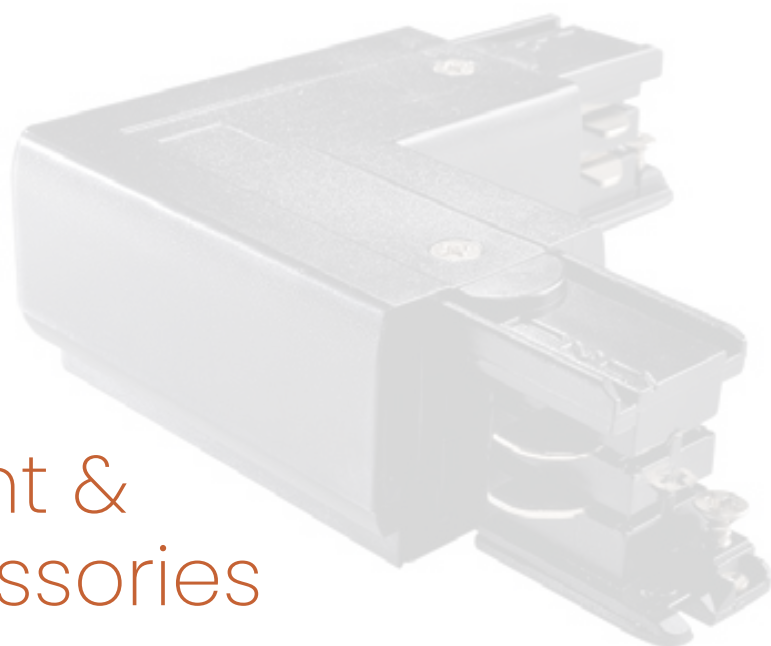

# Mensa Track

Track Rail


## ACU TR 0410R



■ Black □ White

Installation	IP RATE
Recessed	20

## ACU TR 0410S



■ Black □ White

Installation	IP RATE
Surface Mounted	20



# Mensa Track Accessories

---

Power Feeder

## ACU PF 0431-L



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

## ACU PF 0431-R



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

---

## ACU TA 0432

End Cap



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

## ACU TA 0433

Fixed Straight Power Joiner (M & E)



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

## Mensa Track Accessories

---

Power Feeder

### ACU PF 0434

Middle Power Feeder



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

### ACU TA 0434C

Cover for Middle Connector



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

## Mensa Track Accessories

---


Adjustable Connector

### ACU TA 0435 Adj



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

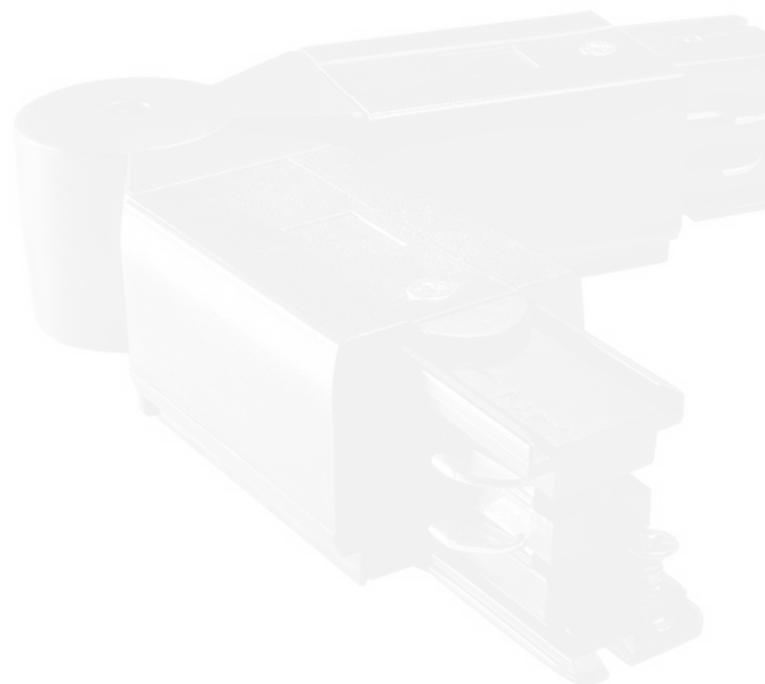

## Mensa Track Accessories

---

L & R Connector Left Side

### ACU TA 0435-L



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

### ACU TA 0435-R



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

## Mensa Track Accessories

---

Cover for L-Connector

### ACU TA 0435C



■ Black □ White


Installation	IP RATE
Accessory with Track Rail	20

## Mensa Track Accessories

---

Twisted T Connector L1 → L2

### ACU TA 0436-L

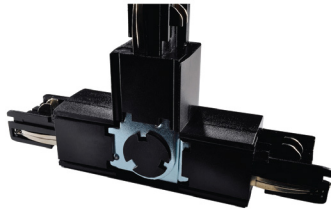

■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

Twisted T Connector R1 → R2

### ACU TA 0436-R



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

## Mensa Track Accessories

---


Cover for T-Connector

### ACU TA 0436C



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

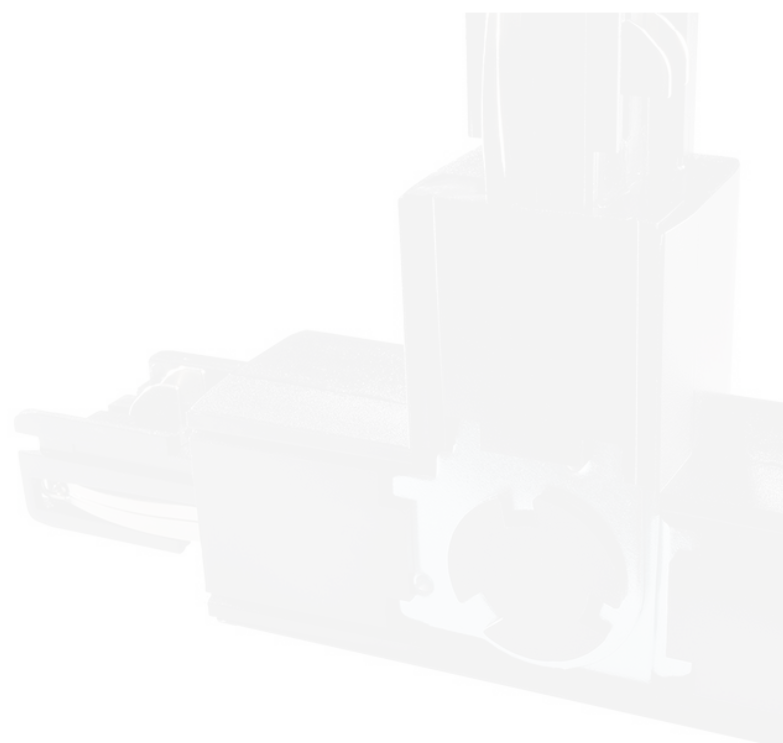

## Mensa Track Accessories

---

### ACU TA 0437

X Connector




■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

### ACU TA 0437C

Cover for X-Connector



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

## Mensa Track Accessories

---

### ACU TA 0438

Twisted L Connector (L & R)



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

### ACU TA 0439

Flexible Track Rail Connector



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

## Mensa Track Accessories

---


Coupler / Fixed Straight Joiner

### ACU TA M0433



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20

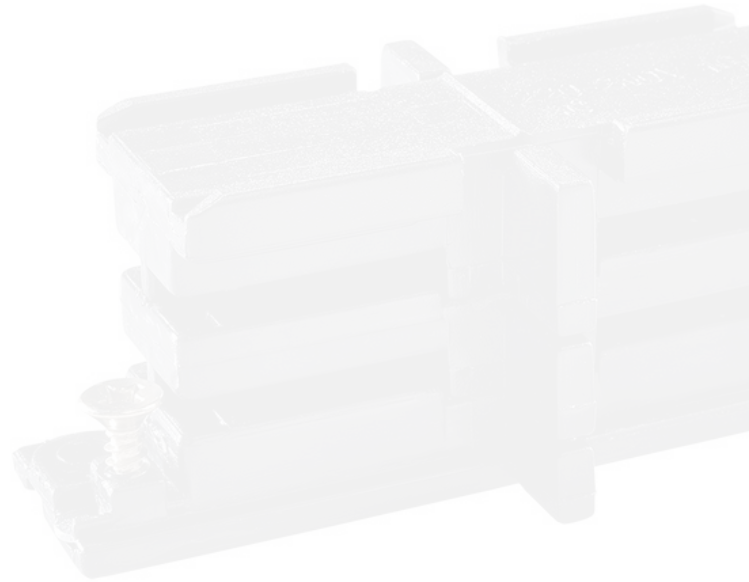

## Mensa Track – DALI

---

Track Rail


### ACU TR 0610R



■ Black □ White

Installation	IP RATE
Recessed	20
DALI	

### ACU TR 0610S



■ Black □ White

Installation	IP RATE
Surface Mounted	20
DALI	

# Mensa Track Accessories – Dali

Power Feeder Left Side – DALI

## ACU PF 0631-L



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20
DALI	

## ACU PF 0631-R



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20
DALI	

## ACU PF 0631C

Cover for Power Feeder – DALI



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20
DALI	

## ACU PF 0634

Middle Power Feeder – DALI




■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20
DALI	

## Mensa Track Accessories – Dali

Coupler / Fixed Straight Power Joiner – DALI

### ACU TA 0633



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20
DALI	

## Mensa Track Accessories – Dali

L Connector Left & Right Side – DALI


### ACU TA 0635-L



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20
DALI	

### ACU TA 0635-R



■ Black □ White


Installation	IP RATE
Accessory with Track Rail	20
DALI	

## Mensa Track Accessories – Dali

---

### ACU TA 0637

X Connector – DALI



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20
DALI	

### ACU TA 0638

Twisted L Connector (L & R) DALI



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20
DALI	

## Mensa Track Accessories – Dali

---

Flexible Connector – DALI

### ACU TA 0639



■ Black □ White

Installation	IP RATE
Accessory with Track Rail	20
DALI	

## Suspension Accessories

---

### ACU SA 04

Mounting Clamp Bracket



■ Black □ White

Installation	IP RATE
Suspension Accessory with Track Rail	20

### ACU SA 0418

Suspension Connection Clamp



■ Black □ White

Installation	IP RATE
Suspension Accessory with Track Rail	20

## Mensa Track Accessories

---

### ACU SH 142

Suspension Hook




■ Black □ White

Installation	IP RATE
Suspension Accessory with Track Rail	20

### ACU SR 0447

Ceiling Rod Suspension Kit



■ Black □ White


Installation	IP RATE
Suspension Accessory with Track Rail	20

## Suspension Accessories

---

Suspension Kit (Wire)

### ACU SW 0448



■ Black □ White

Installation	IP RATE
Suspension Accessory with Track Rail	20

## Mono Track

---

Mono Track

### ACU MT 100



■ Black □ White

Installation	IP RATE
Surface Mounted	20

### ACU MT 150



■ Black □ White

Installation	IP RATE
Surface Mounted	20
DALI	



# PAVO TRACK

Designed for use with 220V AC  
track rail systems






# Track Linear light

Rotatable Linear

## ACU TL 244020

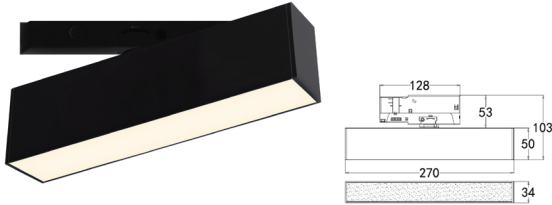

Wattage	Beam Angle
---------	------------

9W	110°
----	------

Color Temperature	Lumen Output
-------------------	--------------

3000k	515 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Track Mounted	30,000 - 50,000H
---------------	------------------

CRI	Colors
-----	--------


≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------

220V AC (with the Attached Built in Driver)	Podwer Coated Aluminum
--	------------------------



## ACU TL 244021

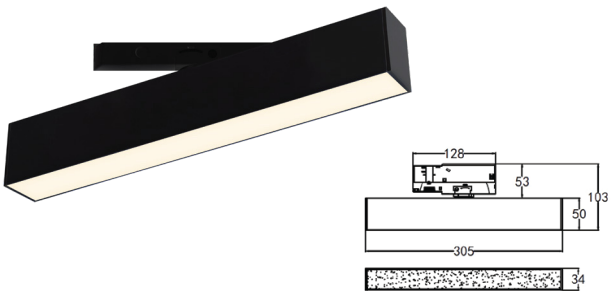

Wattage	Beam Angle
---------	------------

18W	110°
-----	------

Color Temperature	Lumen Output
-------------------	--------------

3000k	1018 Lm
-------	---------

Installation	Rated Life Hours
--------------	------------------

Track Mounted	30,000 - 50,000H
---------------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------


220V AC (with the Attached Built in Driver)	Podwer Coated Aluminum
--	------------------------



# Track Linear light

Rotatable Linear

## ACU TL 244022



### Wattage

24W

### Beam Angle

110°

### Color Temperature

3000k

### Lumen Output

2390 Lm

### Installation

Track Mounted

### Rated Life Hours

30,000 - 50,000H

### CRI

≥90

### Colors

■ Black □ White

### Input Voltage

220V AC  
(with the Attached Built in Driver)

### Material

Podwer Coated  
Aluminum






# Adjustable Linear light

PAVO TRACK

# Track Adjustable Linear light

Adjustable Linear

## ACU TL 244025



Wattage	Beam Angle
---------	------------

9W	110°
----	------

Color Temperature	Lumen Output
-------------------	--------------

3000k	498 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Track Mounted	30,000 - 50,000H
---------------	------------------

CRI	Colors
-----	--------



≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------

220V AC (with the Attached Built in Driver)	Podwer Coated Aluminum
--	------------------------



## ACU TL 244026

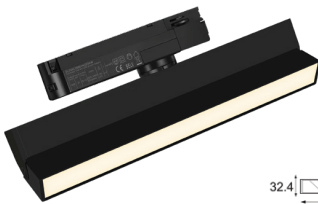

Wattage	Beam Angle
---------	------------

18W	110°
-----	------

Color Temperature	Lumen Output
-------------------	--------------

3000k	1531 Lm
-------	---------

Installation	Rated Life Hours
--------------	------------------

Track Mounted	30,000 - 50,000H
---------------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------


220V AC (with the Attached Built in Driver)	Podwer Coated Aluminum
--	------------------------



# Track Adjustable Linear light

Adjustable Linear

## ACU TL 244027

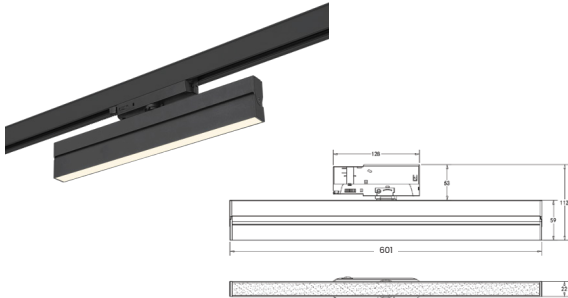

<b>Wattage</b>	<b>Beam angle</b>
24W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1981Lm
4000k	2028Lm
<b>Installation</b>	<b>Rated life hours</b>
Track Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC with (with the Attached Built in Driver)	Podwer Coated Aluminum






# Track Grazer light

Grazer Light

## ACU TL 244030

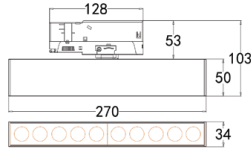

Wattage	Beam Angle
---------	------------

9W	15°, 24°, 38°
----	---------------

Color Temperature	Lumen Output
-------------------	--------------

3000k	521 Lm
-------	--------

Installation	Rated Life Hours
--------------	------------------

Track Mounted	30,000 - 50,000H
---------------	------------------

CRI	Colors
-----	--------


≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------

220V AC (with the Attached Built in Driver)	Podwer Coated Aluminum
--	------------------------



## ACU TL 244031

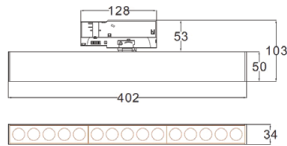

Wattage	Beam Angle
---------	------------

18W	15°, 24°, 38°
-----	---------------

Color Temperature	Lumen Output
-------------------	--------------

3000k	1423 Lm
-------	---------

Installation	Rated Life Hours
--------------	------------------

Track Mounted	30,000 - 50,000H
---------------	------------------

CRI	Colors
-----	--------

≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
-----	--

Input Voltage	Material
---------------	----------


220V AC (with the Attached Built in Driver)	Podwer Coated Aluminum
--	------------------------



# Track Grazer light

Grazer Light

## ACU TL 244032

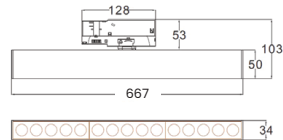

### Wattage

24W

### Beam Angle

15°

### Color Temperature

3000k

### Lumen Output

2108 Lm

### Installation

Track Mounted

### Rated Life Hours

30,000 - 50,000H

### CRI

≥90

### Colors

■ Black □ White

### Input Voltage

220V AC  
(with the Attached Built in Driver)

### Material

Podwer Coated  
Aluminum







# Adjustable Grazer light

PAVO TRACK

# Track Adjustable Grazer light

Adjustable Grazer Light




## ACU TL 244035



<b>Wattage</b>	<b>Beam Angle</b>
9W	15°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	539 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Track Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (with the Attached Built in Driver)	Podwer Coated Aluminum



## ACU TL 244036

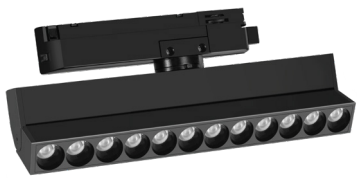

<b>Wattage</b>	<b>Beam Angle</b>
18W	15°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1539 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Track Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (with the Attached Built in Driver)	Podwer Coated Aluminum







# Track Adjustable Grazer light

Adjustable Grazer Light

## ACU TL 244037




<b>Wattage</b>	<b>Beam Angle</b>
24W	15°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	2263 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
Track Mounted	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black □ White
<b>Input Voltage</b>	<b>Material</b>
220V AC (with the Attached Built in Driver)	Podwer Coated Aluminum




# HELENE COLLECTION

**PS.** Drivers are included with the lights for all operational functions.

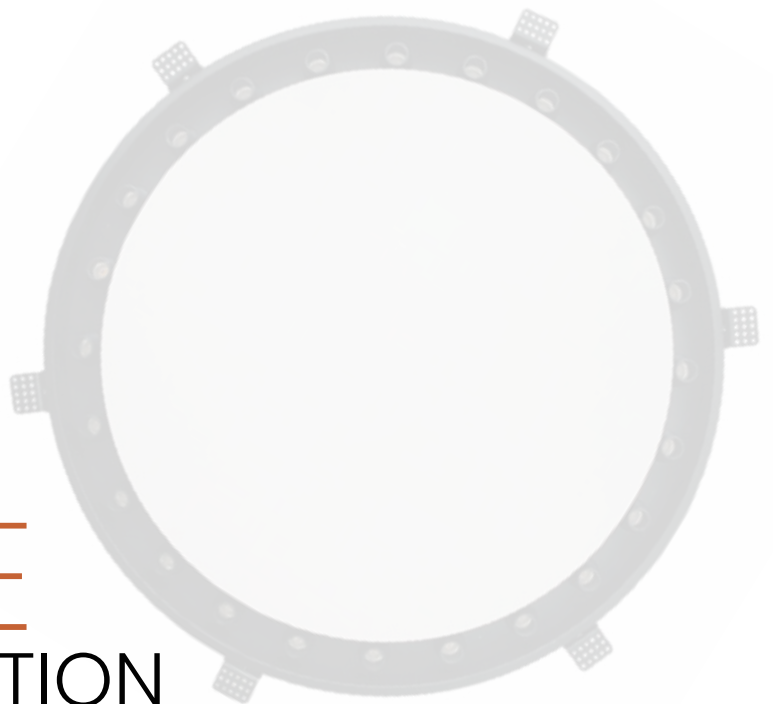

# Helene Series

## ACU 200801

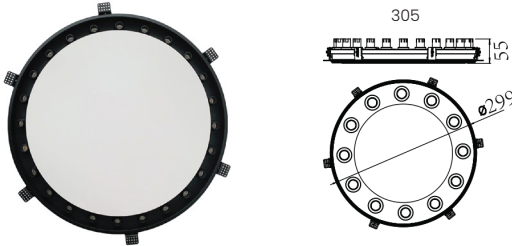

Wattage	Beam Angle
---------	------------

12x2W	12° 24° 36°
-------	-------------

Color Temperature	Lumen Output
-------------------	--------------

3000k	1800 Lm
-------	---------

Installation	Rated Life Hours
--------------	------------------

Trimless Recessed	30,000 - 50,000H
-------------------	------------------

CRI	Colors
-----	--------

≥90	■ Black
-----	---------

Input Voltage	Material
---------------	----------


220V AC (with the Attached Built in Driver)	Powder Coated Aluminium
--	-------------------------

Cutting Section
-----------------

Cut Out  
Ø305mm



## ACU 200802

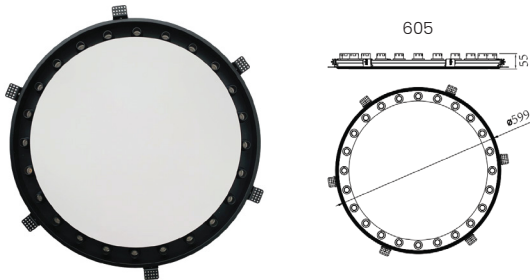

Wattage	Beam Angle
---------	------------

24x2W	12° 24° 36°
-------	-------------

Color Temperature	Lumen Output
-------------------	--------------

3000k	3600 Lm
-------	---------

Installation	Rated Life Hours
--------------	------------------

Trimless Recessed	30,000 - 50,000H
-------------------	------------------

CRI	Colors
-----	--------

≥90	■ Black
-----	---------

Input Voltage	Material
---------------	----------

220V AC (with the Attached Built in Driver)	Powder Coated Aluminium
--	-------------------------

Cutting Section
-----------------


Cut Out  
Ø605mm



# Helene Series

---

## ACU 200803



### Wattage

36x2W

### Beam Angle

12° 24° 36°

### Color Temperature

3000k

### Lumen Output

5400 Lm

### Installation

Trimless Recessed

### Rated Life Hours

30,000 - 50,000H

### CRI

≥90

### Colors

■ Black

### Input Voltage

220V AC  
(with the Attached Built in Driver)

### Material

Powder Coated  
Aluminium

### Cutting Section

Cut Out  
Ø905mm





# PONTO COLLECTION

## 24V DC


Featuring a unified base, effortless installation, and a diverse range that blends general, accent, and decorative lighting—Ponto stands out as the ultimate lighting solution.





## Ponto Base

Trimless
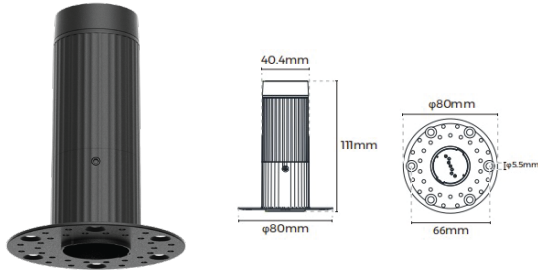
### ACU BS 24000T






<b>Wattage</b>	<b>Rated Current</b>
Up to 72W	3A
<b>Open Size</b>	<b>Input voltage</b>
φ45mm	24V DC Rated
<b>Installation</b>	<b>Maximum load</b>
Trimless	8Kg
<b>Warranty</b>	<b>Colors</b>
5 years	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
 	

## Ponto Base

Recessed
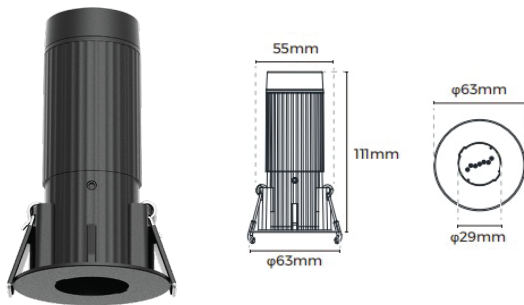
### ACU BSC 24000R




<b>Wattage</b>	<b>Rated Current</b>
Up to 72W	3A
<b>Open Size</b>	<b>Input voltage</b>
φ56mm	24V DC Rated
<b>Installation</b>	<b>Maximum load</b>
Recessed	1Kg
<b>Warranty</b>	<b>Colors</b>
5 years	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
 	

# PONTO SPOT LIGHT

Fixed

## ACU PS 241000




<b>Wattage</b>	<b>Beam Angle</b>
3W	15° 25°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	135 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	
24V DC	



Adjustable

## ACU PTS 241001

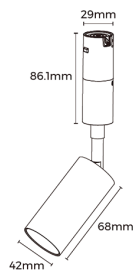


<b>Wattage</b>	<b>Beam Angle</b>
6W	24° 36°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	375 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	
24V DC	



# PONTO SPOT LIGHT

Adjustable

## ACU PTS 241002

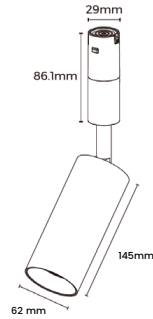


<b>Wattage</b>	<b>Beam Angle</b>
14W	15° 24° 36°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1030 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	
24V DC	



# PONTO ZOOMABLE LIGHT


## ACU PTZ 241101



<b>Wattage</b>	<b>Beam Angle</b>
5W	12°-50°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	282 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	
24V DC	



## ACU PTZ 241102




<b>Wattage</b>	<b>Beam Angle</b>
12W	15°-36°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	660 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	
24V DC	



# PONTO LINEAR

ROUND TUBE LIGHT


## ACU PTL 241201

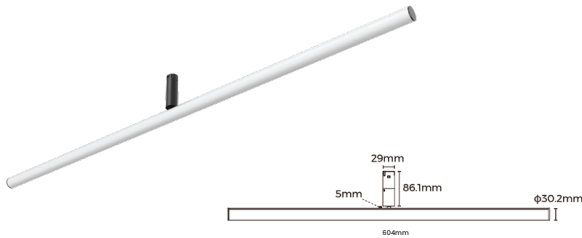

<b>Wattage</b>	<b>Beam Angle</b>
12W	200° x 110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1128 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> White
<b>Input Voltage</b>	<b>Length</b>
24V DC	604 mm



## ACU PTL 241202

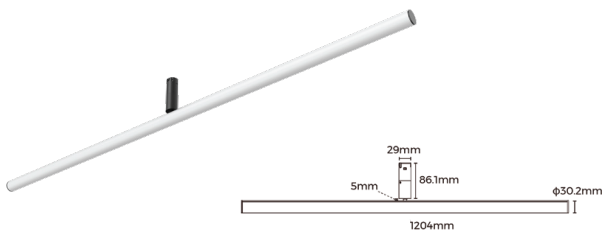


<b>Wattage</b>	<b>Beam Angle</b>
24W	200° x 110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	2256 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> White
<b>Input Voltage</b>	<b>Length</b>
24V DC	1204 mm



# PONTO LINEAR

Normal Diffuser


## ACU PTL 241301

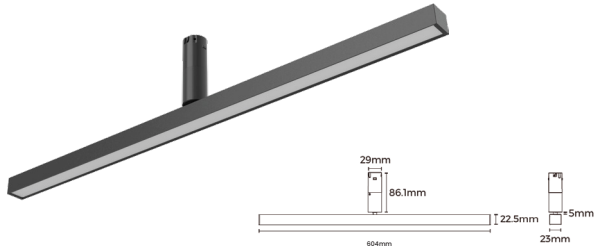

<b>Wattage</b>	<b>Beam Angle</b>
12W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	840 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	604 mm



## ACU PTL 241302

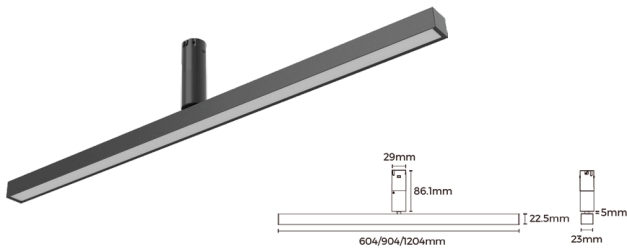


<b>Wattage</b>	<b>Beam Angle</b>
24W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1680 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	1204 mm



# PONTO LINEAR

Prismatic Diffuser


## ACU PTL 241401

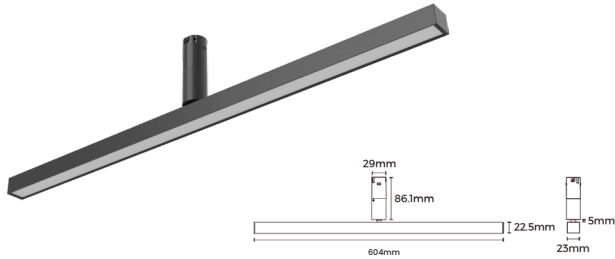

<b>Wattage</b>	<b>Beam Angle</b>
12W	70°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	900 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	604 mm



## ACU PTL 241402

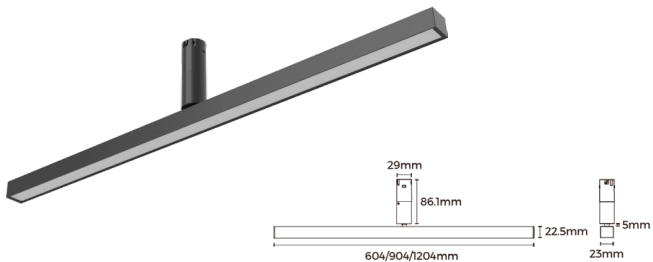


<b>Wattage</b>	<b>Beam Angle</b>
24W	70°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1800 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	1204 mm



# PONTO LINEAR

Grating Diffuser


## ACU PTL 241501

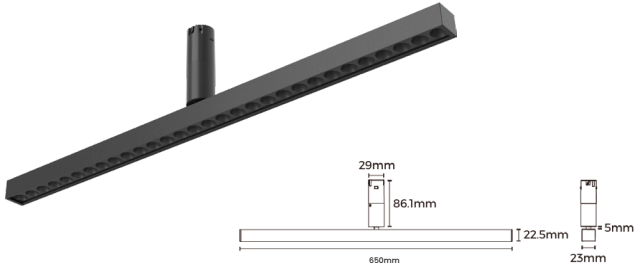

<b>Wattage</b>	<b>Beam Angle</b>
13W	30°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	858 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	650 mm



## ACU PTL 241502

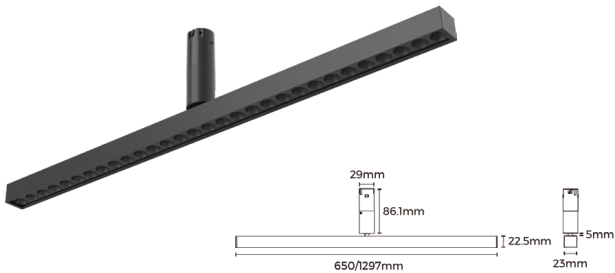


<b>Wattage</b>	<b>Beam Angle</b>
26W	30°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1716 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	1297 mm



# PONTO LINEAR

Asymmetric Diffuser


## ACU PTL 241601

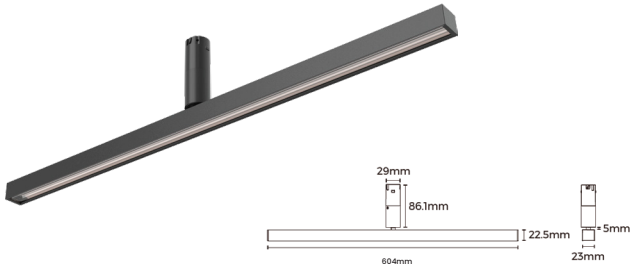

<b>Wattage</b>	<b>Beam Angle</b>
12W	90° x 45° x 15°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1128 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	604 mm



## ACU PTL 241602

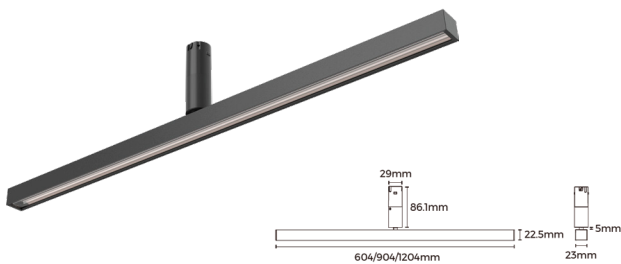


<b>Wattage</b>	<b>Beam Angle</b>
24W	90° x 45° x 15°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	2256 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	1204 mm



# PONTO LINEAR

Double Asymmetric Diffuser


## ACU PTL 241701

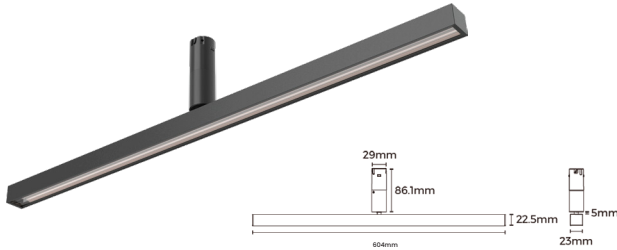

<b>Wattage</b>	<b>Beam Angle</b>
12W	100° x 90° x 15°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1128 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	604 mm



## ACU PTL 241702

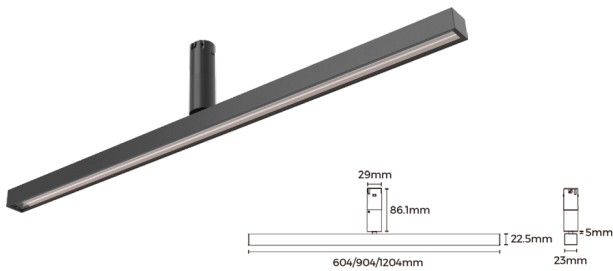


<b>Wattage</b>	<b>Beam Angle</b>
24W	100° x 90° x 15°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	2256 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	1204 mm






**Up-Down**  
Ponto Linear Light

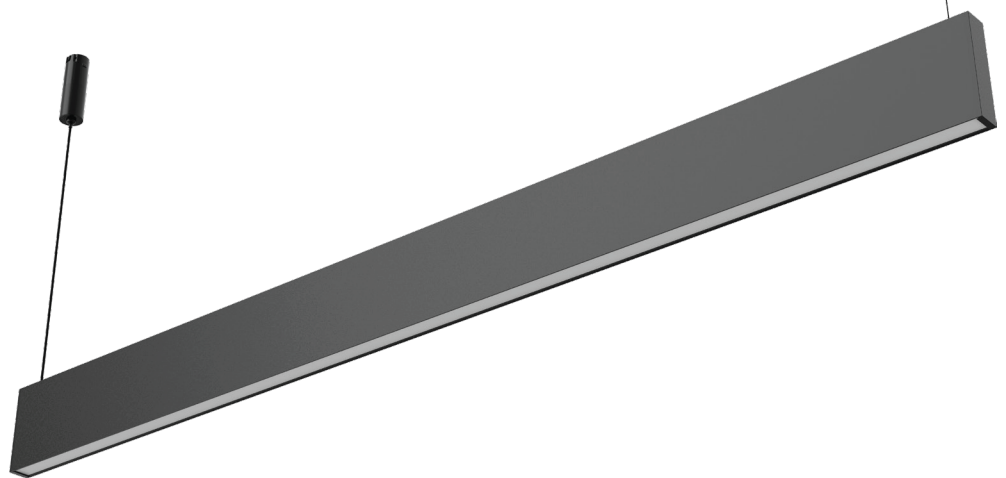

## PONTO LINEAR

Normal Diffuser

### ACU PTL 241801

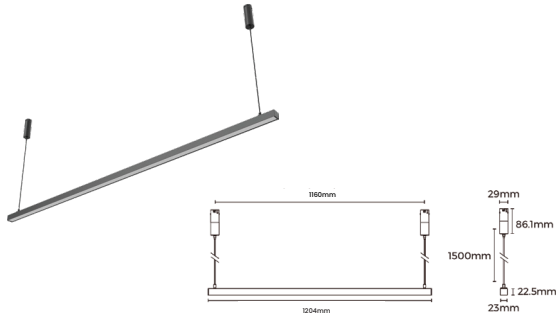


<b>Wattage</b>	<b>Beam Angle</b>
24W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1680 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	1204 mm



## PONTO LINEAR

With Prismatic Diffuser

### ACU PTL 241901

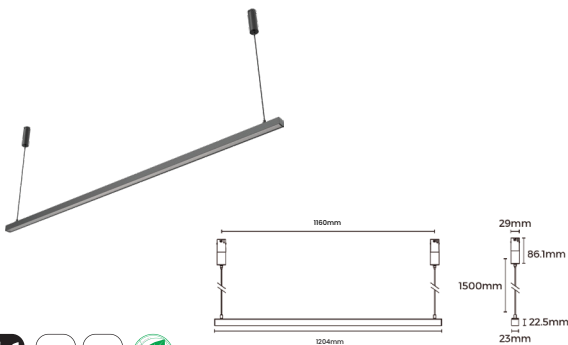


<b>Wattage</b>	<b>Beam Angle</b>
24W	70°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1800 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	1204 mm



# PONTO LINEAR

Grating Diffuser

## ACU PTL 242001

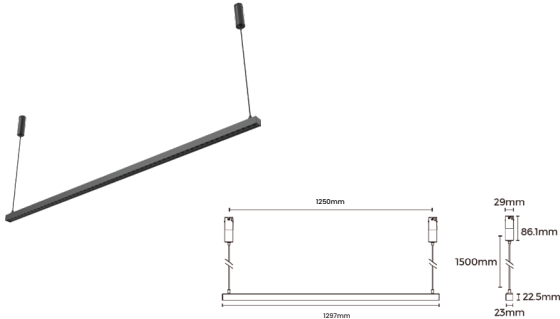


<b>Wattage</b>	<b>Beam Angle</b>
26W	30°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1716 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	1297 mm



# UP-DOWN PONTO LINEAR LIGHT

Normal Diffuser

## ACU PTL 242101

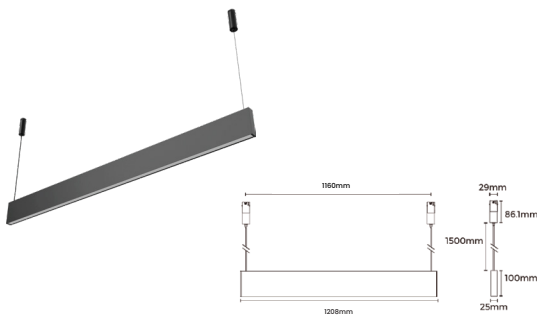


<b>Wattage</b>	<b>Beam Angle</b>
48W	Up: 100° , Down: 100°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	2688 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	1208 mm



## UP-DOWN PONTO LINEAR LIGHT

Prismatic Diffuser

### ACU PTL 242201

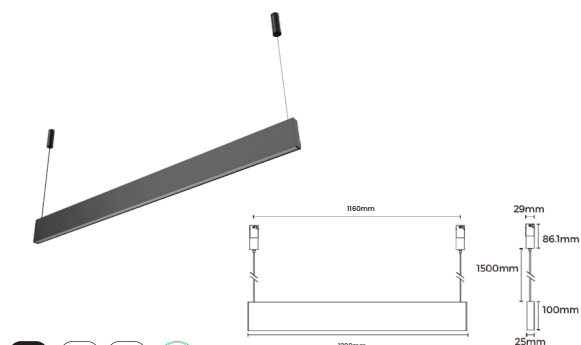


<b>Wattage</b>	<b>Beam Angle</b>
48W	Up: 100° , Down: 100°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	2784 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	1208 mm



## UP-DOWN PONTO LINEAR LIGHT

Grating Diffuser

### ACU PTL 242301

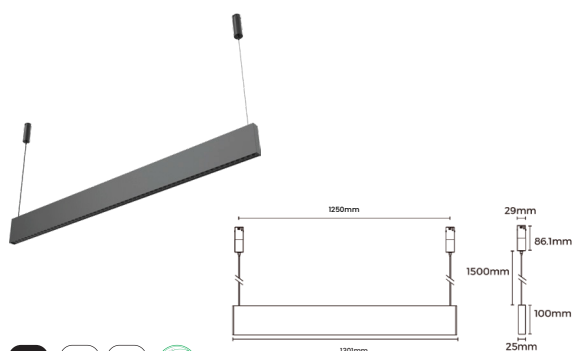


<b>Wattage</b>	<b>Beam Angle</b>
53W	Up:100° , Down: 100°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	2703 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	1301 mm



# PONTO WALL WASHER


## ACU WW 242401

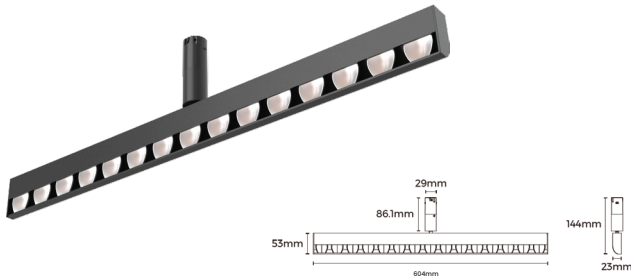

<b>Wattage</b>	<b>Beam Angle</b>
10W	60° X 25° X 73°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	846 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	604 mm



## ACU WW 242402

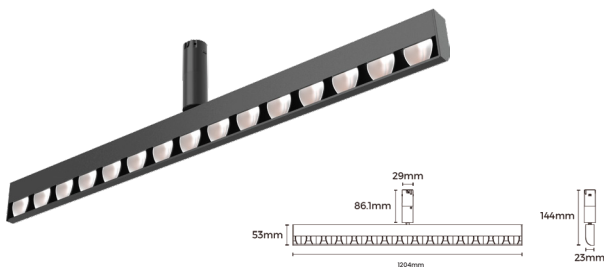

<b>Wattage</b>	<b>Beam Angle</b>
20W	60° X 25° X 73°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	1692 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	1204 mm






# UP-DOWN PONTO LINEAR LIGHT

Prismatic Diffuser


## ACU WW 242501

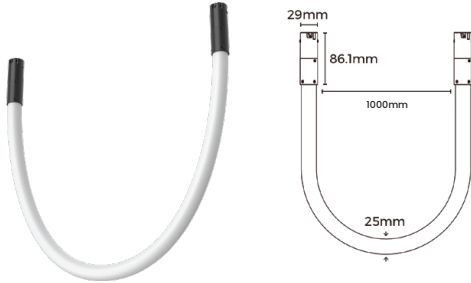

<b>Wattage</b>	<b>Beam Angle</b>
14W	360°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	920 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> White
<b>Input Voltage</b>	<b>Length</b>
24V DC	1000 mm



## ACU WW 242502

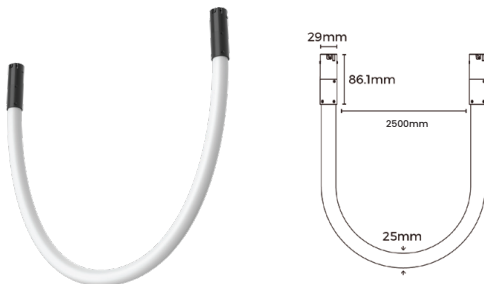



<b>Wattage</b>	<b>Beam Angle</b>
35W	360°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	2300 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> White
<b>Input Voltage</b>	<b>Length</b>
24V DC	2500 mm



# PONTO ROUND LIGHT

Neon Flex

## ACU WW 242503




<b>Wattage</b>	<b>Beam Angle</b>
70W	360°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	4600 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	<input type="checkbox"/> White
<b>Input Voltage</b>	<b>Length</b>
24V DC	5000 mm



# PONTO DECORATIVE


## ACU PTD 242601

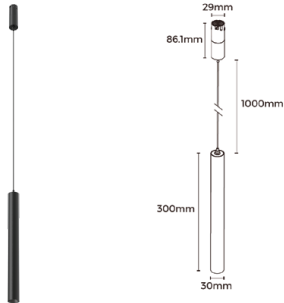

<b>Wattage</b>	<b>Beam Angle</b>
6W	24°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	370 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	ADJ Cable



## ACU PTD 242602

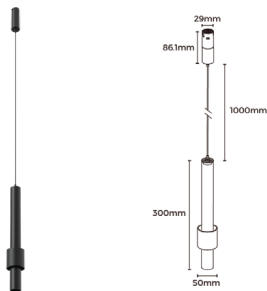

<b>Wattage</b>	<b>Beam Angle</b>
6W	24°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	370 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	ADJ Cable






# PONTO DECORATIVE

Neon Flex

## ACU PTD 242603

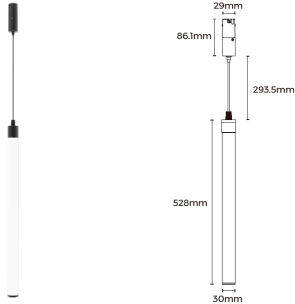

<b>Wattage</b>	<b>Beam Angle</b>
7W	360°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	460 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	ADJ Cable



## ACU PTD 242604




<b>Wattage</b>	<b>Beam Angle</b>
6W	360°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	560 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	ADJ Cable





# PONTO DECORATIVE


## ACU PTD 242605

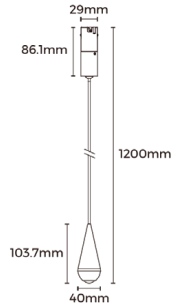

<b>Wattage</b>	<b>Beam Angle</b>
4W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	340 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	ADJ Cable



## ACU PTD 242606



<b>Wattage</b>	<b>Beam Angle</b>
3W	110°
<b>Color Temperature</b>	<b>Lumen Output</b>
3000k	170 Lm
<b>Installation</b>	<b>Rated Life Hours</b>
On Recessed Base	30,000 - 50,000H
<b>CRI</b>	<b>Colors</b>
≥90	■ Black
<b>Input Voltage</b>	<b>Length</b>
24V DC	ADJ Cable







