



Pavo Collection

Indoor Lighting

ACUMEN

www.acumenlight.com



Pavo, This family is specialized in residential and hospitality applications because of its high efficiency, variety of beam angles, and wattages. The main character of this family is that it is adjustable, which supports the users in illuminating different surfaces from one source.

- DRIVERS ARE PROVIDED BY **TRIDONIC**

Pavo

Pavo Adjustable


ACU 200901

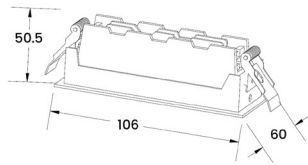

Wattage	Beam Angle
3x2W	12° 34° 48°
Color Temperature	Lumen Output
3000k	450 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	<input type="checkbox"/> White
Input Voltage	Material
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
Dimension	Cutting Section
L 106 x W 60 x H 50.5 mm	Cut out L 97 x W49 mm



ACU 200902

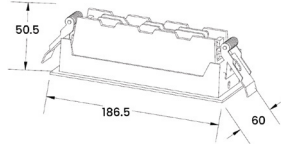


Wattage	Beam Angle
6x2W	12° 24° 34° 48°
Color Temperature	Lumen Output
3000k	900 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
Input Voltage	Material
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
Dimension	Cutting Section
L 186.5 x W 60 x H 50.5mm	Cut out L 180 x W50 mm



Pavo

Pavo Wall Washer


ACU 200903



Wattage	Beam Angle
5x2W	100°
Color Temperature	Lumen Output
3000k	750 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	<input type="checkbox"/> White
Input Voltage	Material
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
Dimension	Cutting Section
L 147 x W 45 x H 39 mm	Cut out L 132 x W36 mm



ACU 200904



Wattage	Beam Angle
10x2W	100°
Color Temperature	Lumen Output
3000k	1500 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
Input Voltage	Material
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
Dimension	Cutting Section
L 278 x W 46 x H 36 mm	Cut out L 269 x W36 mm






Pavo

Pavo Wall Washer

ACU 200905

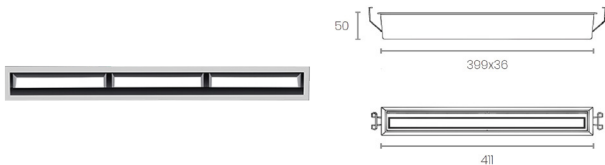


Wattage	15x2W	Beam Angle	100°
Color Temperature	3000k	Lumen Output	2580 Lm
Installation	Recessed	Rated Life Hours	30,000 - 50,000H
CRI	≥90	Colors	<input type="checkbox"/> White
Input Voltage	220V AC (Via the Attached Remote Driver)	Material	Powder Coated Aluminum
Dimension	L 411 x W 36 x H 50 mm	Cutting Section	Cut out L 399 x W 36 mm



Pavo

Pavo DownLight

ACU S 18104

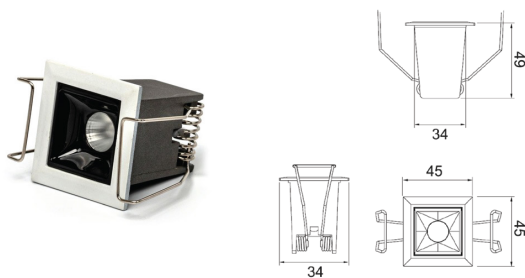


Wattage	10x2W	Beam Angle	12° 30°
Color Temperature	3000k	Lumen Output	185 Lm
Installation	Recessed	Rated Life Hours	30,000 - 50,000H
CRI	≥90	Colors	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
Input Voltage	220V AC (Via the Attached Remote Driver)	Material	Powder Coated Aluminum
Dimension	L 45 x W 45 x H 49 mm	Cutting Section	Cut out L 34 x W 34 mm



Pavo

Pavo DownLight

ACU S 18105

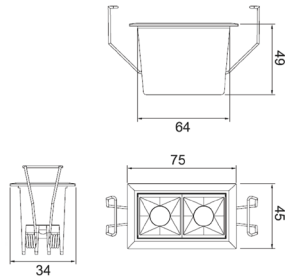


Wattage	Beam Angle
2x2W	12° 30°
Color Temperature	Lumen Output
3000k	370 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	<input type="checkbox"/> White
Input Voltage	Material
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
Dimension	Cutting Section
L 75 x W 45 x H 49 mm	Cut out L 68 x W37 mm



Pavo

Pavo DownLight

ACU S 18106

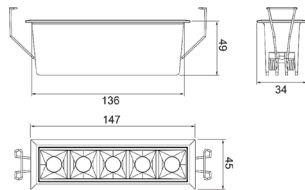

Wattage	Beam Angle
5x2W	12° 30°
Color Temperature	Lumen Output
3000k	825 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White
Input Voltage	Material
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum
Dimension	Cutting Section
L 147x W 45x H 49 mm	Cut out L 140 x W 37 mm






Pavo

Pavo DownLight

ACU S 18107

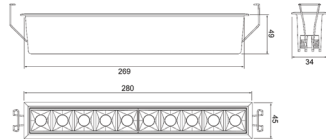


Wattage	10x2 W	Beam Angle	12° 30°
Color Temperature	3000k	Lumen Output	1850 Lm
Installation	Recessed	Rated Life Hours	30,000 - 50,000H
CRI	≥90	Colors	■ Black □ White
Input Voltage	220V AC (Via the Attached Remote Driver)	Material	Powder Coated Aluminum
Dimention	L 280 x W 45 x H 49 mm	Cutting Section	Cut out L 273 x W37 mm



Pavo

Pavo DownLight

ACU S 18108

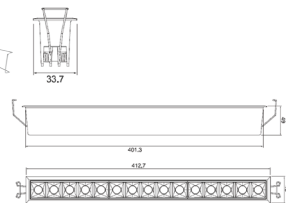

Wattage	15x2 W	Beam Angle	12° 30°
Color Temperature	3000k	Lumen Output	2775 Lm
Installation	Recessed	Rated Life Hours	30,000 - 50,000H
CRI	≥90	Colors	□ White
Input Voltage	220V AC (Via the Attached Remote Driver)	Material	Powder Coated Aluminum
Dimention	L 412.7 x W 45 x H 49 mm	Cutting Section	Cut out L 401.3 x W33.7 mm



