

GENERAL CATALOGUE

ACUMEN LIGHT

Welcome to

ACUMEN LIGHT'S General Catalogue



ACUMEN LIGHT

Acumen Light was founded on the belief that light is more than a technical element. It shapes how a space is experienced, felt, and remembered. The right light is not always the brightest light. It is the light that understands the space.

It highlights what deserves attention, softens what should remain calm, guides movement, creates comfort, and gives every detail its presence. It can make a material feel warmer, an artwork come alive, a façade speak at night, or a room feel completely different from morning to evening.



THE RIGHT LIGHT

The right light is not only about how a fixture looks, but how it performs, how long it lasts, how much energy it consumes, and how well it responds to the needs of the space.

Our LED lighting solutions are selected to offer strong performance with lower energy consumption compared to traditional lighting systems, while supporting long lifespan, minimal maintenance, and consistent quality over time. Because every project is different, our fixtures can also be customized when needed, allowing the lighting solution to respond to the design intent, site condition, and technical requirements of the space.

Acumen lighting fixtures are compatible with major control systems, including 0–10V, 1–10V, phase dimming, and DALI. This gives every project more flexibility in creating scenes, adjusting atmosphere, improving comfort, and managing energy use with greater control.

For us, responsible lighting is not a claim. It is a way of choosing better: better performance, better control, better durability, and **the right fixture in the right place.**

THE JOURNEY

Every project follows a clear journey: We begin by understanding the space, its architecture, its function, and the atmosphere it needs. From there, we evaluate where light can add value, then select the right fixtures, accessories, and control options to serve the design intent.

Our team supports the lighting layout, supplies the required products, and supervises installation when needed, ensuring that the concept is translated into a practical and reliable lighting solution.

We work with trusted international manufacturers and carefully selected components to support smooth operation, long term quality, and consistent performance.

Our LED lighting products are supported with a 5-year warranty, giving every project confidence from installation to operation.

In every step, the purpose remains the same:

Placing the right light in the right place.

TABLE OF CONTENTS

INDOOR LIGHTING

Downlight & Spotlight

- Modular
- Leo IP
- Nero
- Vega C
- Mega
- Pavo
- Mensa Plus
- Bianca
- Pulsar
- Peek
- Ray
- Spark
- Velora
- Velora C
- Step

Auriga IP20

Indoor Linear

Meteor Magnetic

- Power Accessories

Track Light & Rail 220V AC

- Pavo Track

Helene

Ponto

FEATURED DESIGN COLLECTION

- Elara
- Drop
- Moonline
- Sleek
- Glance
- Orion

Miralo

Water Ripple Light

OUTDOOR LIGHTING

- Auriga IP67
- Uplight
- Outdoor Linear
- Drive-Over
- Stair light
- Wall Light
- Downlight
- NeonFlex
- Projector
- Bollard

UNDERWATER LIGHTING

- UnderWater Spotlight
- UnderWater Linear
- UnderWater Neon Flex

INDOOR LIGHTING




The Indoor Collection is designed to respond to the different layers of interior lighting from visual comfort and functionality to atmosphere, focus, and architectural expression.

It brings together a wide range of indoor lighting solutions with diverse light effects, including downlights, spotlights, wall washers, wall grazers, linear lights, accent lights, and decorative lighting. With flexible installation options such as recessed, surface-mounted, suspended, and track systems, the collection allows each fixture to be selected according to the site condition, ceiling detail, design requirement, and intended lighting effect. More than a product range, the Indoor Collection is a toolkit for designers.

DOWNLIGHT & SPOTLIGHT

A refined collection of fixed and adjustable spotlights and downlights, offered in a wide range of shapes and models, to harmonize seamlessly with diverse spaces and applications. Defined by elegant aesthetics and precise beam control, these lighting solutions enhance architectural details, support design vision, and elevate the overall character of the space.

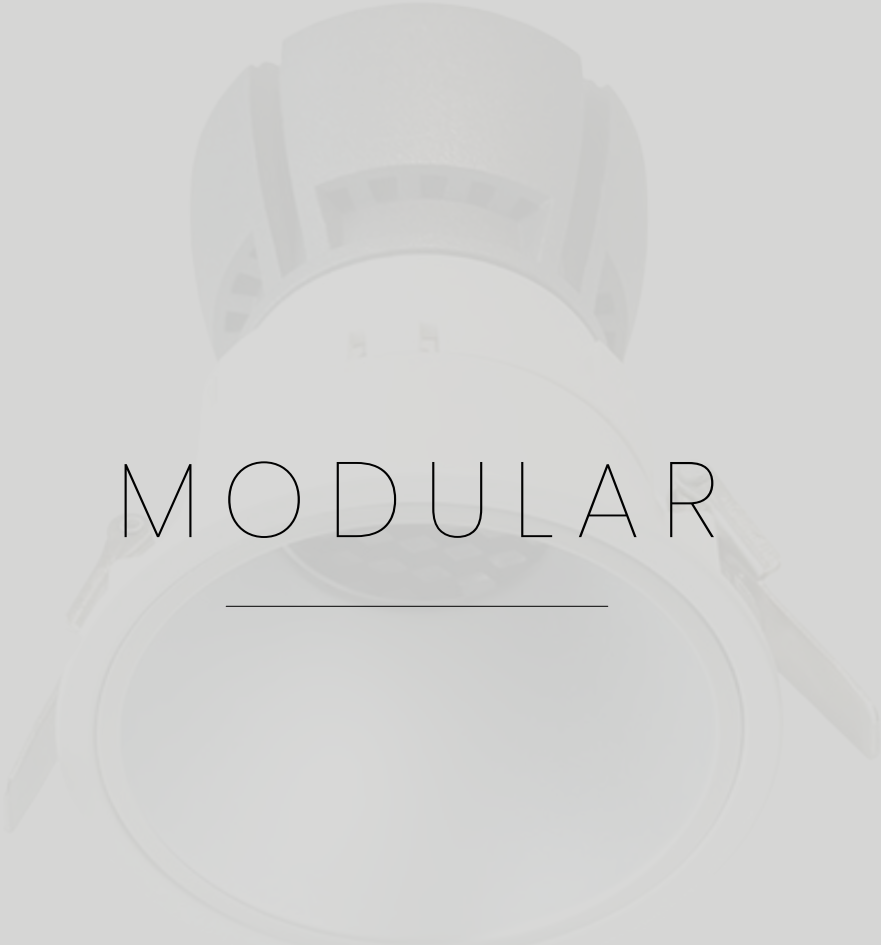

MODULAR


DRIVERS ARE PROVIDED BY **TRIDONIC**

Modular is a recessed LED fixture family designed to serve as ambient, task, or accent lighting. It offers multiple beam angles, frame types, and options, with anti-glare accessories and dimming options to support a more comfortable atmosphere.

Modular


Adjustable -Downlight & Spotlight - Recessed

ACU 01703-09



Wattage	Beam Angle
9W	10°
Colors Temperature	Lumen Output
3000k	750 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	Depending on the frame
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 01703-15



Wattage	Beam Angle
15W	10°
Colors Temperature	Lumen Output
3000k	1100 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	Depending on the frame
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Modular

Adjustable -Downlight & Spotlight - Recessed

ACU 01704-09



Wattage	Beam Angle
9W	15° 25° 40° 60°
Colors Temperature	Lumen Output
3000k	750 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	Depending on the frame
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 01704-15




Wattage	Beam Angle
15W	15° 25° 40° 60°
Colors Temperature	Lumen Output
3000k	1100 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	Depending on the frame
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





THE FRAMES

Stella Adjustable, Hydra Collection, Lynx, Cursa & Solna

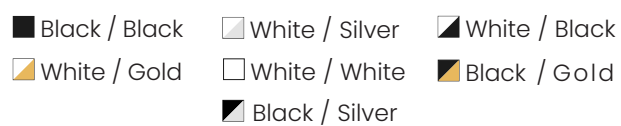


All these product frames come in multiple Colors options to match different styles & preferences!

Modular Frames

Colors & Features


ACU 10002 ADJ

Stella Adj



ACU 10005R


Hydra



ACU 10005RW


Hydra

Wall Washer



ACU 10005S



Hydra-Square



ACU 10005SW


Hydra-Square

Wall Washer



ACU 10006R

Lynx




Modular Frames

Colors & Features

ACU 10006RW

Lynx

Wall Washer





ø72mm

ACU 300029


Solna

Timeless



ACU 10007DS

Cursa



△ 154 x 152 mm




LEO-IP

Leo IP is a recessed spotlight family with powder-coated housing and strong heat-sink capability to reduce luminous degradation. Specifically recommended for wet applications such as washrooms.

Leo IP


Fixed – Downlight & Spotlight – Recessed

ACU S 17009



Wattage	Beam Angle
8W	24° 40° 60°
Colors Temperature	Lumen Output
3000k	675 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum

ACU S 17010



Wattage	Beam Angle
15W	15° 24° 38° 60°
Colors Temperature	Lumen Output
3000k	1125 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Leo IP

Adjustable – Downlight & Spotlight – Recessed

ACU S 17010 ADJ

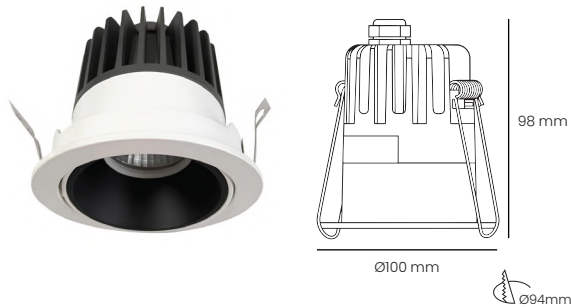

Wattage	Beam Angle
15W	15° 24° 38° 60°
Colors Temperature	Lumen Output
3000k	1125 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Leo IP Mini

Mini Fixed – Spotlight – Recessed

ACU S 17010MR



Wattage	Beam Angle
1.5W	10°
Colors Temperature	Lumen Output
3000k	90 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





NERO

C O L L E C T I O N

Nero is a low-glare collection designed to deliver precise, evenly distributed illumination with strong visual comfort. Its small-aperture concept helps improve ambient brightness while maintaining a refined architectural appearance.


NERO FLAT



Nero Flat

Fixed - Downlight & Spotlight - Recessed

ACU FS 251101




Wattage	Beam Angle
5W	15° 36°
Colors Temperature	Lumen Output
3000k	300 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Nero Flat


Fixed – Downlight & Spotlight – Recessed

ACU FS 251102



Wattage	Beam Angle
10W	15° 36°
Colors Temperature	Lumen Output
3000k	600 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU FS 251103



Wattage	Beam Angle
15W	15° 36°
Colors Temperature	Lumen Output
3000k	915 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






NERO CURVED



Nero Curved

Adjustable - Fixed - Downlight & Spotlight - Recessed

ACU CS 251000




Wattage	Beam Angle
5W	25° 40°
Colors Temperature	Lumen Output
3000k	172 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥95	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Nero Curved

Fixed - Downlight & Spotlight - Recessed

ACU CS 251001



Wattage	Beam Angle
5W	15° 36°
Colors Temperature	Lumen Output
3000k	300 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Nero Curved

Fixed – Downlight & Spotlight – Recessed

ACU CS 251002



Wattage	Beam Angle
10W	15° 36°
Colors Temperature	Lumen Output
3000k	600 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU CS 251003



Wattage	Beam Angle
15W	15° 36°
Colors Temperature	Lumen Output
3000k	900 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached Remote Driver)	Powder Coated Aluminum






NERO TRIMLESS

Nero Trimless

Fixed - Downlight & Spotlight - Recessed

ACU TS 251201



Wattage	Beam Angle
5W	15° 36°
Colors Temperature	Lumen Output
3000k	350 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Nero Trimless

Fixed – Downlight & Spotlight – Recessed

ACU TS 251202



Wattage	Beam Angle
10W	15° 36°
Colors Temperature	Lumen Output
3000k	700 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥95	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU TS 251203



Wattage	Beam Angle
15W	15° 36°
Colors Temperature	Lumen Output
3000k	1050 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum




NERO WALL WASHER


Nero

Adjustable - Wall Washer - Recessed

ACU WW 251301



Wattage	Beam Angle
5W	20° 38°
Colors Temperature	Lumen Output
3000k	120 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥95	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

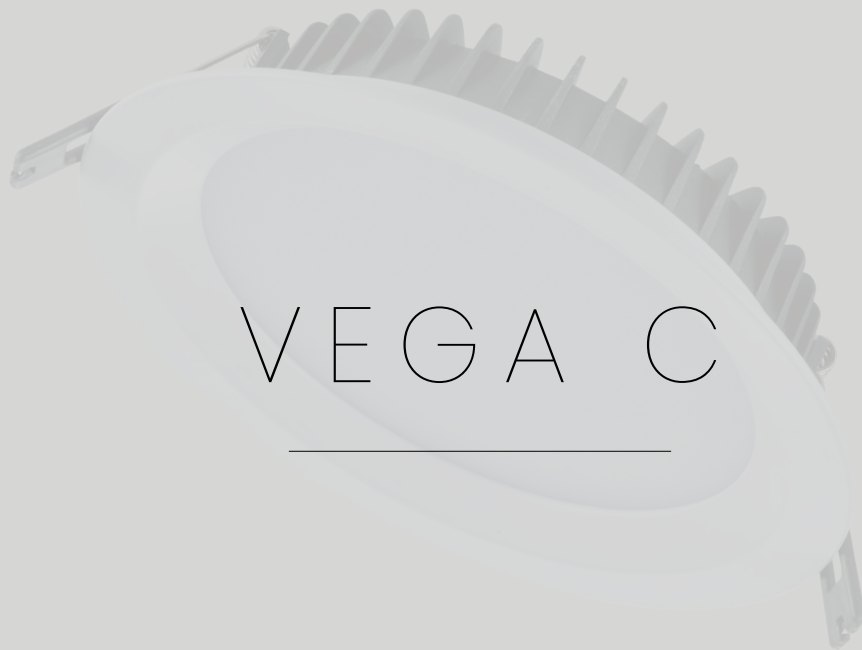


DRIVERS ARE PROVIDED BY **TRIDONIC**

Vega C is an ultra-thin recessed downlight designed to be practical, simple, and easy to install. The catalogue highlights its anti-glare system and frosted acrylic diffuser for visual comfort and strong light transmittance.

Vega C


Fixed - Downlight - Recessed

ACU D 20060



Wattage	Beam Angle
5W	100°
Colors Temperature	Lumen Output
3000k	380 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU D 20061




Wattage	Beam Angle
7W	100°
Colors Temperature	Lumen Output
3000k	550 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Vega C


Fixed - Downlight - Recessed

ACU D 20062



Wattage	Beam Angle
9W	100°
Colors Temperature	Lumen Output
3000k	720 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU D 20063



Wattage	Beam Angle
12W	100°
Colors Temperature	Lumen Output
3000k	960 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Vega C


Fixed - Downlight - Recessed

ACU D 20064



Wattage	Beam Angle
15W	100°
Colors Temperature	Lumen Output
3000k	1200 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU D 20065




Wattage	Beam Angle
20W	100°
Colors Temperature	Lumen Output
3000k	1600 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Vega C


Fixed - Downlight - Recessed

ACU D 20066



Wattage	Beam Angle
25W	100°
Colors Temperature	Lumen Output
3000k	2000 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU D 20067



Wattage	Beam Angle
30W	100°
Colors Temperature	Lumen Output
3000k	2400 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






DRIVERS ARE PROVIDED BY **TRIDONIC**

Mega is a recessed downlight family in the stronger-output tier of the simple anti-glare downlight category, designed for powerful and clean general illumination.

Mega


Fixed - Downlight - Recessed

ACU DR 240001



Wattage	Beam Angle
15W	85°
Colors Temperature	Lumen Output
3000K	1423 LM
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached External Driver)	Powder Coated Aluminum

ACU DR 240002



Wattage	Beam Angle
33W	85°
Colors Temperature	Lumen Output
3000K	3532 LM
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached External Driver)	Powder Coated Aluminum






Mega


Fixed – Downlight – Surface Mounted

ACU DSM 240003



Wattage	Beam Angle
8W	80°
Colors Temperature	Lumen Output
3000K	635 LM
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	☒ BW ☒ WG ☐ WS
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU DSM 240004




Wattage	Beam Angle
15W	80°
Colors Temperature	Lumen Output
3000K	1139 LM
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	☒ BW ☒ WG ☐ WS
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Mega


Fixed – Downlight – Surface Mounted

ACU DSM 240005



Wattage	Beam Angle
30W	110°
Colors Temperature	Lumen Output
3000K	2746 LM
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	☒ BW ☒ WG ☐ WS
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU DSM 240006



Wattage	Beam Angle
120W	110°
Colors Temperature	Lumen Output
3000K	11781 LM
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	☒ BW ☒ WG ☐ WS
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum







PAVO



DRIVERS ARE PROVIDED BY **TRIDONIC**

Pavo is positioned as a family specialized for residential and hospitality applications, with high efficiency, multiple beam angles, and several wattage options. The catalogue highlights adjustability as the family's main character, supporting the illumination of different surfaces from one source.

Pavo


Adjustable - Accent Light - Recessed

ACU 200901



Wattage	Beam Angle
3x2 W	12° 34° 48°
Colors Temperature	Lumen Output
3000k	450 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 200902




Wattage	Beam Angle
6x2 W	12° 34° 48°
Colors Temperature	Lumen Output
3000k	900 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Pavo


Fixed -Wall Washer – Recessed

ACU 200903



Wattage	Beam Angle
5x2 W	100°
Colors Temperature	Lumen Output
3000k	750 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 200904



Wattage	Beam Angle
10x2 W	100°
Colors Temperature	Lumen Output
3000k	1500 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Pavo

Fixed - Wall Washer - Recessed

ACU 200905




Wattage	Beam Angle
15x2 W	100°
Colors Temperature	Lumen Output
3000k	2250 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Pavo

Fixed - Downlight & Spotlight - Recessed

ACU S18104




Wattage	Beam Angle
2 W	12° 30°
Colors Temperature	Lumen Output
3000k	185 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Pavo


Fixed - Downlight & Spotlight - Recessed

ACU S 18105



Wattage	Beam Angle
2x2 W	12° 30°
Colors Temperature	Lumen Output
3000k	370 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU S 18106



Wattage	Beam Angle
5x2 W	12° 30°
Colors Temperature	Lumen Output
3000k	855 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Pavo


Fixed - Downlight & Spotlight - Recessed

ACU S 18107

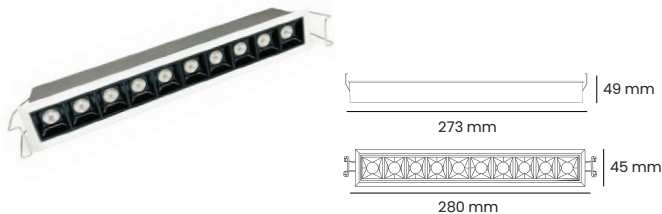

Wattage	Beam Angle
10x2 W	12° 30°
Colors Temperature	Lumen Output
3000k	1600 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU S 18108

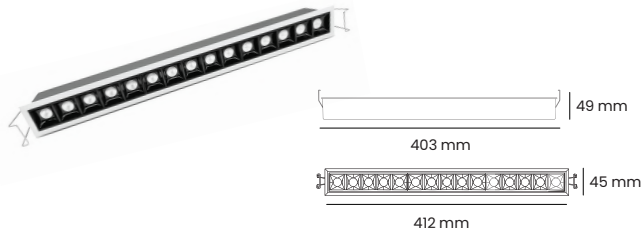

Wattage	Beam Angle
15x2 W	12° 30°
Colors Temperature	Lumen Output
3000k	2400 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





MENSA PLUS


C O L L E C T I O N

Mensa Plus is a spotlight family organized across recessed, surface-mounted, and track-mounted executions. The locked structure shows it as a system of focused lighting options built around spotlight performance and mounting flexibility.

Mensa Plus

Rotatable & Adjustable - Downlight & Spotlight - Recessed

ACU RL 245010

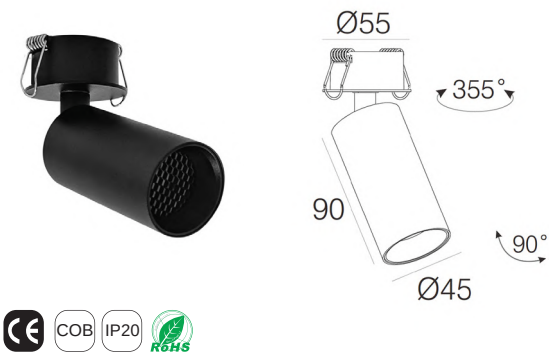

Wattage	Beam Angle
7W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	531 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU RL 245011




Wattage	Beam Angle
15W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1272 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Mensa Plus

Rotatable & Adjustable – Downlight & Spotlight – Recessed

ACU RL 245012



Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2117 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Mensa Plus


Rotatable & Adjustable – Downlight & Spotlight – Surface Mounted

ACU SML 245510

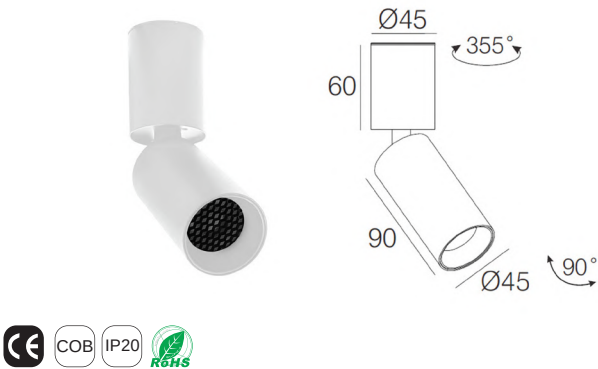

Wattage	Beam Angle
7W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	531 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU SML 245511

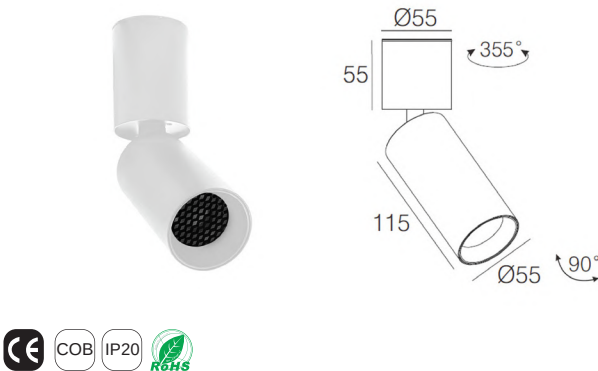


Wattage	Beam Angle
15W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1272 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Mensa Plus

Rotatable & Adjustable – Downlight & Spotlight – Surface Mounted

ACU SML 245512




Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2117 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Mensa Plus


Rotatable & Adjustable – Spotlight & Downlight – Track Mounted

ACU TL 244010



Wattage	Beam Angle
7W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	531 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU TL 244011




Wattage	Beam Angle
15W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1272 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Mensa Plus

Rotatable & Adjustable – Spotlight & Downlight – Track Mounted

ACU TL 244012

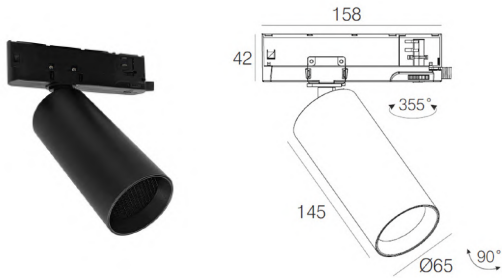

Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2117 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum





Bianca is a spotlight family designed for refined accent lighting that highlights art, textures, and architectural details. It combines a decorative sensibility with focused technical performance.

Bianca

Rotatable & Adjustable – Spotlight & Downlight – Surface Mounted

ACU 200101




Wattage	Beam Angle
13W	12° 25° 38°
Colors Temperature	Lumen Output
3000k	1079 Lm
Installation	Rated Life Hours
Surface mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Bianca

Rotatable & Adjustable – Spotlight & Downlight – Recessed

ACU 200102

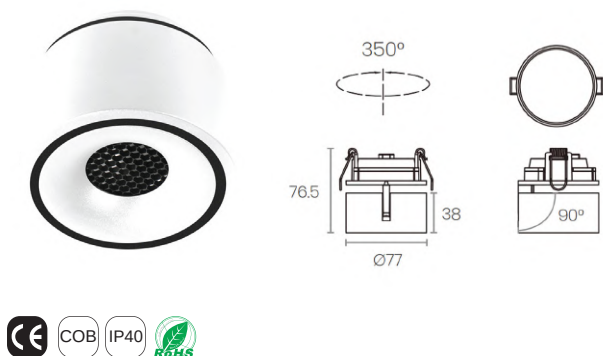

Wattage	Beam Angle
13W	12° 25° 38°
Colors Temperature	Lumen Output
3000k	1079 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





PULSAR


Mini Spotlight

Pulsar is a mini spotlight family intended for discreet but powerful accent lighting. The catalogue positions it as suitable for enhancing textures, artworks, and architectural features with subtle sophistication.

Pulsar


Rotatable & Adjustable – Spotlight – Recessed

ACU MS 264010



Wattage	Beam Angle
1x3 W	15° 24°
Colors Temperature	Lumen Output
3000k	143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU MS 264011

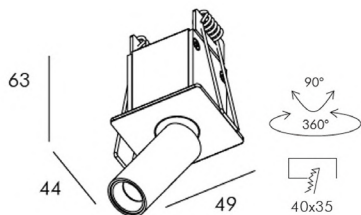

Wattage	Beam Angle
1x3 W	15° 24°
Colors Temperature	Lumen Output
3000k	143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum







Pulsar

Rotatable & Adjustable – Spotlight – Recessed

ACU MS 264012

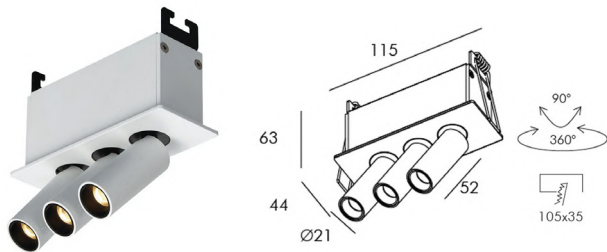

Wattage	Beam Angle
3x2 W	15° 24°
Colors Temperature	Lumen Output
3000k	413 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





PEEK



COLLECTION

Peek is a compact recessed adjustable spotlight series. The catalogue pages show a mix of source types across the merged codes, all aimed at directional accent lighting in a small format.

Peek


Adjustable - Spotlight - Recessed

ACU 230001



Wattage	Beam Angle
3W	15° 24°
Colors Temperature	Lumen Output
3000k	148 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 230002



Wattage	Beam Angle
3W	15°-24°
Colors Temperature	Lumen Output
3000k	65 -78 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





Peek

Adjustable - Spotlight - Recessed

ACU 230003




Wattage	Beam Angle
3W	15° 24°
Colors Temperature	Lumen Output
3000k	108 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Peek

Adjustable - Spot light - Recessed - Zoomable

ACU 230004

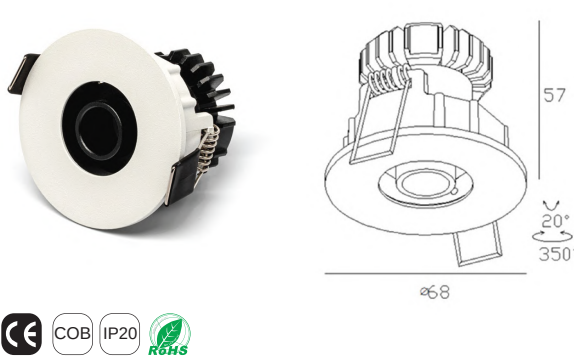


Wattage	Beam Angle
3W	8°
Colors Temperature	Lumen Output
3000k	128 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Peek

Adjustable – Spotlight – Recessed

ACU 230005

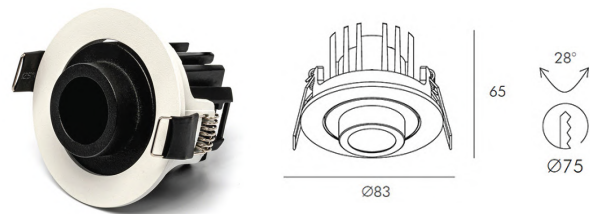

Wattage	Beam Angle
5W	5°
Colors Temperature	Lumen Output
3000k	143 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






RAY

COLLECTION


Ray is an adjustable recessed spotlight series offered in multiple frame expressions, including round and square visual options, while keeping a focused accent-lighting role.

ACU 232001



Wattage	Beam Angle
7W	15° 35°
Colors Temperature	Lumen Output
3000k	378 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 232002




Wattage	Beam Angle
12W	15° 35°
Colors Temperature	Lumen Output
3000k	700 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 232003




Wattage	Beam Angle
12W	15° 35°
Colors Temperature	Lumen Output
3000k	770 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 232004

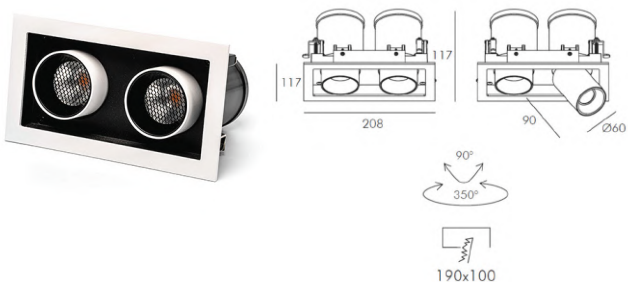

Wattage	Beam Angle
2x12W	15° 35°
Colors Temperature	Lumen Output
3000k	1455 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 232005

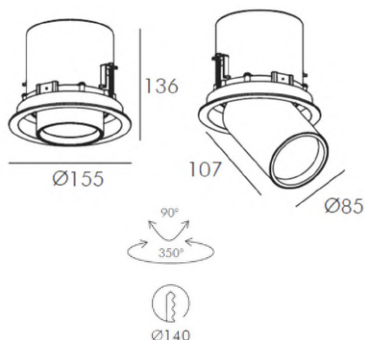

Wattage	Beam Angle
25W	15° 45°
Colors Temperature	Lumen Output
3000k	1780 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum







SPARK

COLLECTION


Spark is an adjustable spotlight series offered in multiple frame expressions, including trimless, round, square, rectangular, and stadium-like forms. It is a broader family built around focused recessed accent lighting.



Spark

Adjustable – Downlight & Spotlight – Recessed

ACU 231001

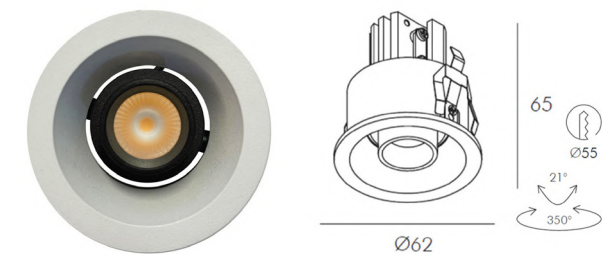


Wattage	Beam Angle
1x7W	20° 30°
Colors Temperature	Lumen Output
3000k	358 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Spark

Adjustable – Downlight & Spotlight – Recessed – Trimless

ACU 231002

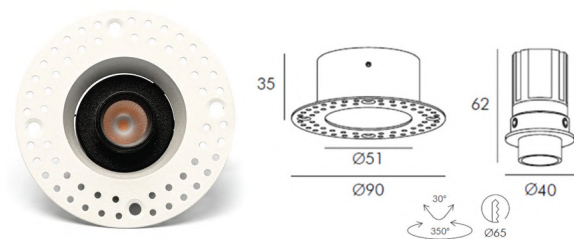


Wattage	Beam Angle
1x7W	20° 30°
Colors Temperature	Lumen Output
3000k	358 Lm
Installation	Rated Life Hours
Trimless Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Spark

Adjustable – Downlight & Spotlight – Recessed – Trimless

ACU 231003




Wattage	Beam Angle
2x7W	20° 30°
Colors Temperature	Lumen Output
3000k	744 Lm
Installation	Rated Life Hours
Trim-Less Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

Spark

Adjustable – Downlight & Spotlight – Recessed

ACU 231004




Wattage	Beam Angle
1x7W	20° 30°
Colors Temperature	Lumen Output
3000k	363 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Spark


Adjustable – Downlight & Spotlight – Recessed

ACU 231005

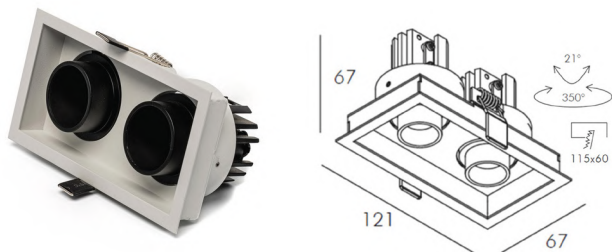

Wattage	Beam Angle
2x7W	20° 30°
Colors Temperature	Lumen Output
3000k	803 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 231006

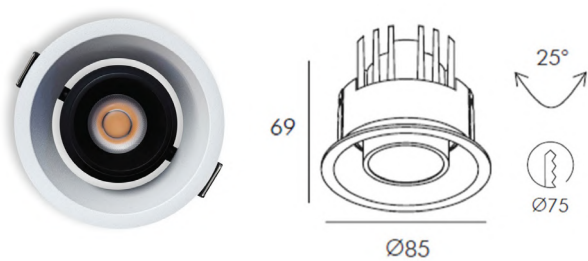


Wattage	Beam Angle
1x10W	20° 35°
Colors Temperature	Lumen Output
3000k	612 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Spark


Adjustable – Downlight & Spotlight – Recessed

ACU 231007

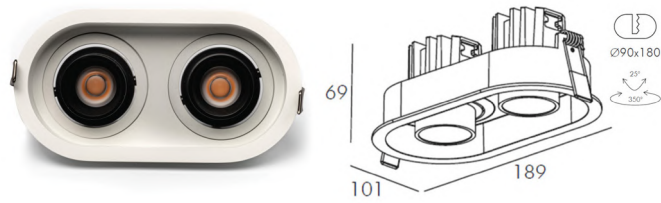

Wattage	Beam Angle
2x10W	20° 35°
Colors Temperature	Lumen Output
3000k	1143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 231008

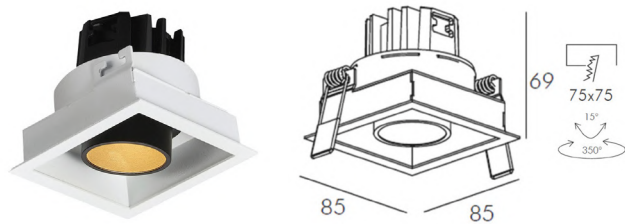


Wattage	Beam Angle
1x10W	20° 35°
Colors Temperature	Lumen Output
3000k	612 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Spark


Adjustable – Downlight & Spotlight – Recessed

ACU 231009



Wattage	Beam Angle
2x10W	20° 35°
Colors Temperature	Lumen Output
3000k	1143 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 231010



Wattage	Beam Angle
3x10W	20° 35°
Colors Temperature	Lumen Output
3000k	1747 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Velora is a clean surface-mounted downlight for residential and commercial spaces, designed to provide comfortable illumination through a simple architectural form. Its minimal profile integrates naturally into interiors while maintaining a refined ceiling presence.

Velora Cubic


Fixed – Downlight & Spotlight – Surface Mounted

ACU DSM 261010



Wattage	Beam Angle
7 W	15° 24° 35°
Colors Temperature	Lumen Output
3000k	440 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU DSM 261011



Wattage	Beam Angle
12 W	15° 24° 35°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum






Velora Cubic

Fixed – Downlight & Spotlight – Surface Mounted

ACU DSM 261012



Wattage	Beam Angle
18 W	15° 24° 35°
Colors Temperature	Lumen Output
3000k	1280 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum





VELORA C


COLLECTION

Velora C is a surface-mounted downlight with an elegant cylindrical silhouette, designed to deliver soft, balanced illumination through a defined exterior. Its rounded body gives the fixture a cleaner look while staying minimal, making it suitable for residential and commercial interiors.

Velora Cylindric


Fixed – Downlight & Spotlight – Surface Mounted

ACU DSM 261015



Wattage	Beam Angle
8 W	15° 24° 36°
Colors Temperature	Lumen Output
3000k	720 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU DSM 261016



Wattage	Beam Angle
12 W	15° 24° 36°
Colors Temperature	Lumen Output
3000k	1080 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum









Step is a recessed fixture positioned more around decorative lighting effect than raw output quantity, making it useful where subtle effect and guidance matter.

Step

Fixed – Floor Wash –Recessed

ACU 237003



Wattage	Beam Angle
3 W	110°
Colors Temperature	Lumen Output
3000k	Decorative Lumen Effect
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum + Iron + PC

3 Mode Switch:

1. Always on
2. Infrared Motion Sensing
3. Infrared + Light Sensing



AURIGA


I P 2 0 L E D S t r i p L i g h t

Auriga is a modern LED strip-light solution designed to deliver soft, continuous indirect illumination for comfortable and inviting interiors. The catalogue recommends it for ceilings, coves, and shelving.

Auriga

IP20 RGBW Fixed – Strip Light – Surface Mounted – SMD

ACU ST 17041

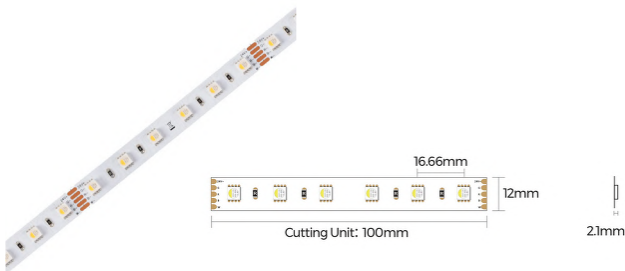


Wattage	Beam Angle
19 W/m	120°
Colors Temperature	Lumen Output
RGBW3000	700 lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

Auriga

IP20 – Strip Light – Surface Mounted – SMD

ACU ST 17047

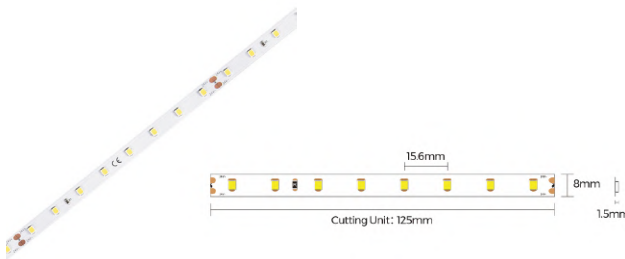

Wattage	Beam Angle
4.8 W/m	120°
Colors Temperature	Lumen Output
3000k	540 lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips






Auriga


IP20 – Strip Light – Surface Mounted – SMD

ACU ST 17048

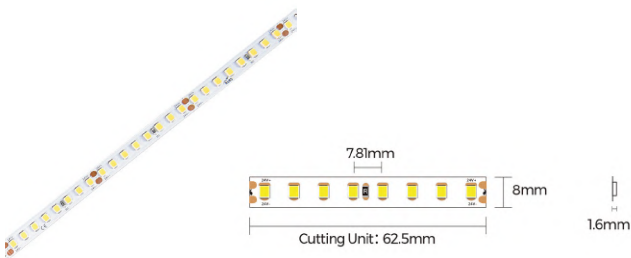

Wattage	Beam Angle
9.6 W/m	120°
Colors Temperature	Lumen Output
3000k	1090 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

ACU ST 17049C

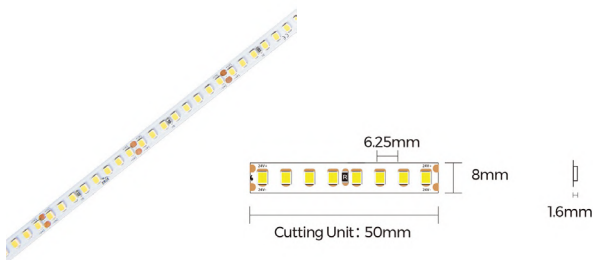

Wattage	Beam Angle
14.4 W/m	120°
Colors Temperature	Lumen Output
3000k	1585 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips






Auriga


Fixed - Strip Light - Surface Mounted - Tunable White - SMD

ACU ST 202111

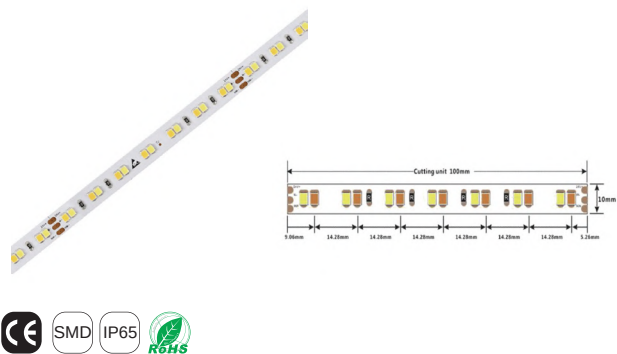

Wattage	Beam Angle
9.6 W/m	120°
Colors Temperature	Lumen Output
Tunable 2700-6000K	750 lm/m
CRI	Rated Life Hours
≥90	30,000 - 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

ACU ST 202101

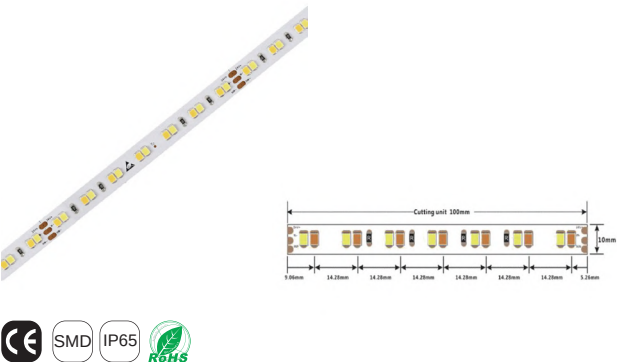

Wattage	Beam Angle
19 W/m	120°
Colors Temperature	Lumen Output
Tunable 2700-6000K	1505 lm/m
CRI	Rated Life Hours
≥90	30,000 - 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips



Auriga

IP20 – Strip Light – Surface Mounted – COB

ACU ST 202003



Wattage	Beam Angle
10 W/m	120°
Colors Temperature	Lumen Output
3000k	900 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

ACU ST 202004



Wattage	Beam Angle
5 W/m	120°
Colors Temperature	Lumen Output
3000k	450 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips





INDOOR LINEAR

C O L L E C T I O N

Indoor Linear is a modern linear-light family designed to provide uniform illumination, high visual comfort, and an elegant form. It appears in multiple optical/diffuser expressions and installation directions.



Surface Mounted & Suspended

INDOOR LINEAR


HONEYCOMB

DIFFUSER

Indoor Linear


Honeycomb Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240101SM



Wattage	Beam Angle
34W	60°x75°
Colors Temperature	Lumen Output
3000k	2085 Lm
4000k	2195 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU IL 240102SM



Wattage	Beam Angle
46W	60°x75°
Colors Temperature	Lumen Output
3000k	2820 Lm
4000k	2965 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum






Indoor Linear


Honeycomb Diffuser - Fixed - Linear Light - Surface Mounted & Suspended

ACU IL 240103SM

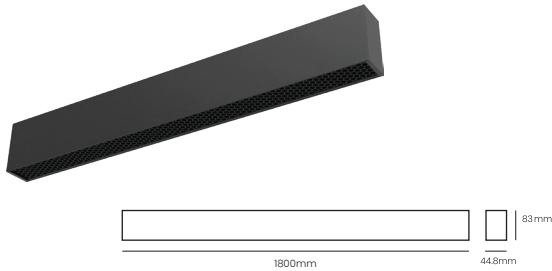

Wattage	Beam Angle
51W	60°x75°
Colors Temperature	Lumen Output
3000k	3125 Lm
4000k	3290 Lm
Installation	Rated Life Hours
Surface Mounted - Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU IL 240104SM

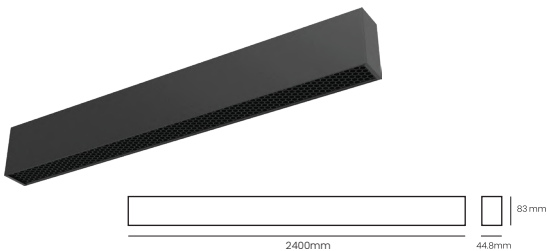

Wattage	Beam Angle
68W	60°x75°
Colors Temperature	Lumen Output
3000k	4165 Lm
4000k	4385 Lm
Installation	Rated Life Hours
Surface Mounted - Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



LOUVER


DIFFUSER



Indoor Linear


Louver Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240201SM

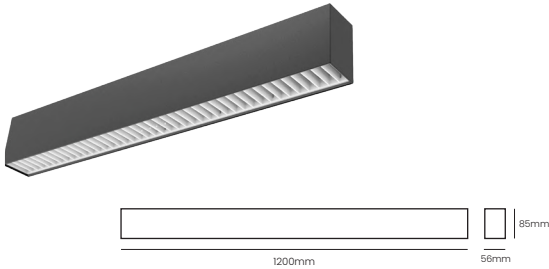

Wattage	Beam Angle
34W	72°
Colors Temperature	Lumen Output
3000k	1760 Lm
4000k	1890 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU IL 240202SM

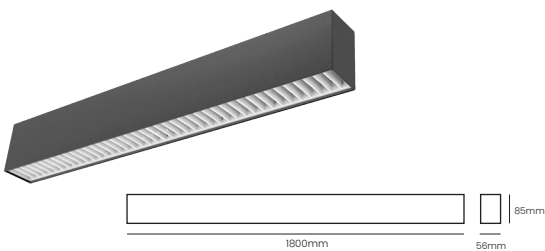



Wattage	Beam Angle
51W	72°
Colors Temperature	Lumen Output
3000k	2690 Lm
4000k	2830 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Indoor Linear

Louver Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240203SM

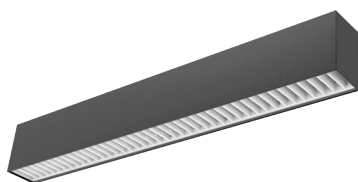

Wattage	Beam Angle
68W	72°
Colors Temperature	Lumen Output
3000k	3550 Lm
4000k	3770 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



PRISMATIC

DIFFUSER



Indoor Linear


Prismatic Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240301SM



Wattage	Beam Angle
28W	65°x70°
Colors Temperature	Lumen Output
3000k	2745 Lm
4000k	2890 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU IL 240302SM

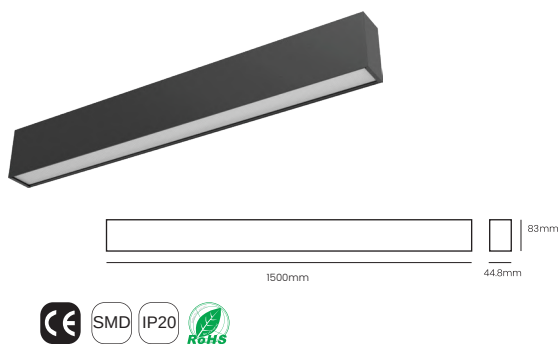


Wattage	Beam Angle
34W	65°x70°
Colors Temperature	Lumen Output
3000k	3335 Lm
4000k	3510 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Indoor Linear

Prismatic Diffuser – Fixed – Linear Light – Surface Mounted & Suspended

ACU IL 240303SM

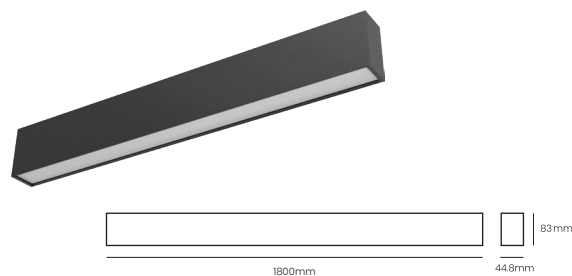

Wattage	Beam Angle
40W	65°x70°
Colors Temperature	Lumen Output
3000k	3920 Lm
4000k	4130 Lm
Installation	Rated Life Hours
Surface Mounted – Suspended	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum





RECESSED


INDOOR LINEAR



Indoor Linear


Fixed – Linear Light – Recessed

ACU IL 240401R



Wattage	Beam Angle
19W	110°
Colors Temperature	Lumen Output
3000k	1900 Lm
4000k	2020 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU IL 240402R




Wattage	Beam Angle
27W	110°
Colors Temperature	Lumen Output
3000k	2700 Lm
4000k	2870 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Indoor Linear


Fixed – Linear Light – Recessed

ACU IL 240403R



Wattage	Beam Angle
38W	110°
Colors Temperature	Lumen Output
3000k	3800 Lm
4000k	4040 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU IL 240404R




Wattage	Beam Angle
27W	110°
Colors Temperature	Lumen Output
3000k	2800 Lm
4000k	2980 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Indoor Linear


Fixed – Linear Light – Recessed

ACU IL 240405R

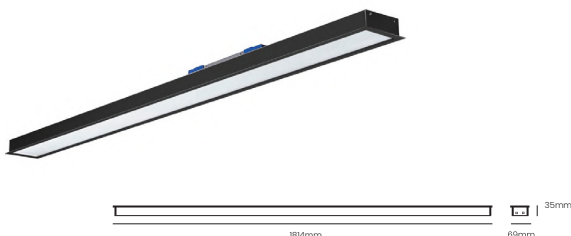

Wattage	Beam Angle
38W	110°
Colors Temperature	Lumen Output
3000k	3950 Lm
4000k	4200 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU IL 240406R

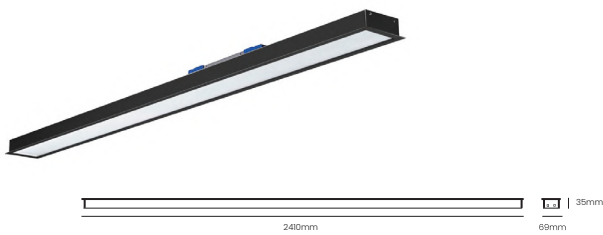

Wattage	Beam Angle
53W	110°
Colors Temperature	Lumen Output
3000k	5510 Lm
4000k	5860 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Indoor Linear

Fixed – Linear Light – Recessed

ACU IL 240407R



Wattage	Beam Angle
38W	110°
Colors Temperature	Lumen Output
3000k	3950 Lm
4000k	4200 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU IL 240408R




Wattage	Beam Angle
60W	110°
Colors Temperature	Lumen Output
3000k	6230 Lm
4000k	6630 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Indoor Linear

Fixed – Linear Light – Recessed

ACU IL 240409R



Wattage	Beam Angle
75W	110°
Colors Temperature	Lumen Output
3000k	7790 Lm
4000k	8290 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum





METEOR MAGNETIC


2 4 V D C

Meteor Magnetic is a magnetic lighting system that allows fixtures to snap and slide along magnetic tracks, creating flexible and dynamic lighting compositions. It combines architectural precision with a modular system approach.

Meteor Magnetic


Fixed – Grazer Light – Track Mounted

ACU MM 243010

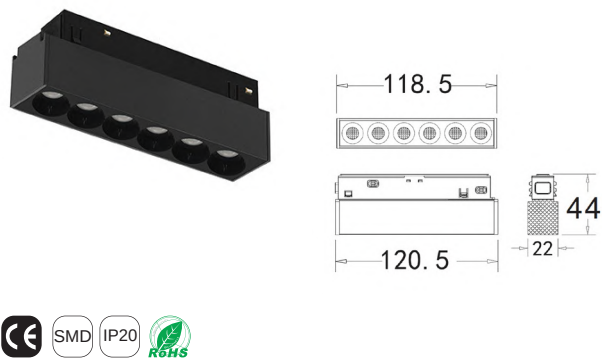

Wattage	Beam Angle
6W	24° 38°
Colors Temperature	Lumen Output
3000k	510 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243011

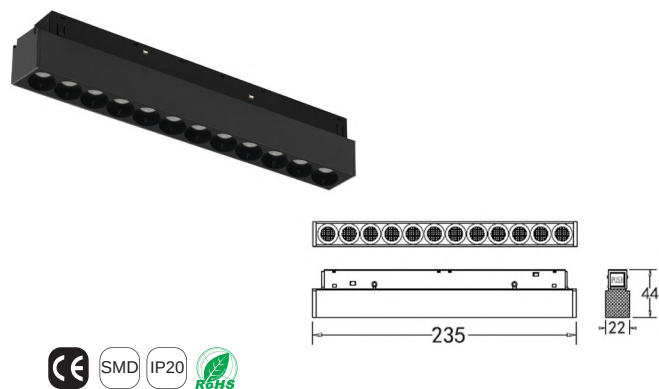

Wattage	Beam Angle
10W	24° 38°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC





Meteor Magnetic


Fixed – Grazer Light – Track Mounted

ACU MM 243012



Wattage	Beam Angle
16W	24° 38°
Colors Temperature	Lumen Output
3000k	1360 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243013

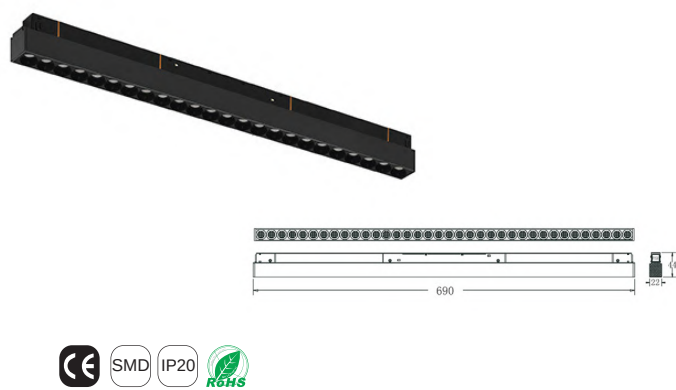


Wattage	Beam Angle
24W	24° 38°
Colors Temperature	Lumen Output
3000k	2040 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC



Meteor Magnetic


Fixed – Linear Light – Track Mounted

ACU MM 243020

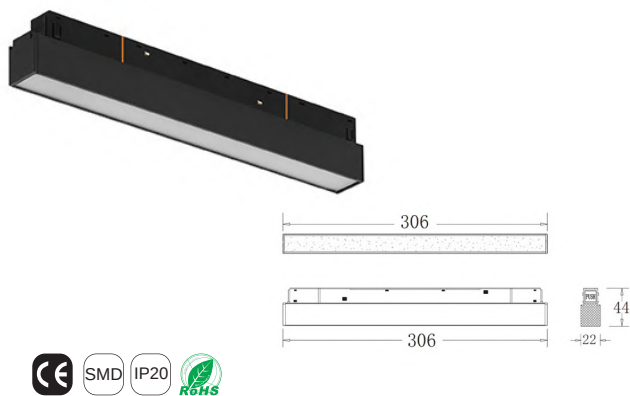

Wattage	Beam Angle
10W	110°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243021

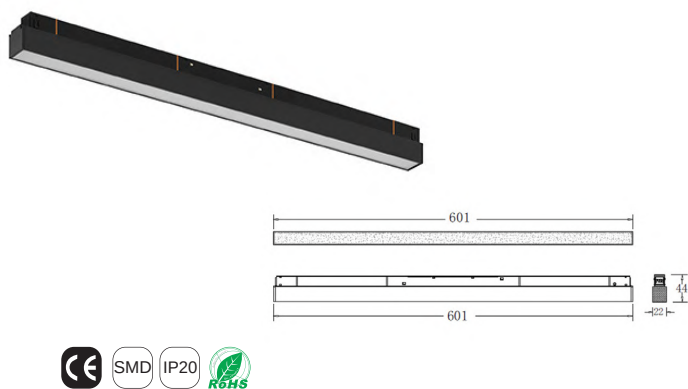

Wattage	Beam Angle
16W	110°
Colors Temperature	Lumen Output
3000k	1360 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC AC (Via the External Driver)	Powder Coated Aluminum + PC






Meteor Magnetic

Fixed – Linear Light – Recessed

ACU MM 243022

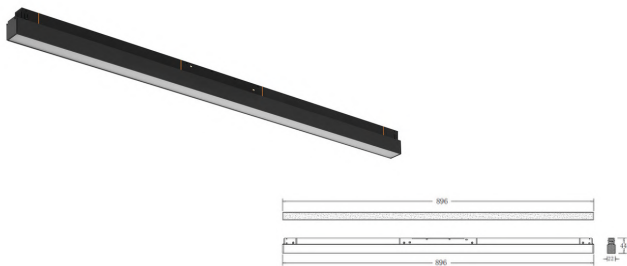


Wattage	Beam Angle
24W	110°
Colors Temperature	Lumen Output
3000k	2040 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Meteor Magnetic

Rotatable & Adjustable – Spotlight – Track Mounted

ACU MM 243030

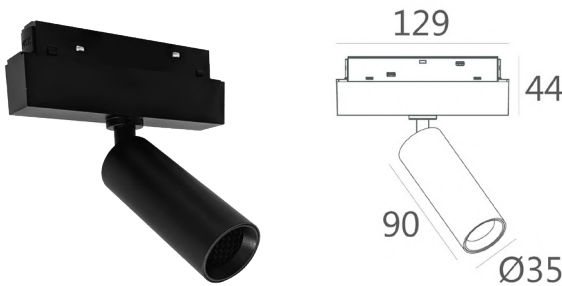

Wattage	Beam Angle
8W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	610 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC



Meteor Magnetic


Rotatable & Adjustable – Double Spot Light – Track Mounted

ACU MM 243031



Wattage	Beam Angle
2x8W	24° 40°
Colors Temperature	Lumen Output
3000k	1220 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243032

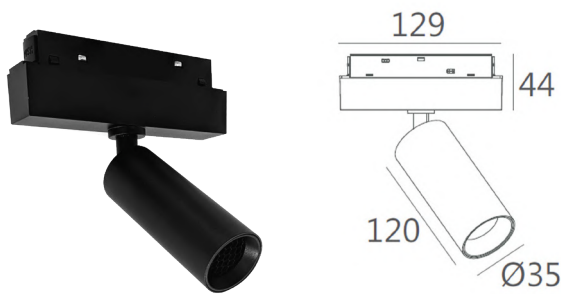


Wattage	Beam Angle
12W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	943 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC






Zoomable, Rotatable & Adjustable – Spotlight – Track Mounted



Wattage	Beam Angle
10W	10° to 60°
Colors Temperature	Lumen Output
3000k	739 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC



Wattage	Beam Angle
16W	10° to 60°
Colors Temperature	Lumen Output
3000k	1360 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

Meteor Magnetic

Wide – Rotatable & Adjustable – Downlight & Spotlight – Track Mounted

ACU MM 243036




Wattage	Beam Angle
10W	10° 24° 36°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

Meteor Magnetic

Zoomable, Rotatable & Adjustable – Motorized – Spotlight & Downlight – Track Mounted

ACU MM 243038

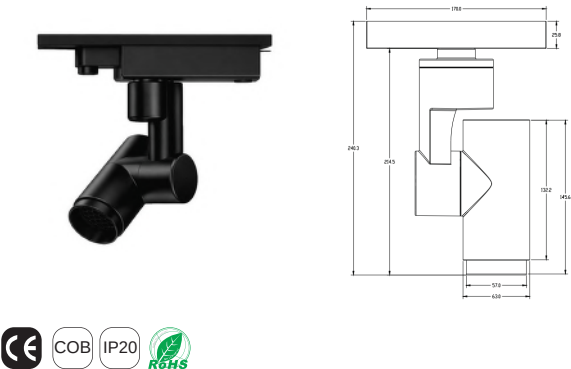

Wattage	Beam Angle
20W	15-50 Zoomable °
Colors Temperature	Lumen Output
2700 – >6500 Tunable	1700 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
48V DC (Via the External Driver)	Powder Coated Aluminum

Meteor Magnetic


Adjustable – Grazer Light – Track Mounted

ACU MM 243040



Wattage	Beam Angle
6W	24° 38°
Colors Temperature	Lumen Output
3000k	510 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243041

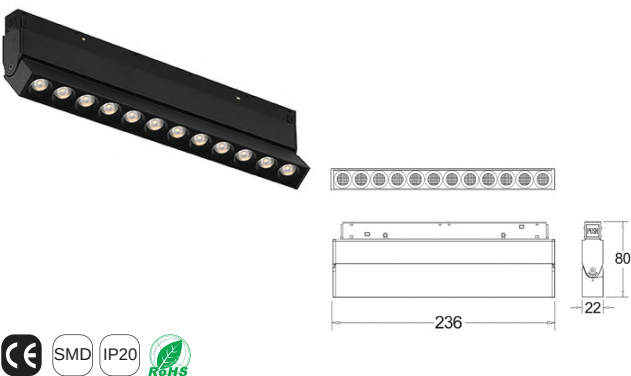

Wattage	Beam Angle
10W	24° 38°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC






Meteor Magnetic

Adjustable – Grazer Light – Track Mounted

ACU MM 243042

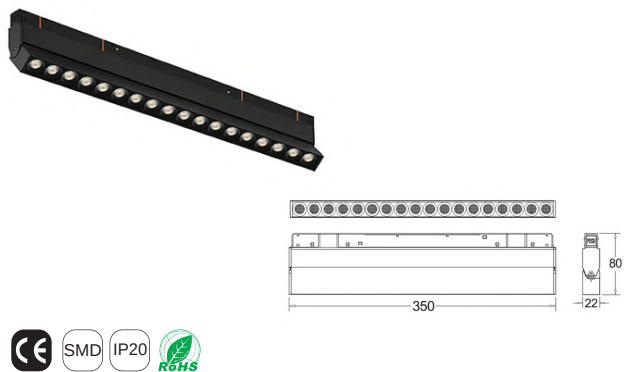

Wattage	Beam Angle
16W	24° 38°
Colors Temperature	Lumen Output
3000k	1360 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243043




Wattage	Beam Angle
24W	24° 38°
Colors Temperature	Lumen Output
3000k	2040 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC



Meteor Magnetic


Adjustable – Linear Light – Track Mounted

ACU MM 243050

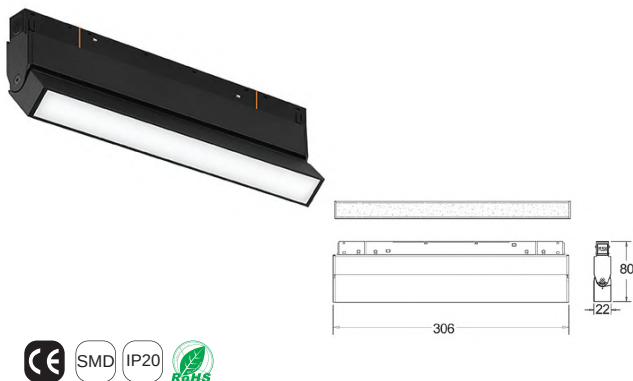

Wattage	Beam Angle
10W	110°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243051

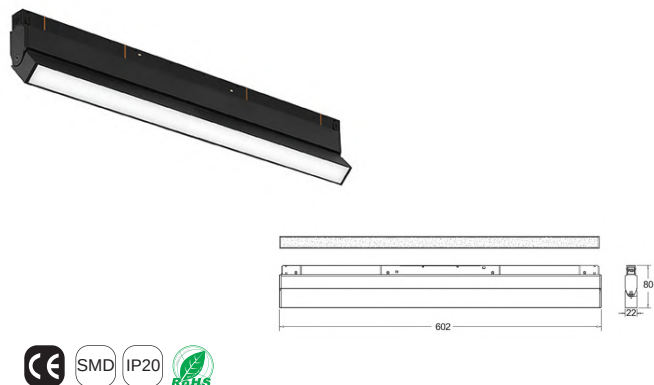

Wattage	Beam Angle
16W	110°
Colors Temperature	Lumen Output
3000k	1360 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC



Meteor Magnetic


Decorative Light – Track Mounted – Suspended

ACU MM 243060



Wattage	Beam Angle
10W	24° 40° 60°
Colors Temperature	Lumen Output
3000k	89l Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243061

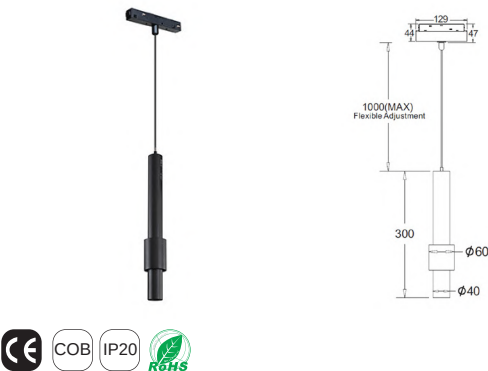

Wattage	Beam Angle
12W	24° 38°
Colors Temperature	Lumen Output
3000k	576 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC





Meteor Magnetic

Decorative Light – Track Mounted – Suspended

ACU MM 243062



Wattage	Beam Angle
6W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	315 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

ACU MM 243063



Wattage	Beam Angle
6W	235°
Colors Temperature	Lumen Output
3000k	375 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC



Meteor Magnetic

Decorative Light – Track Mounted

ACU MM 243064




Wattage	Beam Angle
16W	110°
Colors Temperature	Lumen Output
3000k	1063 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC

Meteor Magnetic

Adjustable – Wall Washer – Track Mounted

ACU MM 243065

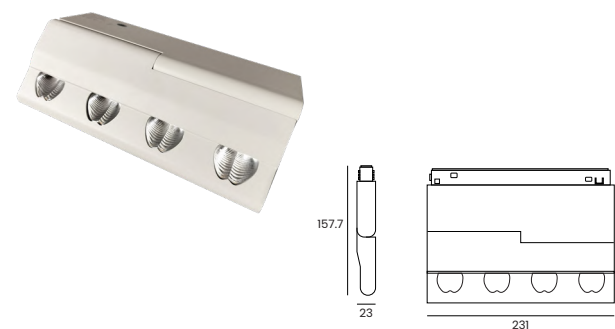

Wattage	Beam Angle
15W	33°
Colors Temperature	Lumen Output
3000k	1000 Lm
Installation	Rated Life Hours
Magnetic Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum








METEOR TRACK & ACCESSORIES

Before Gypsum Ceiling

ACU MMT 001BGR

Track Light

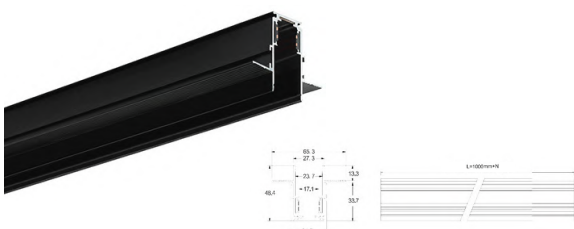

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminum + Copper



ACU MMT 002BGR

Track Light

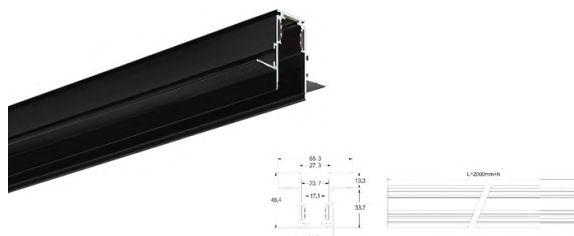

Installation

Recessed

Colors

■ Black □ White

Materials

Aluminum + Copper



ACU ACMM 1L-2.5AC

Track Rail with AC Grill



Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0229BGR

Right Angle Connector L-shape

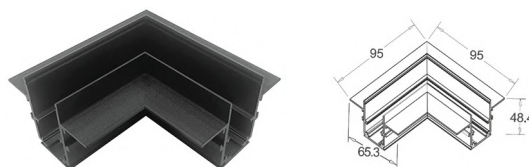

Installation

Recessed

Colors

■ Black □ White

Materials


Aluminium + Copper



Before Gypsum Ceiling

ACU MMAC 0230BGR

Outer Angle Connector



Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0231BGR

Inner Angle Connector



Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0236BGR

T Connector



Installation

Recessed

Colors

■ Black □ White



Materials

Aluminium + Copper



ACU MMAC 0237BGR

X Connector



Installation

Recessed

Colors


■ Black □ White

Materials

Aluminium + Copper



ACU MMT 001AGR

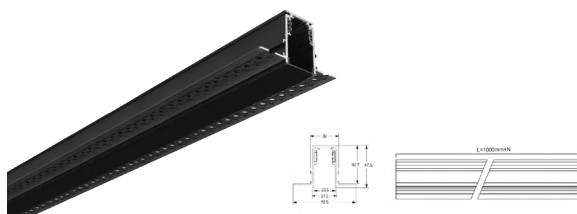

Installation

Recessed

Colors


■ Black □ White

Materials

Aluminium + Copper



ACU MMT 002AGR

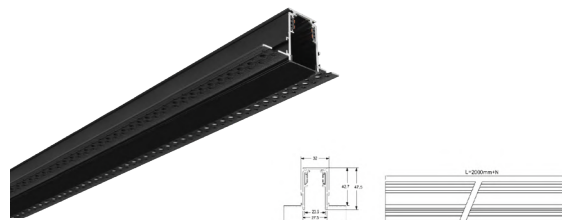

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0229AGR

Right Angle Connecto L-shaper

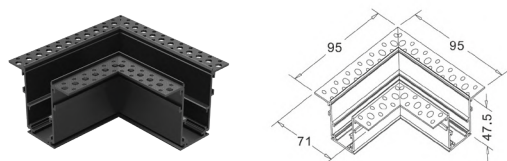

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0230AGR

Outer Angle Connector

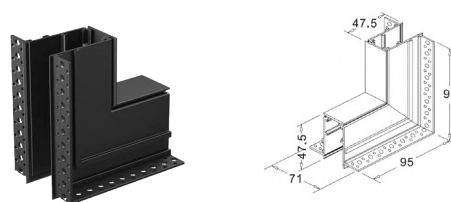

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0231AGR

Inner Angle Connector

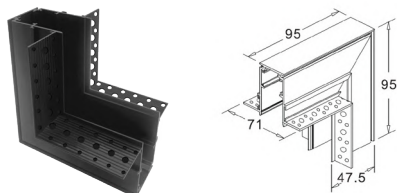

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0236AGR

T Connector

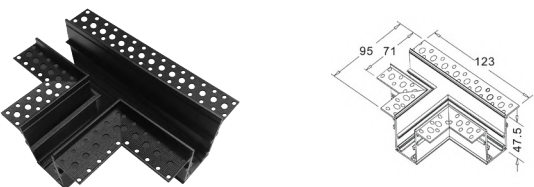

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



ACU MMAC 0237AGR

X Connector

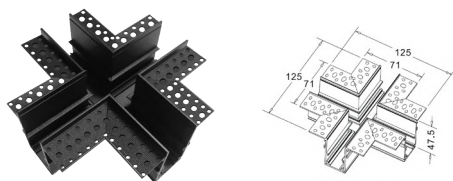

Installation

Recessed

Colors

■ Black □ White


Materials

Aluminium + Copper



Surface Mounted

ACU MMT 001SM

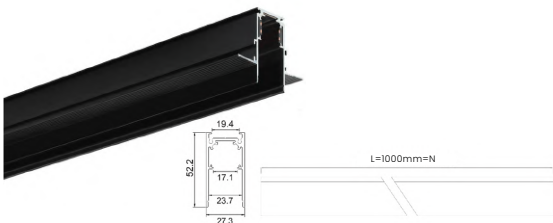

Installation

Surface Mounted

Colors


■ Black □ White

Materials

Aluminum + Copper



ACU MMT 002SM

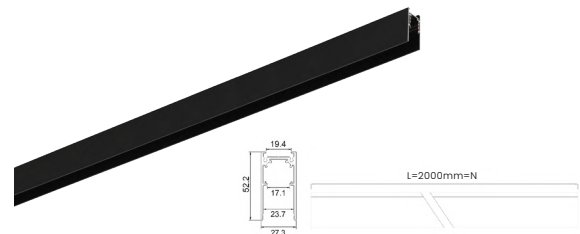

Installation

Surface Mounted

Colors

■ Black □ White


Materials

Aluminum + Copper



ACU MMAC 0226

Right Angle Connecto L-shaperr

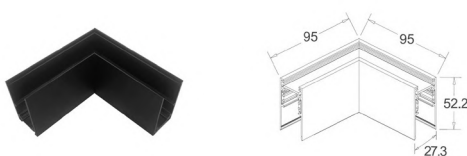

Installation

Surface Mounted

Colors

■ Black □ White

Materials

Aluminum + Copper



ACU MMAC 0227

Outer Angle Connector



Installation

Surface Mounted

Colors

■ Black □ White

Materials


Aluminum + Copper



Surface Mounted

ACU MMAC 0228

Inner Angle Connector

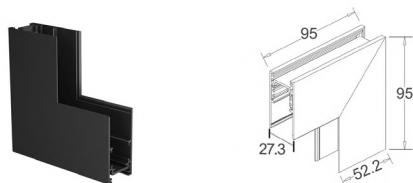

Installation

Surface Mounted

Colors

■ Black □ White


Materials

Aluminum + Copper



ACU MMAC 0252

T connector

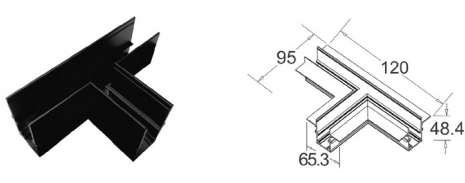

Installation

Surface Mounted

Colors

■ Black □ White


Materials

Aluminum + Copper



ACU MMAC 0253

X connector

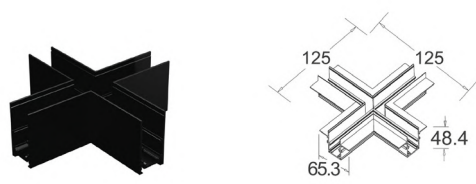

Installation

Surface Mounted

Colors

■ Black □ White

Materials

Aluminum + Copper



ACU MMAC 0225

Suspension Accessories



Installation

Suspension Kit

Materials


Aluminum + Copper



POWER

Accessories

ACU MMAC 0212

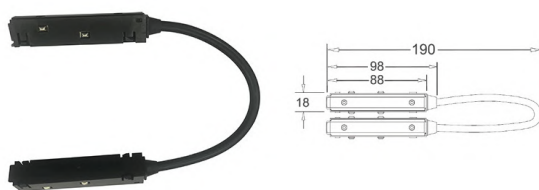

Installation

Magnetic Track Mounted


Colors

■ Black □ White

Corner Power Connector



ACU MMAC 0221

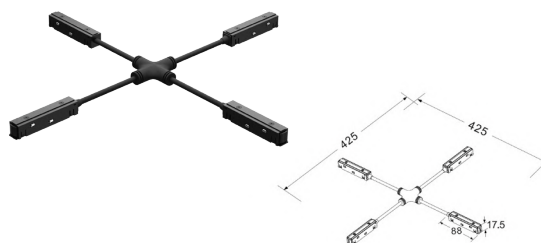

Installation

Magnetic Track Mounted

Colors

■ Black □ White

4-side Power Connector




ACU MMAC 0222




Installation	Colors
Magnetic Track Mounted	■ Black □ White
Triangle Power Connector	  

ACU MMAC 0223

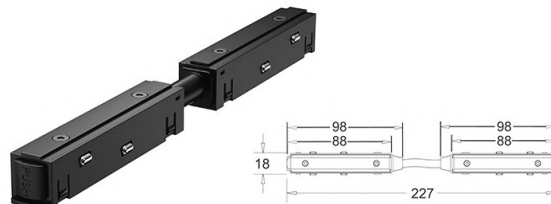


Installation	Colors
Magnetic Track Mounted	■ Black □ White
Straight Power Connector	  

ACU MMAC 0224

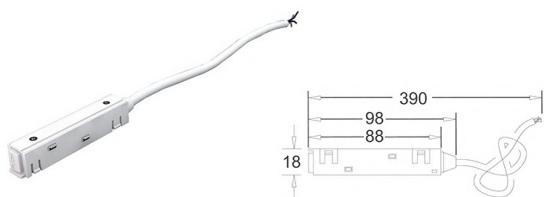

Installation	Colors
Magnetic Track Mounted	■ Black □ White
Power Feeder	  



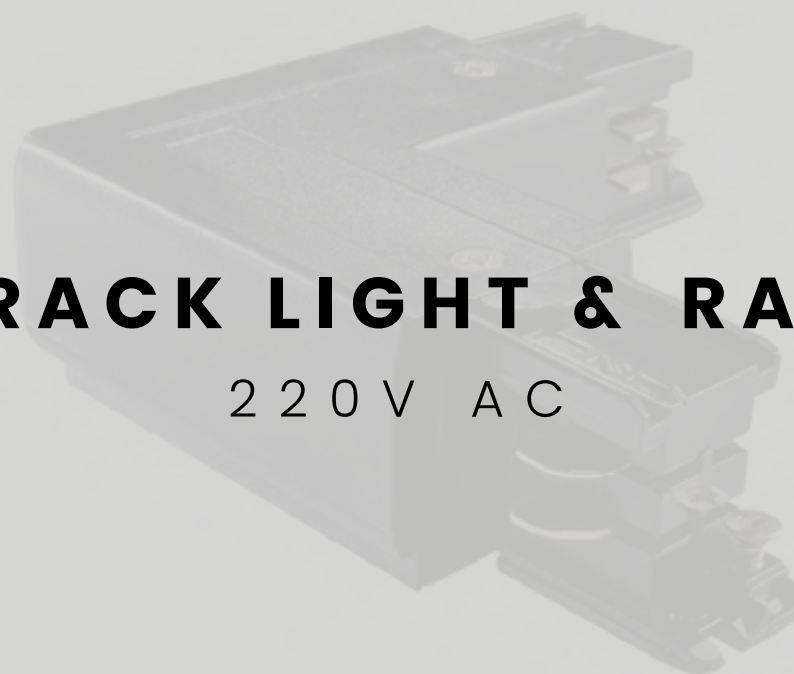


TRACK LIGHT & RAIL

220 V A C

Mensa Track

Track Rail - On/Off


ACU TR 0410R

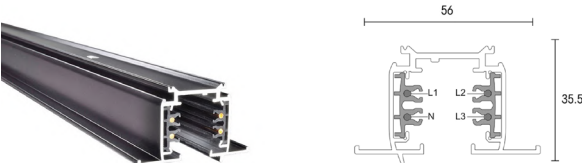

■ Black □ White

Installation	IP RATE
Recessed	20

ACU TR 0410S

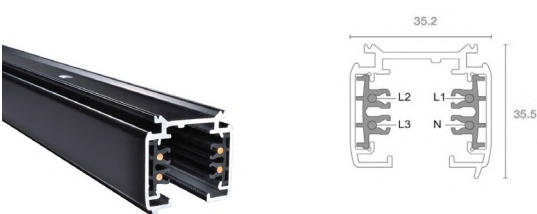

■ Black □ White

Installation	IP RATE
Surface Mounted	20



Mensa Track Accessories

Power Feeder


ACU PF 0431-L



■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU PF 0431-R

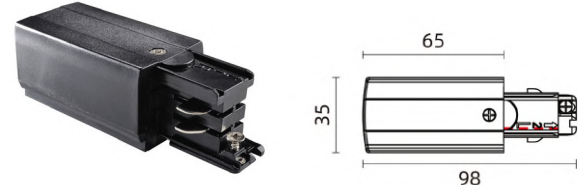

■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0432

End Cap




■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0433

Fixed Straight Power Joiner (M & E)

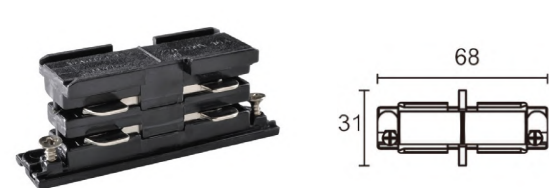

■ Black □ White

Installation	IP RATE
Track Mounted	20



Mensa Track Accessories

Power Feeder

ACU TA M0433

Fixed Straight Joiner (M)



■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU PF 0434

Middle Power Feeder




■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0434C

Cover for Middle Connector

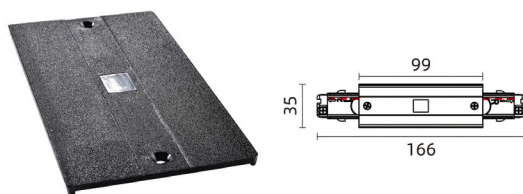


■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0435 Adj

Adjustable Connector

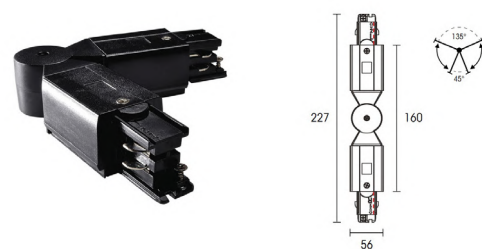

■ Black □ White

Installation	IP RATE
Track Mounted	20




Mensa Track Accessories

L Connector

ACU TA 0435-L

Left Side

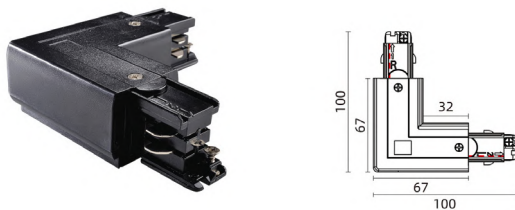


■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0435-R

Right Side

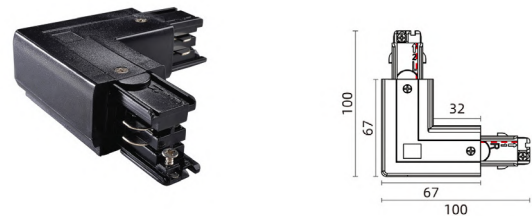

■ Black □ White

Installation	IP RATE
Track Mounted	20

Mensa Track Accessories

Cover for L-Connector

ACU TA 0435C



■ Black □ White

Installation	IP RATE
Track Mounted	20



Mensa Track Accessories

Twisted T Connector L1 → L2

Twisted T Connector R1 → R2

ACU TA 0436-L

Left Side




■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0436-R

Right Side

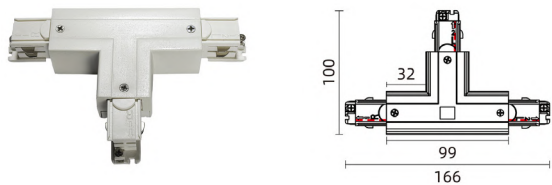

■ Black □ White

Installation	IP RATE
Track Mounted	20

Mensa Track Accessories

Cover for T-Connector

ACU TA 0436C



■ Black □ White


Installation	IP RATE
Track Mounted	20



Mensa Track Accessories

ACU TA 0437

X Connector





■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0437C

Cover for X-Connector




■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0438

Twisted L Connector (L & R)




■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU TA 0439

Flexible Track Rail Connector



■ Black □ White


Installation	IP RATE
Track Mounted	20



Mensa Track – DALI

Track Rail


ACU TR 0610R



■ Black □ White

Installation	IP RATE
Recessed	20
DALI	

ACU TR 0610S



■ Black □ White


Installation	IP RATE
Surface Mounted	20
DALI	

Mensa Track Accessories – Dali

Power Feeder Left Side – DALI

ACU PF 0631-L

Left Side




■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

ACU PF 0631-R

Right Side



■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	




Mensa Track Accessories - Dali

Power Feeder

ACU PF 0631C

Cover for Power Feeder

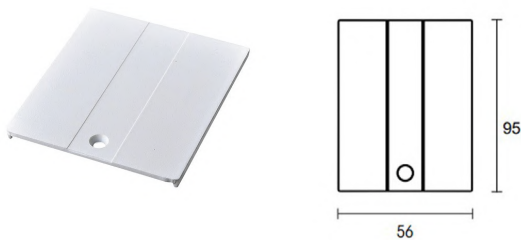


■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

ACU PF 0634

Middle Power Feeder

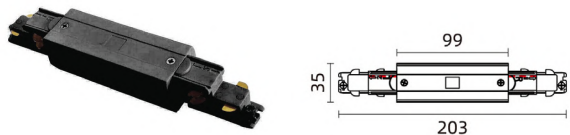


■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

Mensa Track Accessories - Dali

Coupler / Fixed Straight Power Joiner - DALI

ACU TA 0633

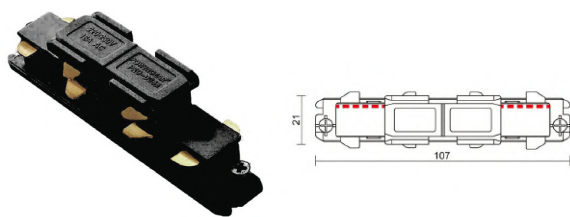

■ Black □ White


Installation	IP RATE
Track Mounted	20
DALI	



Mensa Track Accessories - Dali

L Connector L & R


ACU TA 0635-L

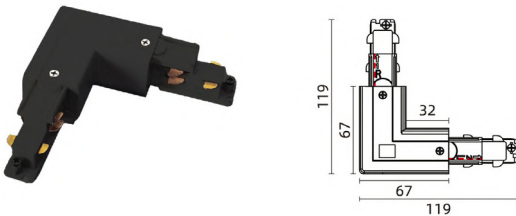

■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

ACU TA 0635-R

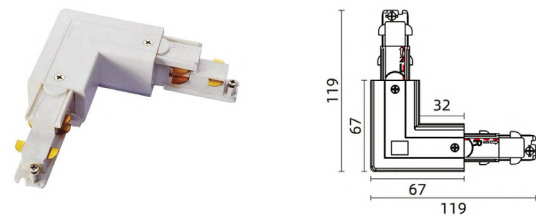


■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

ACU TA 0637

X Connector

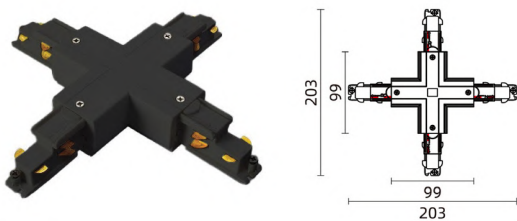

■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

ACU TA 0638

Twisted L Connector (L & R)



■ Black □ White


Installation	IP RATE
Track Mounted	20
DALI	



Mensa Track Accessories – Dali

Flexible Connector

ACU TA 0639

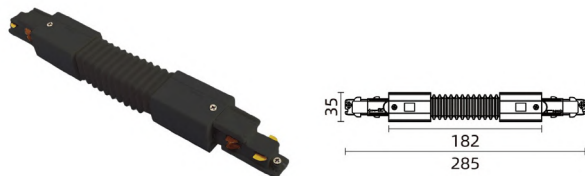


■ Black □ White

Installation	IP RATE
Track Mounted	20
DALI	

Suspension Accessories

ACU SA 04

Mounting Clamp Bracket

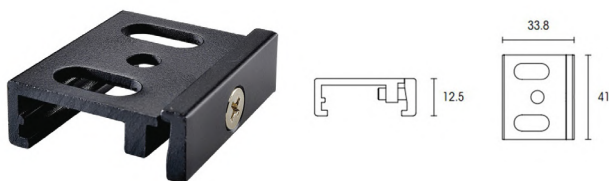


■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU SA 0418

Suspension Connection Clamp

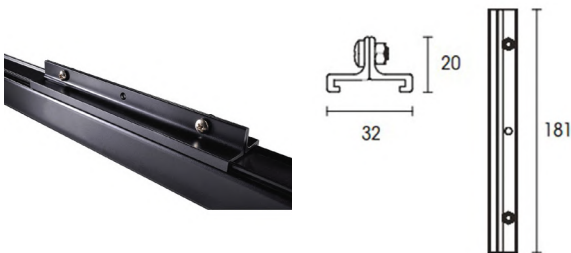

■ Black □ White

Installation	IP RATE
Track Mounted	20



Suspension Accessories

ACU SH 142

Suspension Hook




■ Black □ White

Installation	IP RATE
Track Mounted	20

ACU SR 0447

Ceiling Rod Suspension Kit

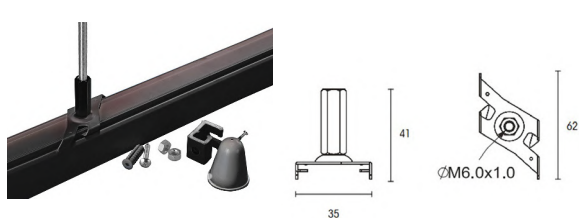


■ Black □ White

Installation	IP RATE
Track Mounted	20

Suspension Accessories

Suspension Kit (Wire)

ACU SW 0448



■ Black □ White


Installation	IP RATE
Track Mounted	20



Mono Track

Mono Track

ACU MT 100

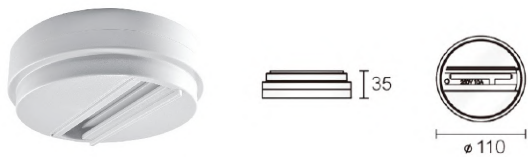

■ Black □ White

Installation	IP RATE
Surface Mounted	20
On / Off	

ACU MT 150



■ Black □ White

Installation	IP RATE
Surface Mounted	20
DALI	





PAVO TRACK

COLLECTION

Pavo is a flexible lighting family designed for residential, hospitality, retail, showroom, and restaurant applications. With high efficiency, multiple beam angles, and several wattage options, it offers precise adjustability, allowing light to be directed easily across different surfaces from a single source.




PAVO TRACK

ROTATABLE LINEAR

Pavo Linear


Rotatable – Linear Light – Track Mounted

ACU TL 244020

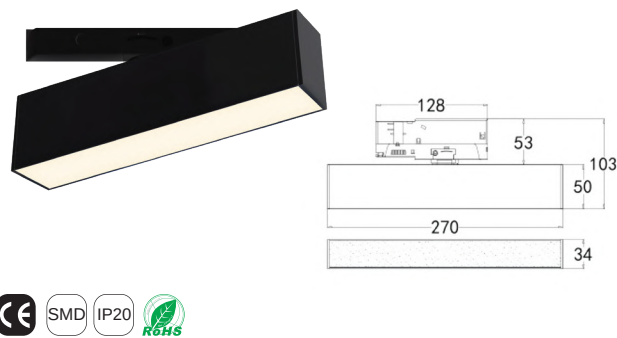

Wattage	Beam Angle
9W	110°
Colors Temperature	Lumen Output
3000k	801 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum

ACU TL 244021

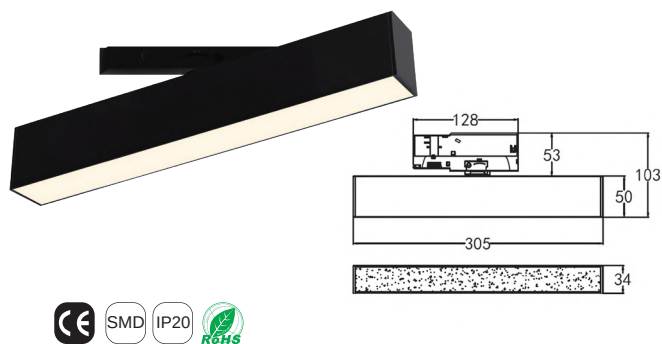


Wattage	Beam Angle
18W	110°
Colors Temperature	Lumen Output
3000k	1440 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum



Pavo Linear

Rotatable – Linear Light – Track Mounted

ACU TL 244022

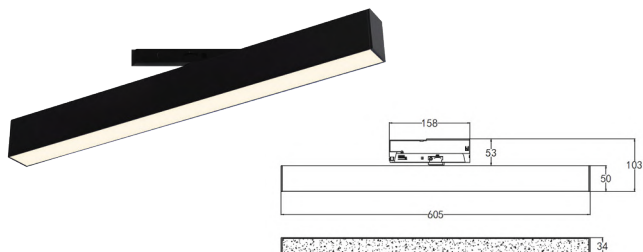

Wattage	Beam Angle
24W	110°
Colors Temperature	Lumen Output
3000k	2390 Lm
Installation	Rated Life Hours
Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum






PAVO TRACK

ADJUSTABLE LINEAR

Pavo Linear


Rotatable & Adjustable - Linear Light - Track Mounted

ACU TL 244025

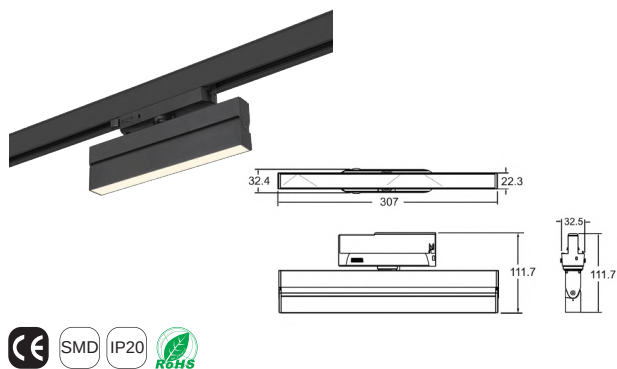

Wattage	Beam Angle
9W	110°
Colors Temperature	Lumen Output
3000k	765 Lm
Installation	Rated Life Hours
Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum

ACU TL 244026

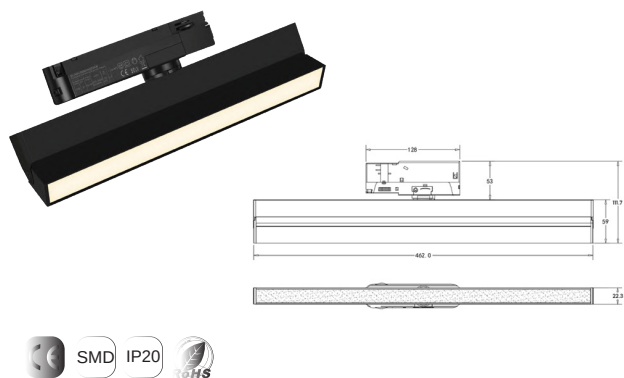


Wattage	Beam Angle
18W	110°
Colors Temperature	Lumen Output
3000k	1531 Lm
Installation	Rated Life Hours
Track Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum



Pavo Linear

Rotatable & Adjustable – Linear Light – Track Mounted

ACU TL 244027



Wattage	Beam angle
24W	110°
Color Temperature	Lumen Output
3000k	1981Lm
Installation	Rated life hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC with (Via the Built In Driver)	Podwer Coated Aluminum






PAVO TRACK
GRAZER



Pavo Grazer

Fixed – Grazer Light – Track Mounted

ACU TL 244030

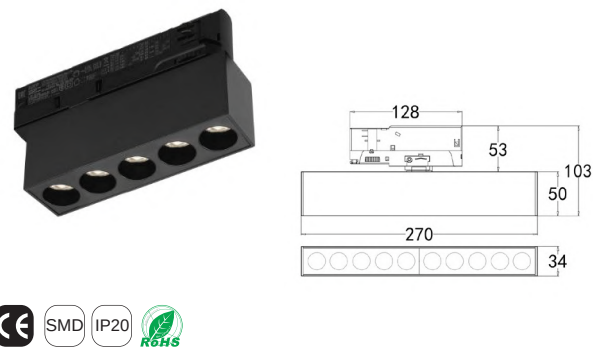

Wattage	Beam Angle
9W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	801 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum

ACU TL 244031




Wattage	Beam Angle
18W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1423 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum



Pavo Grazer

Fixed – Grazer Light – Track Mounted

ACU TL 244032

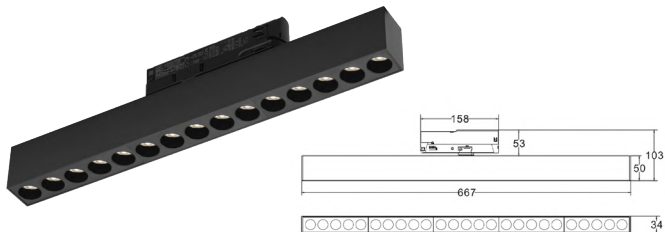

Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2108 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum






PAVO TRACK

ADJUSTABLE GRAZER

Pavo Grazer


Rotatable & Adjustable – Grazer Light – Track Mounted

ACU TL 244035

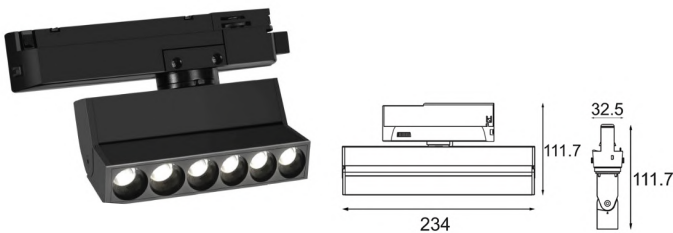

Wattage	Beam Angle
9W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	850 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum

ACU TL 244036

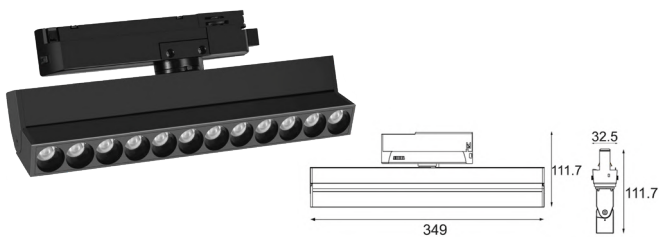

Wattage	Beam Angle
18W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	1539 Lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum






Pavo Grazer

Rotatable & Adjustable – Grazer Light – Track Mounted

ACU TL 244037

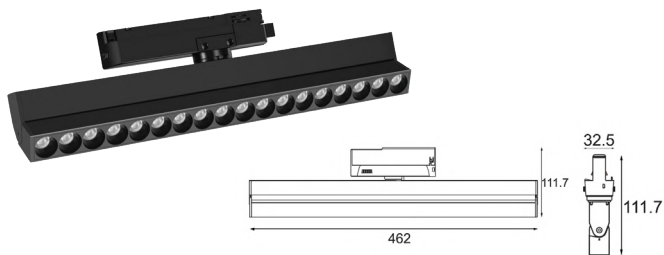

Wattage	Beam Angle
24W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	2263 lm
Installation	Rated Life Hours
Track Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum






HELENE

COLLECTION

Helene


Fixed -Downlight & Spotlight - Recessed

ACU 200801

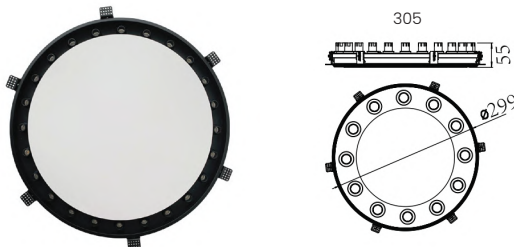

Wattage	Beam Angle
12x2W	12° 24° 36°
Colors Temperature	Lumen Output
3000k	1320 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum

ACU 200802

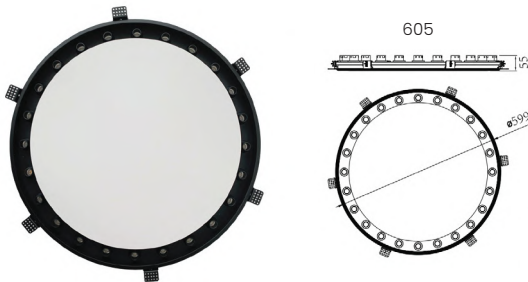

Wattage	Beam Angle
24x2W	12° 24° 36°
Colors Temperature	Lumen Output
3000k	2640 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum



Helene

Fixed -Downlight & Spotlight - Recessed

ACU 200803



Wattage	Beam Angle
36x2W	12° 24° 36°
Colors Temperature	Lumen Output
3000k	3960 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum







PONTO


COLLECTION

Ponto is introduced as a unified-base system that combines general, accent, and decorative lighting in one platform with easy installation. It spans architectural & decorative expressions under one family.

Ponto Base

Trimless

ACU BS 240000T

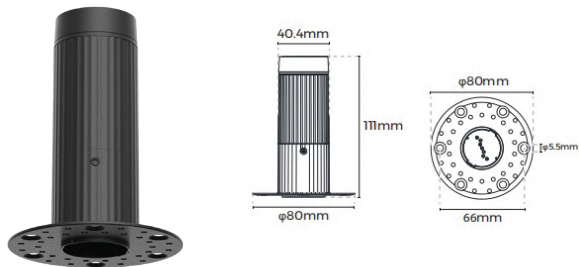


Wattage	Rated Current
150W	3A
CutOut	Maximum load
φ45mm	8Kg
Installation	Colors
Trimless Recessed	■ Black □ White
Materials	Input voltage
Powder Coated Aluminum	24V DC (Via the External Driver)

Ponto Base

Recessed

ACU BS 240000R

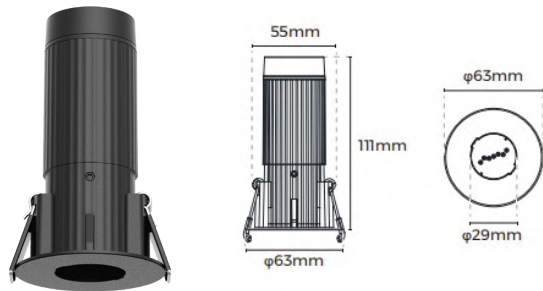

Wattage	Rated Current
150W	3A
CutOut	Maximum load
φ55mm	1Kg
Installation	Colors
Recessed	■ Black □ White
Materials	Input voltage
Powder Coated Aluminum	24V DC (Via the External Driver)



Ponto Spot light

Fixed – Spotlight – Recessed

ACU PS 241000



Wattage	Beam Angle
3W	15° 25°
Colors Temperature	Lumen Output
3000k	126 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto Spot light

Rotatable & Adjustable – Spotlight – Recessed

ACU PTS 241001




Wattage	Beam Angle
6W	24° 36°
Colors Temperature	Lumen Output
3000k	451 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Spot light

Rotatable & Adjustable – Spotlight – Recessed

ACU PTS 241002

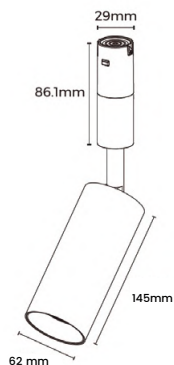

Wattage	Beam Angle
14W	15° 24° 36°
Colors Temperature	Lumen Output
3000k	1057 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto Spot light


Zoomable, Rotatable & Adjustable – Spotlight – Recessed

ACU PTZ 241101

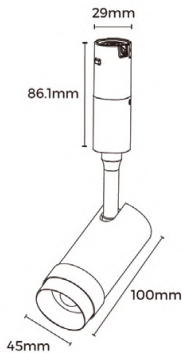

Wattage	Beam Angle
5W	12°-50°
Colors Temperature	Lumen Output
3000k	329 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTZ 241102

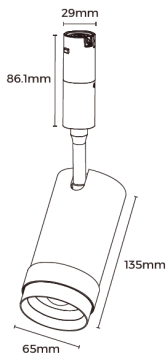

Wattage	Beam Angle
12W	15°-36°
Colors Temperature	Lumen Output
3000k	878 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Round Tube



Asymmetric



Double asymmetric



Wall Washer



Prismatic



Grating




Diffuser



Ponto Linear

Round Tube – Decorative Linear Light – Recessed

ACU PTL 241201

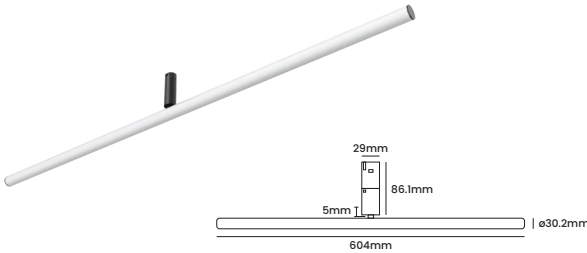


Wattage	Beam Angle
12W	200° x 110°
Colors Temperature	Lumen Output
3000k	1128 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto Linear

Round Tube – Decorative Linear Light – Recessed

ACU PTL 241202

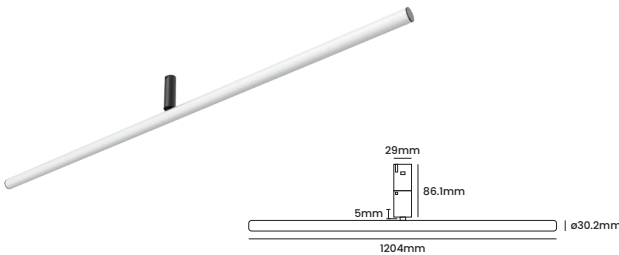


Wattage	Beam Angle
24W	200° x 110°
Colors Temperature	Lumen Output
3000k	2256 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	□ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto Linear

Linear – Normal Diffuser –Decorative Linear Light – Suspended

ACU PTL 241301

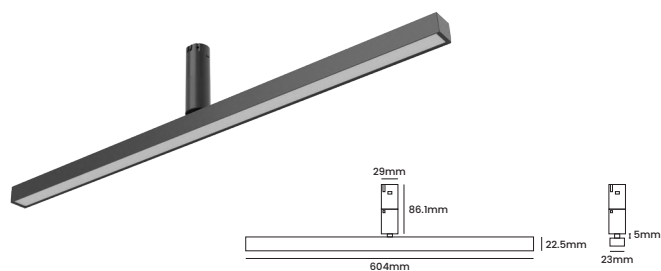


Wattage	Beam Angle
12W	110°
Colors Temperature	Lumen Output
3000k	846 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto Linear

Linear – Normal Diffuser –Decorative Linear Light – Suspended

ACU PTL 241302

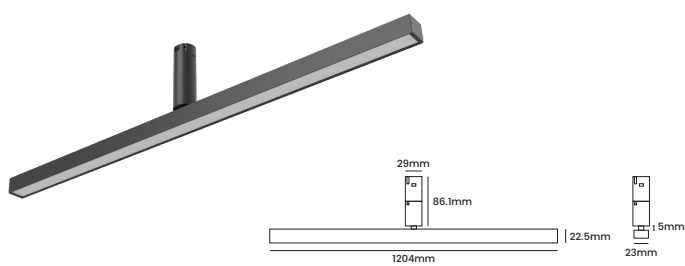


Wattage	Beam Angle
24W	110°
Colors Temperature	Lumen Output
3000k	1692 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear

Linear – Normal Diffuser – Linear Light – Suspended

ACU PTL 241801

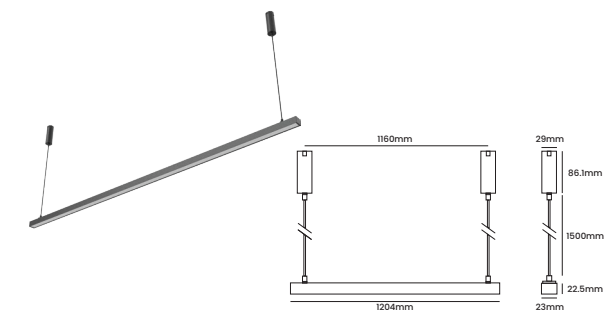


Wattage	Beam Angle
24W	110°
Colors Temperature	Lumen Output
3000k	1692 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear


Linear – Prismatic Diffuser – Rotatable – Recessed

ACU PTL 241401

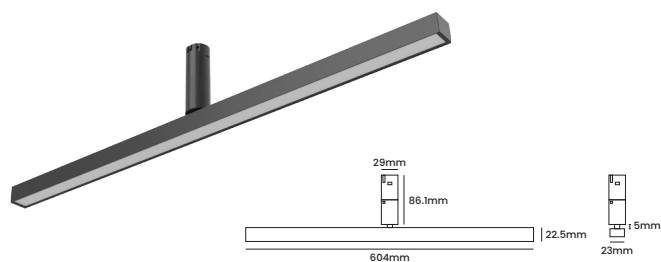

Wattage	Beam Angle
12W	70°
Colors Temperature	Lumen Output
3000k	846 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTL 241402

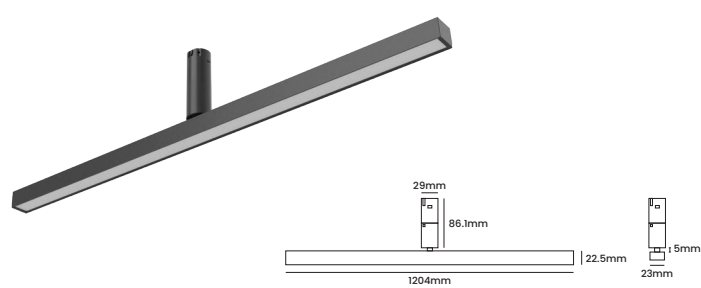


Wattage	Beam Angle
24W	70°
Colors Temperature	Lumen Output
3000k	1692 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear

Linear – Prismatic Diffuser – Linear Light – Suspended

ACU PTL 241901

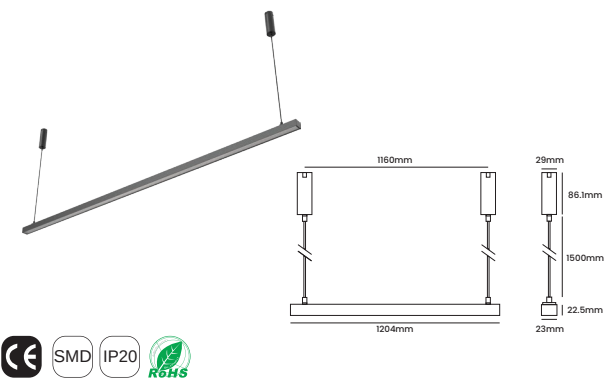

Wattage	Beam Angle
24W	70°
Colors Temperature	Lumen Output
3000k	1800 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto Linear


Linear – Grating Diffuser – Rotatable – Decorative Linear Light – Recessed

ACU PTL 241501

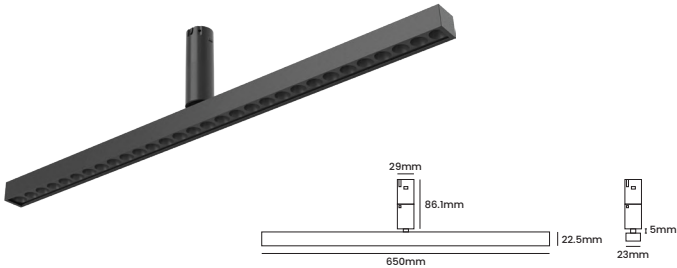

Wattage	Beam Angle
13W	30°
Colors Temperature	Lumen Output
3000k	858 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTL 241502

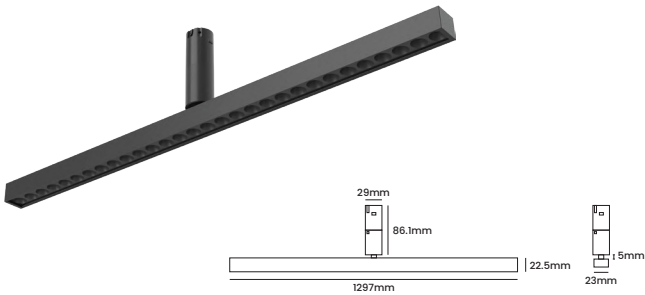


Wattage	Beam Angle
26W	30°
Colors Temperature	Lumen Output
3000k	1716 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear

Linear – Grating Diffuser – Downlight – Suspended

ACU PTL 242001

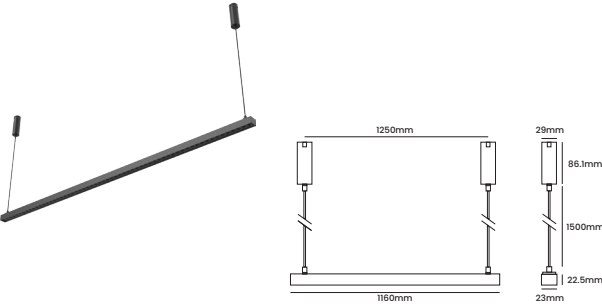


Wattage	Beam Angle
26W	30°
Colors Temperature	Lumen Output
3000k	1710 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear


Linear – Asymmetric Diffuser – Rotatable – Decorative Linear Light – Recessed

ACU PTL 241601

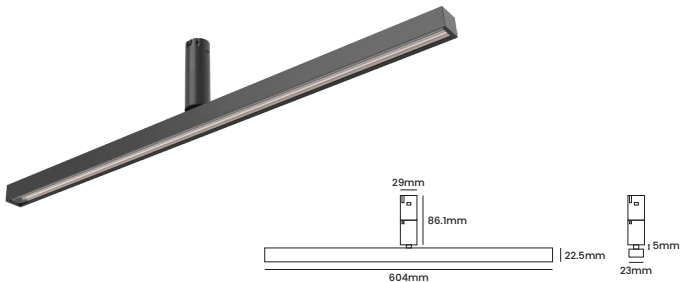

Wattage	Beam Angle
12W	90° x 45° x 15°
Colors Temperature	Lumen Output
3000k	1128 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTL 241602

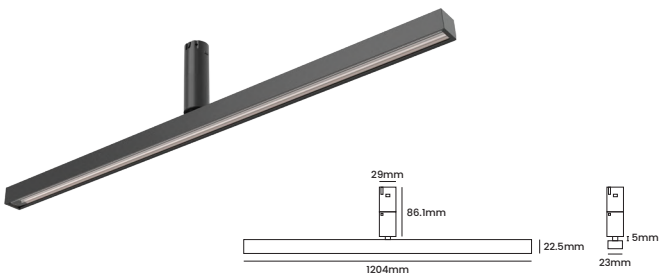


Wattage	Beam Angle
24W	90° x 45° x 15°
Colors Temperature	Lumen Output
3000k	2256 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Linear


Linear – Double Asymmetric Diffuser – Rotatable – Decorative Linear Light – Recessed

ACU PTL 241701

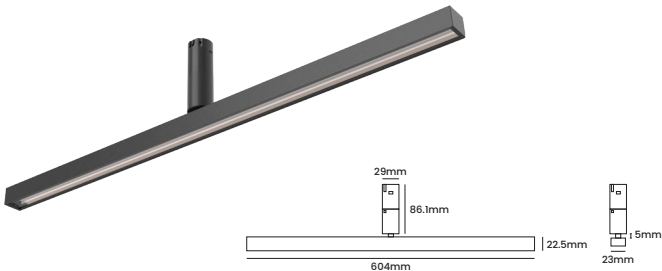

Wattage	Beam Angle
12W	100° x 90° x 15°
Colors Temperature	Lumen Output
3000k	1128 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU PTL 241702

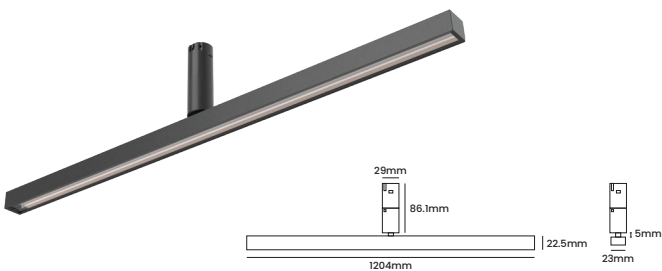

Wattage	Beam Angle
24W	100° x 90° x 15°
Colors Temperature	Lumen Output
3000k	2256 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto Up-Down

Linear - Up-Downlight - Suspended - Normal Diffuser


ACU PTL 242101

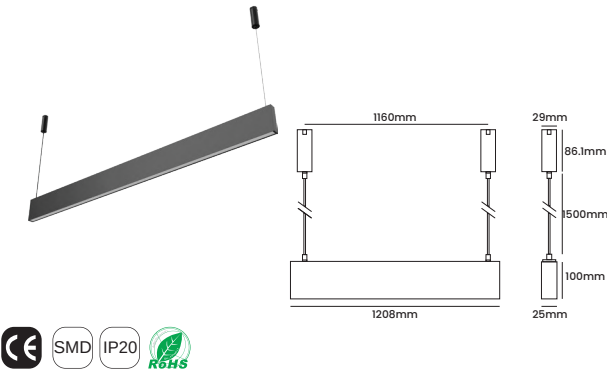

Wattage	Beam Angle
48W	Up: 100° , Down: 100°
Colors Temperature	Lumen Output
3000k	2707 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Prismatic Diffuser

ACU PTL 242201

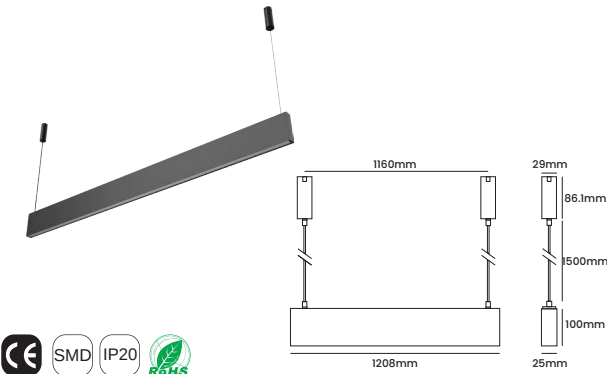


Wattage	Beam Angle
48W	Up: 100° , Down: 100°
Colors Temperature	Lumen Output
3000k	2797 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto Up-Down

Linear - Up-Downlight - Suspended - Grating Diffuser

ACU PTL 242301

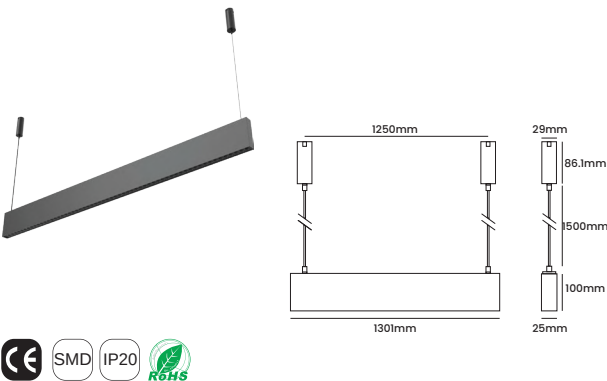

Wattage	Beam Angle
53W	Up:100° , Down: 100°
Colors Temperature	Lumen Output
3000k	2571 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto Linear


Rotatable – Spoon Wall Washer – Recessed

ACU WW 242401

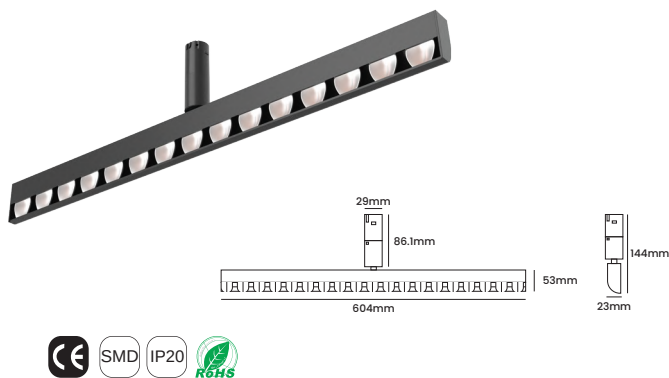

Wattage	Beam Angle
10W	60° X 25° X 73°
Colors Temperature	Lumen Output
3000k	846 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU WW 242402

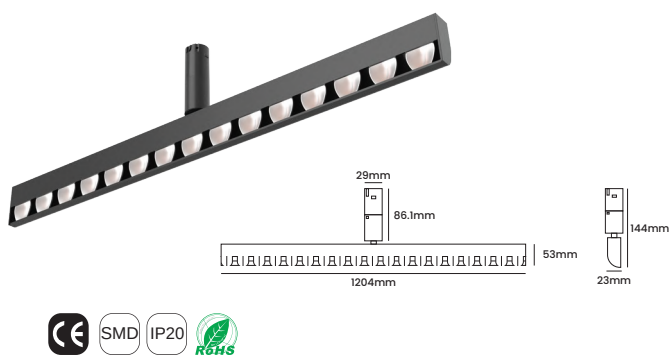

Wattage	Beam Angle
20W	60° X 25° X 73°
Colors Temperature	Lumen Output
3000k	1692 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto


Decorative Round Neon Flex – 2 base suspended

ACU WW 242501

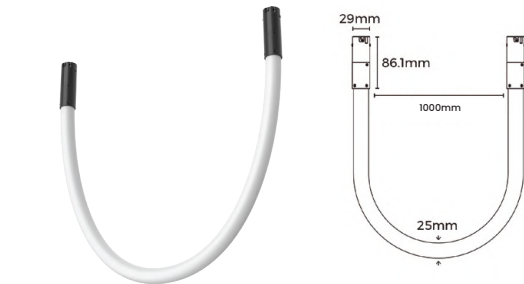

Wattage	Beam Angle
14W	360°
Colors Temperature	Lumen Output
3000k	920 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Silicon Neon Flex

ACU WW 242502

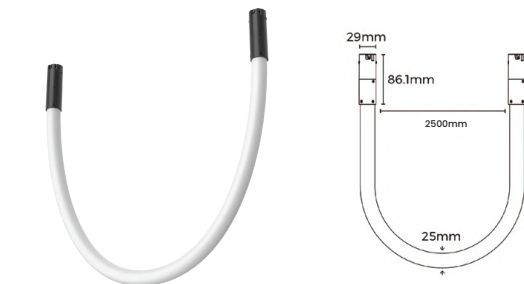


Wattage	Beam Angle
35W	360°
Colors Temperature	Lumen Output
3000k	2300 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Silicon Neon Flex



Ponto

Decorative Round Neon Flex – 2 base suspended

ACU WW 242503

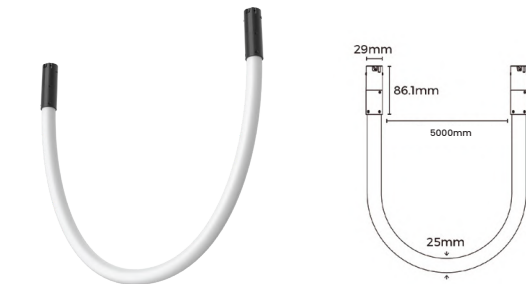


Wattage	Beam Angle
70W	360°
Colors Temperature	Lumen Output
3000k	4600 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Silicon Neon Flex

Ponto

Decorative – Spotlight – Suspended

ACU PTD 242601

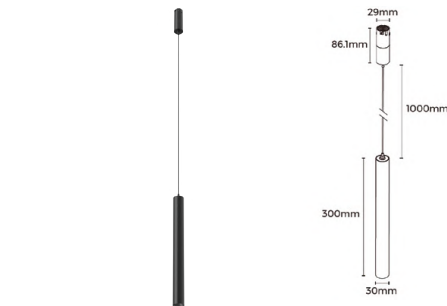


Wattage	Beam Angle
6W	24°
Colors Temperature	Lumen Output
3000k	370 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	☒ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Ponto

Decorative – Spotlight –Suspended

ACU PTD 242602

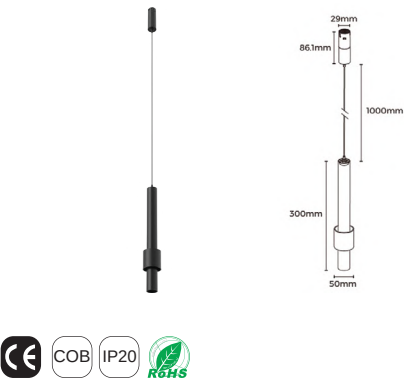


Wattage	Beam Angle
6W	24°
Colors Temperature	Lumen Output
3000k	370 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto

Decorative – Neon Flex – Suspended

ACU PTD 242603

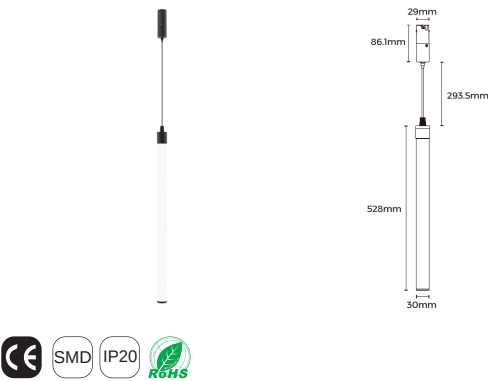

Wattage	Beam Angle
7W	360°
Colors Temperature	Lumen Output
3000k	460 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Silicon Neon Flex






Ponto

Decorative – Ball – Suspended

ACU PTD 242604

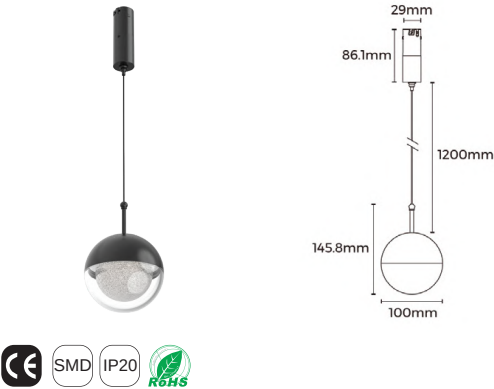


Wattage	Beam Angle
6W	360°
Colors Temperature	Lumen Output
3000k	560 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Ponto

Decorative – Water Drop – Suspended

ACU PTD 242605

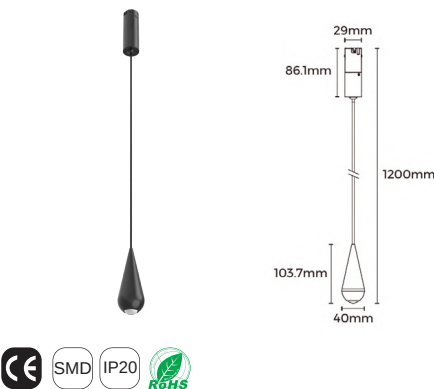

Wattage	Beam Angle
4W	110°
Colors Temperature	Lumen Output
3000k	340 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Ponto

Decorative – Sunset – Pendant

ACU PTD 242606

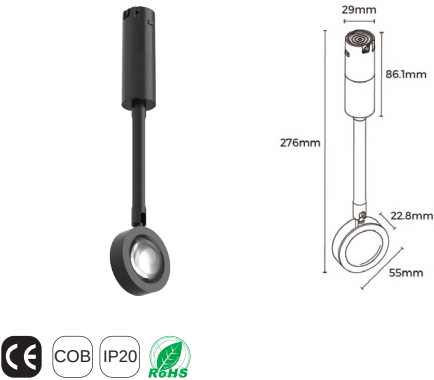

Wattage	Beam Angle
3W	110°
Colors Temperature	Lumen Output
1500 k	170 Lm
Installation	Rated Life Hours
Mounted on a Common Base	30,000 – 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum





FEATURED DESIGNS



The Featured Design Collection presents lighting pieces with a stronger artistic and decorative presence. These are not only functional fixtures, but design statements that add character, identity, and emotion to space.

From sculptural decorative lights to special-effect pieces, mirrors, and design-led products, this collection is curated for projects that need a memorable visual element where light becomes part of the story, not only part of the system.



ELARA


C O L L E C T I O N

Elara is an adjustable recessed spotlight with a decorative-design character, combining focused accent performance with a more expressive visual presence. It is positioned for premium interiors where decorative intent and technical lighting both matter.

Elara

Adjustable – Decorative – Spotlight & downlight – Recessed

ACU 200701

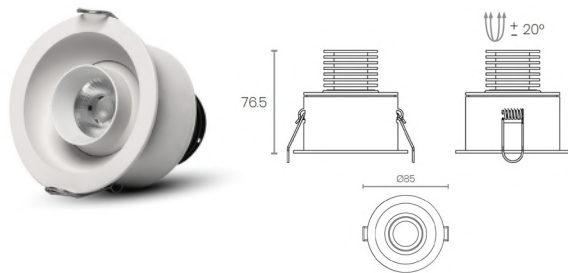

Wattage	Beam Angle
8W	24° 36°
Colors Temperature	Lumen Output
3000k	664 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the External Attached Driver)	Powder Coated Aluminum






Drop is a suspended decorative pendant with a compact and refined expression. It is positioned as a small decorative piece that adds focused visual interest and works well inside layered interior lighting compositions.



Drop

Decorative - Pendant

ACU 238001

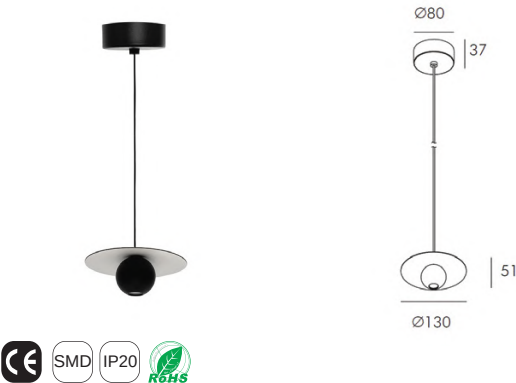

Wattage	Beam Angle
5W	20° 35°
Colors Temperature	Lumen Output
3000k	341 Lm
Installation	Rated Life Hours
Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU 238002




Wattage	Beam Angle
5W	35°
Colors Temperature	Lumen Output
3000k	341 Lm
Installation	Rated Life Hours
Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



MOONLINE

C O L L E C T I O N

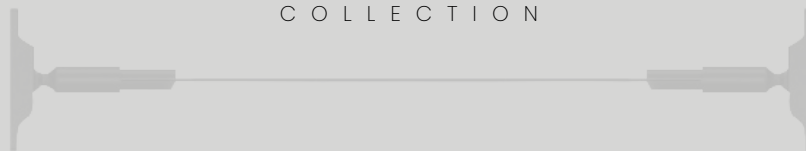


Monoline is a decorative feature-light family with a soft and expressive point-to-point identity. It is positioned as a visual design feature than a conventional technical fixture, making it suitable for mood-led and premium interior applications.

Moonline


Decorative - Feature Light - Point to Point

ACU MOON 01

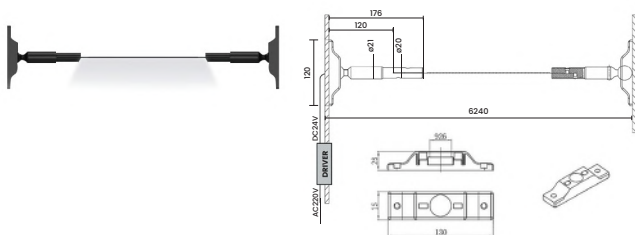

Wattage	Beam Angle
10 W/m	120°
Colors Temperature	Lumen Output
3000k	≈910 Lm/m
Installation	Rated Life Hours
Point to Point	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Dimension	Cutting Section
L 6000mm x W 8mm	29.41 mm
Input Voltage	Materials
24V DC (Via the External Driver)	Zinc alloy, spraying surface, steel belt (stainless steel)

ACU MOON 02

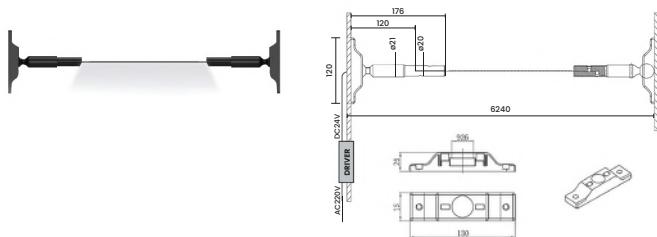


Wattage	Beam Angle
13.5 W/m	120°
Colors Temperature	Lumen Output
3000k	≈1320 Lm/m
Installation	Rated Life Hours
Point to Point	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Dimension	Cutting Section
L 6000mm x W 8mm	50 mm
Input Voltage	Materials
24V DC (Via the External Driver)	Zinc alloy, spraying surface, steel belt (stainless steel)



Moonline


Decorative - Feature Light - Point to Point

ACU MOON 03

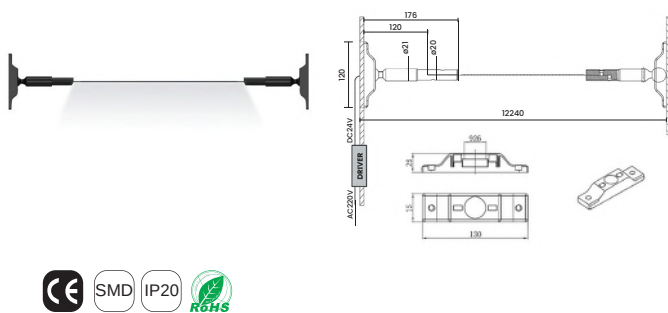

Wattage	Beam Angle
8.7 W/m	120°
Colors Temperature	Lumen Output
3000k	≈890 lm/m
Installation	Rated Life Hours
Point to Point	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Dimension	Cutting Section
L 12000mm x W 8mm	50 mm
Input Voltage	Materials
24V DC (Via the External Driver)	Zinc alloy, spraying surface, steel belt (stainless steel)

ACU MOON 04

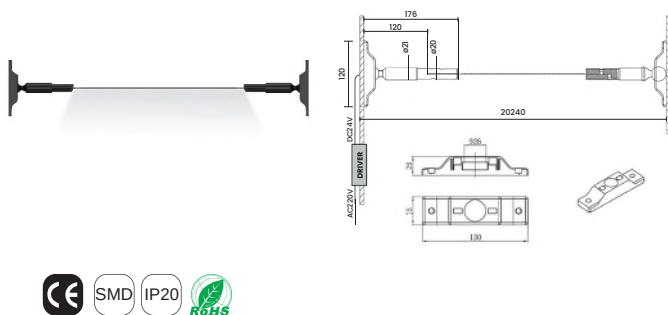

Wattage	Beam Angle
8.7 W/m	120°
Colors Temperature	Lumen Output
3000k	≈890 lm/m
Installation	Rated Life Hours
Point to Point	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Dimension	Cutting Section
L 20000mm x W 8mm	50 mm
Input Voltage	Materials
24V DC (Via the External Driver)	Zinc alloy, spraying surface, steel belt (stainless steel)








Sleek is a decorative feature-light family with a clean, minimal, and sculptural identity. It is organized into suspended, wall-mounted, and floor-mounted forms, allowing the same design language to appear across different decorative applications.

Sleek


Decorative - Feature Light - Suspended

ACU 235001

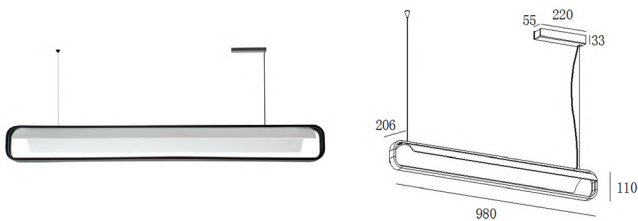

Wattage	Beam Angle
27W	--
Colors Temperature	Lumen Output
3000k	Decorative Lumen Effect
Installation	Rated Life Hours
Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via The Built In Driver)	Powder Coated Aluminum

ACU 235002

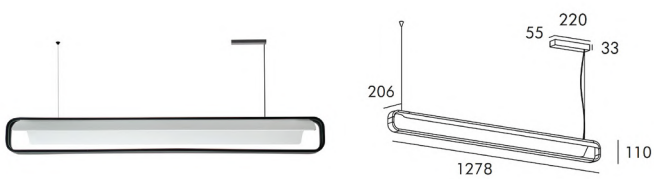


Wattage	Beam Angle
35W	--
Colors Temperature	Lumen Output
3000k	Decorative Lumen Effect
Installation	Rated Life Hours
Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via The Built In Driver)	Powder Coated Aluminum



Sleek

Decorative – Feature Light – Wall Mounted

ACU 235003

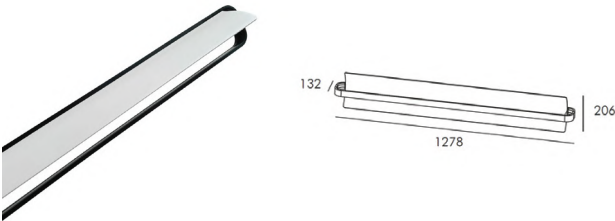


Wattage	Beam Angle
20W	--
Colors Temperature	Lumen Output
3000k	Decorative Lumen Effect
Installation	Rated Life Hours
Wall Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via The Built In Driver)	Powder Coated Aluminum

Sleek

Decorative – Feature Light – Floor Mounted

ACU 235004

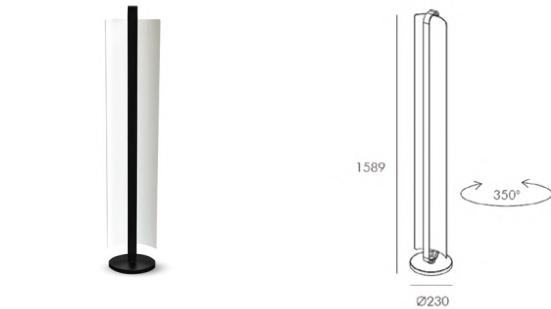

Wattage	Beam Angle
27W	--
Colors Temperature	Lumen Output
3000k	Decorative Lumen Effect
Installation	Rated Life Hours
Floor Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via The Built In Driver)	Die Cast Aluminum Die Cast Aluminum
ROTARY DIMMABLE SWITCH	








Glance is a decorative feature-light family with wall-mounted and suspended forms. It is positioned as a mood-oriented design-led product family, giving interiors a soft, broad decorative light character.

Glance

Decorative - Feature Light - Wall Mounted

ACU 234001

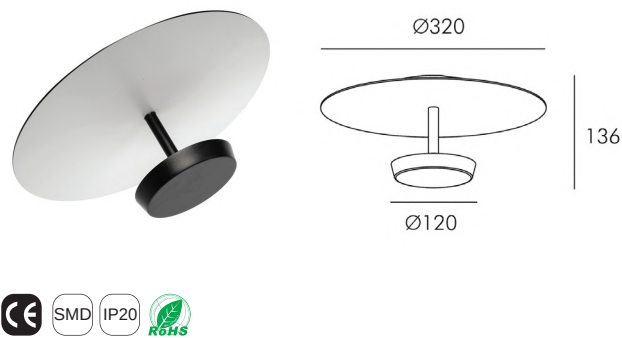

Wattage	Beam Angle
12W	110°
Colors Temperature	Lumen Output
3000k	Decorative Lumen Effect
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Iron + Aluminum

Glance

Decorative - Feature Light - Suspended

ACU 234002



Wattage	Beam Angle
12W	110°
Colors Temperature	Lumen Output
3000k	Decorative Lumen Effect
Installation	Rated Life Hours
Suspended	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Iron + Aluminum







ORION


C O L L E C T I O N

Orion is a decorative wall-light family with a focused modern expression. It belongs to the design-led side of the indoor range and works as a compact feature piece for mood and decorative wall lighting.

Orion

Decorative - Wall Light - Wall Mounted

ACU 236001



Wattage	Beam Angle
7W	45°
Colors Temperature	Lumen Output
3000k	364 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum
Dimmable	
Wireless Phone Charger	





STICK

C O L L E C T I O N

Stick is a design-led decorative indoor product with a strong visual identity. It belongs to the decorative indoor layer and is positioned more as a feature piece than a standard technical fixture.

Stick

Decorative – Planted

ACU LS 231101




Wattage	Beam Angle
1W	180°
Colors Temperature	Lumen Output
3000k	Decorative Lumen Effect
Installation	Rated Life Hours
Planted	30,000 – 50,000H
CRI	Colors
≥80	■ Black □ White
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum + PC






Miralo is a refined collection of illuminated mirrors where form meets function. It is designed to enhance modern interiors by combining sophisticated aesthetics with smart touch technology, turning the mirror into both a design statement & a controlled lighting element.


ACU MR 6080-B



ACU MR 80100-B



ACU MR 100120-B



Technical Features

- Sleek black Aluminum frame.
- Integrated LED strip light (10W/m), IP44.
- Explosion-proof backing for safety comparable to tempered glass.

Smart 3-key touch interface for smooth control:



Touch-sensitive On/Off button.




Dimming function via long press-on.




Selectable lighting Colors temperatures: 3000K - 4500K - 6000K




ACU MR D60-B



ACU MR D80-B



ACU MR D100-B

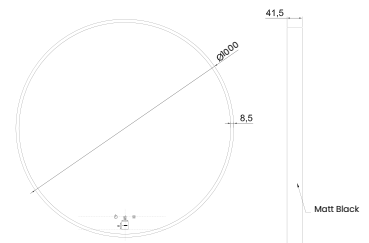

Technical Features

- Sleek black Aluminum frame.
- Integrated LED strip light (10W/m), IP44.
- Explosion-proof backing for safety comparable to tempered glass.

Smart 3-key touch interface for smooth control:



Touch-sensitive On/Off button.



Dimming function via long press-on.



Selectable lighting Colors temperatures: 3000K -4500K-6000K





WATER RIPPLE LIGHT

C O L L E C T I O N


Water Ripple Light is a special-effect decorative product that creates a liquid-like projected pattern across surfaces, transforming the space into a calmer, immersive atmosphere. It is explicitly positioned as a design-driven effect light rather than a standard fixture.

Water Ripple Light

Product Code

ACU WTR 266001


Wattage: 52W

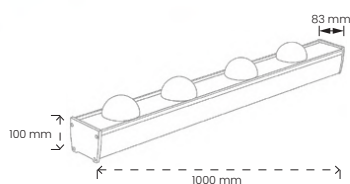

Product Code

ACU WTR 266002

Wattage: 26W



Luminaire Data

Source Type: LED | CCT: RGBW K | Beam Angle: 120° | Colors Rendering Index: 90
Finish Colors: Dark gray | Materials: Aluminum & Acrylic



Powered by an advanced RGBW core, the system delivers a vivid spectrum of Colors and exceptional brightness, producing a dynamic water-ripple effect that transforms any environment into a visually fluid and immersive atmosphere.

OUTDOOR LIGHTING



The Outdoor Collection is designed to extend the identity of a space beyond the interior. From façade lighting and landscape illumination to pathways, steps, walls, gardens, and architectural features, this collection helps shape how buildings and outdoor areas are seen, experienced, and remembered after sunset.

Each product is selected to balance performance, durability, and design impact revealing textures, guiding movement, highlighting greenery, and giving every project a strong night identity.



AURIGA


I P 6 7 L E D S t r i p L i g h t

A modern outdoor lighting solution providing soft, continuous indirect illumination, creating a comfortable and inviting atmosphere. Ideal for ceilings, coves, and shelving, with a sleek design that combines functionality and contemporary style.

Auriga


Ip67 Led Strip Light Surface Mounted

ACU ST 17051

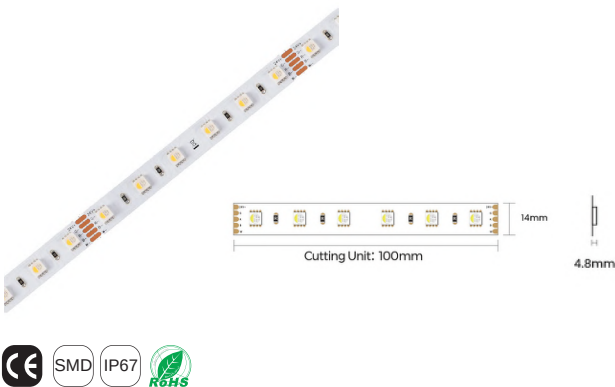

Wattage	Beam Angle
19 W/m	120°
Colors Temperature	Lumen Output
RGBW3000	616 Lm/m
CRI	Rated Life Hours
≥90	30,000 - 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

ACU ST 17054

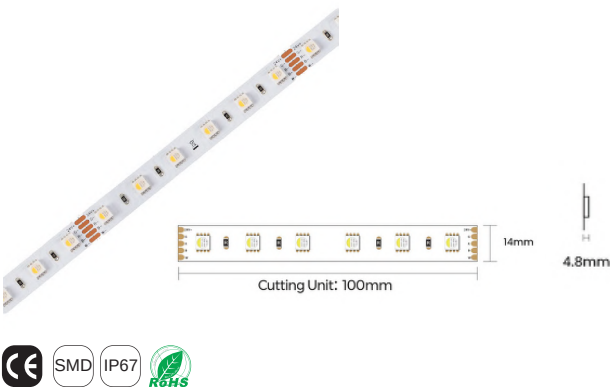

Wattage	Beam Angle
5 W/m	120°
Colors Temperature	Lumen Output
RGBW3000	154 Lm/m
CRI	Rated Life Hours
≥90	30,000 - 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips



Auriga


Ip67 Led Strip Light Surface Mounted –SMD

ACU ST 17057



Wattage	Beam Angle
4.8 W/m	120°
Colors Temperature	Lumen Output
3000k	475 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

ACU ST 17058

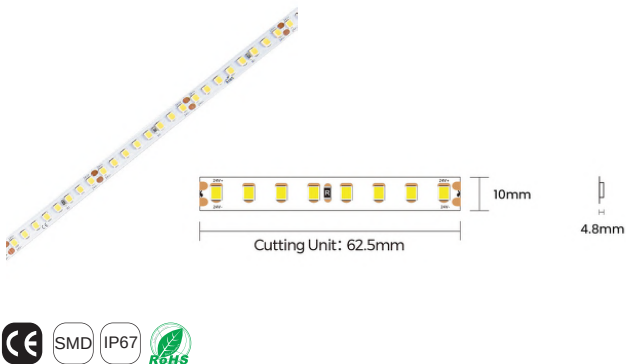

Wattage	Beam Angle
9.6 W/m	120°
Colors Temperature	Lumen Output
3000k	960 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips






Auriga


Ip67 Led Strip Light Surface Mounted –SMD

ACU ST 17059

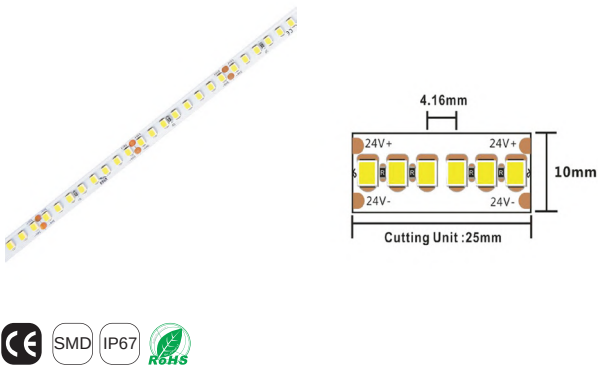

Wattage	Beam Angle
19 W/m	120°
Colors Temperature	Lumen Output
3000k	1445 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

ACU ST 17059C

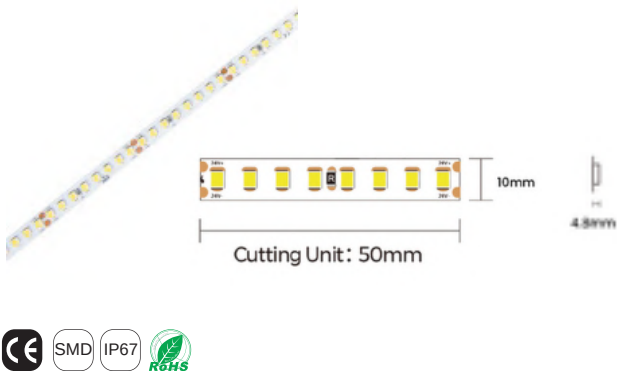


Wattage	Beam Angle
14.4 W/m	120°
Colors Temperature	Lumen Output
3000k	1395 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips



Auriga


Ip67 Led Strip Light Surface Mounted –SMD

ACU ST 202111

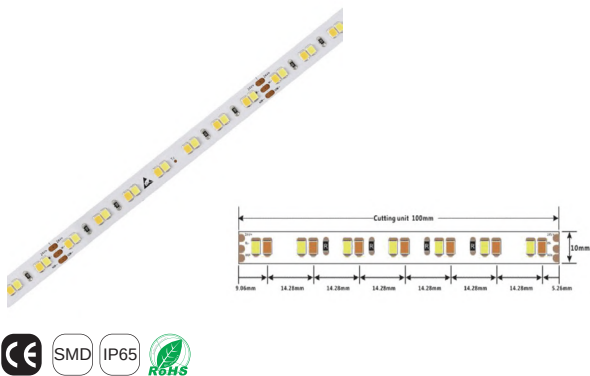

Wattage	Beam Angle
9.6 W/m	120°
Colors Temperature	Lumen Output
Tuneable 2700–6000K	750 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

ACU ST 202101

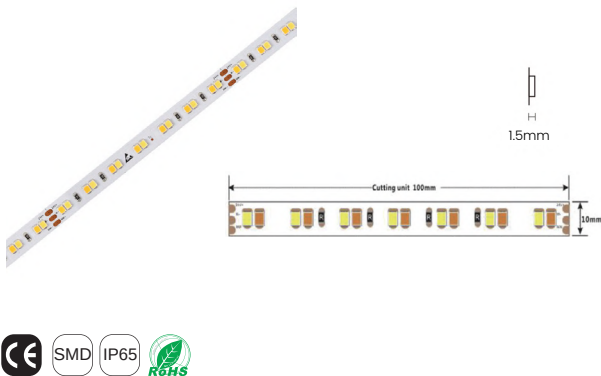

Wattage	Beam Angle
19 W/m	120°
Colors Temperature	Lumen Output
Tuneable 2700–6000K	1505 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips





Auriga Amber

IP67 – Amber – LED Strip Light – SMD – Surface Mounted

ACU ST 202102



Wattage	Beam Angle
10 W/m	120°
Colors Temperature	Lumen Output
3000k	730 lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips

Auriga

Ip67 Led Strip Light Surface Mounted – COB

ACU ST 202001



Wattage	Beam Angle
10 W/m	120°
Colors Temperature	Lumen Output
3000k	790 lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips





Auriga

Ip67 Led Strip Light Surface Mounted –COB

ACU ST 202002



Wattage	Beam Angle
5 W/m	120°
Colors Temperature	Lumen Output
3000k	410 Lm/m
CRI	Rated Life Hours
≥90	30,000 – 50,000H
Materials	Colors
FPC (Flexible Printed Circuit)	☐ Transparent
Input Voltage	Installation
24V DC (Via the External Driver)	Strip Light Accessories Profile & Clips





UP LIGHT


C O L L E C T I O N

The Up light Series for outdoor inground installation represents essential fixtures for lighting architectural elements or trees. Different wattage and shape types make the selection of an applicable product easier. Available with special components that provide visual comfort.

Up Light

Surface Mounted

ACU OSM 182015

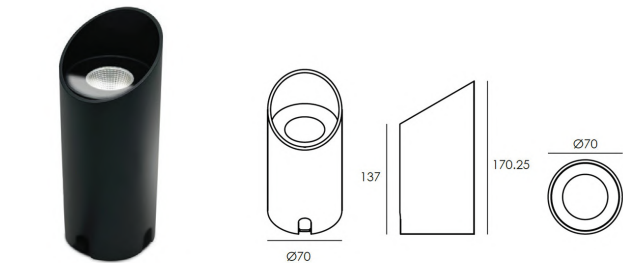

Wattage	Beam Angle
1x5W	18° 24° 32°
Colors Temperature	Lumen Output
3000k	≈460 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

Up Light

Inground Recessed

ACU OU 182001M




Wattage	Beam Angle
1x0.5W	70°
Colors Temperature	Lumen Output
3000k	≈23 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	24V DC (Via the External Driver)



Up Light

Inground Recessed

ACU OU 182001MS

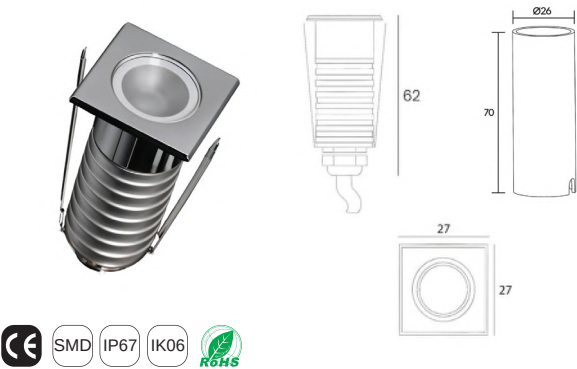

Wattage	Beam Angle
1x0.5W	70°
Colors Temperature	Lumen Output
3000k	≈23 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	24V DC (Via the External Driver)

ACU OU 182001H




Wattage	Beam Angle
1x1.5W	10° 15° 20° 30°
Colors Temperature	Lumen Output
3000k	≈136 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	24V DC (Via the External Driver)



Up Light


Inground Recessed

ACU OU 182001SH

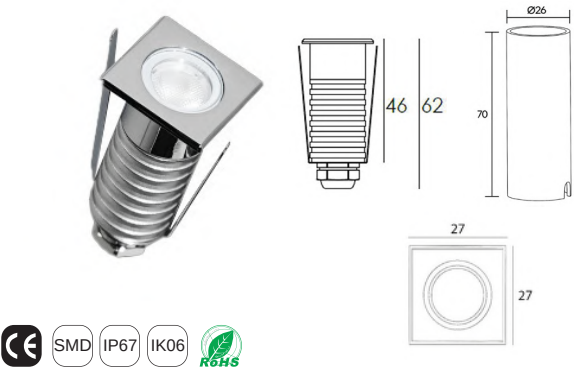

Wattage	Beam Angle
1x1.5W	10° 15° 20° 30°
Colors Temperature	Lumen Output
3000k	≈136 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	24V DC (Via the External Driver)

ACU OU 252001H

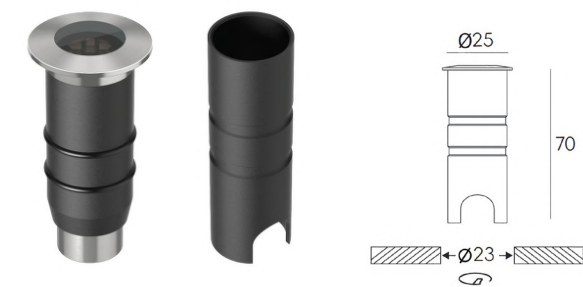

Wattage	Beam Angle
1.5 W	20° 30°
Colors Temperature	Lumen Output
3000k	≈60 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Materials	Input Voltage
316 Stainless Steel Frame Body: Powder Coated Aluminum	24V DC (Via the External Driver)



Up Light

Inground Recessed

ACU OU 182002A



Wattage	Beam Angle
1x2 W	35° / 45° Asymmetrical
Colors Temperature	Lumen Output
3000k	≈130 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)

ACU OU 182002H



Wattage	Beam Angle
1x2W	9° 15° 20° 30° 45° 60°
Colors Temperature	Lumen Output
3000k	≈143 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)






Up Light


Inground Recessed

ACU OU 182002SH

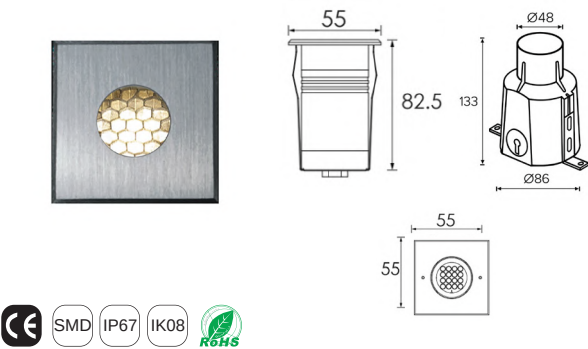

Wattage	Beam Angle
1x2W	9° 15° 20° 30° 45° 60°
Colors Temperature	Lumen Output
3000k	≈143 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)

ACU OU 252002H

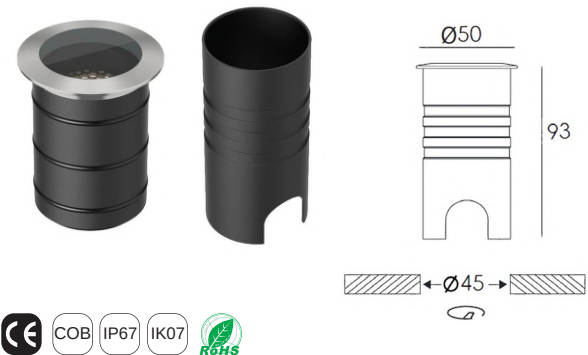

Wattage	Beam Angle
3.5 W	8° 12° 20° 30° 40°
Colors Temperature	Lumen Output
3000k	≈120 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Materials	Input Voltage
316 Stainless Steel Frame Body: Powder Coated Aluminum	24V DC (Via the External Driver)



Up Light


Inground Recessed

ACU OU 182003MH



Wattage	Beam Angle
1x4 W	9° 15° 30° 45°
Colors Temperature	Lumen Output
3000k	≈200 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)

ACU OU 182003MSH

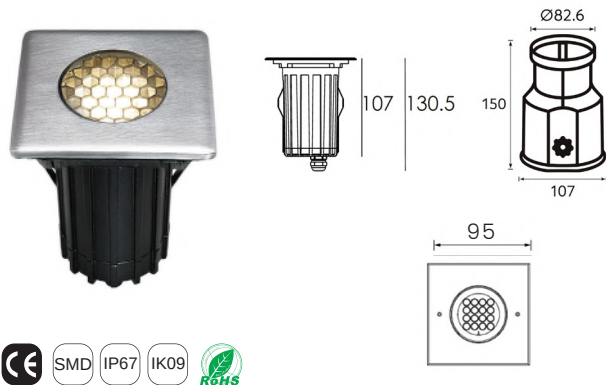


Wattage	Beam Angle
1x4 W	9° 15° 30° 45°
Colors Temperature	Lumen Output
3000k	≈200 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)



Up Light

Inground Recessed

ACU OU 252003H

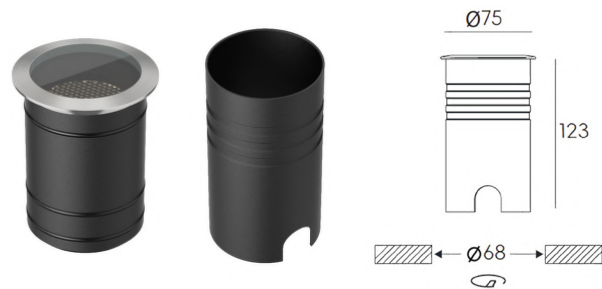

Wattage	Beam Angle
7 W	8° 15° 20° 30° 40°
Colors Temperature	Lumen Output
3000k	≈508 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Materials	Input Voltage
316 Stainless Steel Frame Body: Powder Coated Aluminum	24V DC (Via the External Driver)

ACU OU 182003H



Wattage	Beam Angle
4x2 W	10° 15° 30°
Colors Temperature	Lumen Output
3000k	≈488 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)






Up Light


Inground Recessed

ACU OU 182003SH



Wattage	Beam Angle
4x2 W	10° 15° 30°
Colors Temperature	Lumen Output
3000k	≈488 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)

ACU OU 182004H




Wattage	Beam Angle
16x1.2 W	10° 20° 30°
Colors Temperature	Lumen Output
3000k	≈1155 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)



Up Light


Inground Recessed

ACU OU 182004SH



Wattage	Beam Angle
16x1.2 W	10° 20° 30°
Colors Temperature	Lumen Output
3000k	≈1155 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)

ACU OU 182005H




Wattage	Beam Angle
25x1 W	10° 20° 30°
Colors Temperature	Lumen Output
3000k	≈2249 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)



Up Light

Inground Recessed

ACU OU 182005SH

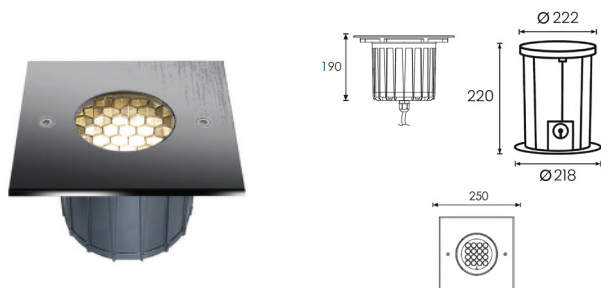


Wattage	Beam Angle
25x1 W	10° 15° 20° 30°
Colors Temperature	Lumen Output
3000k	≈2249 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)

Up Light

Inground Recessed - Adjustable

ACU OU 182006H

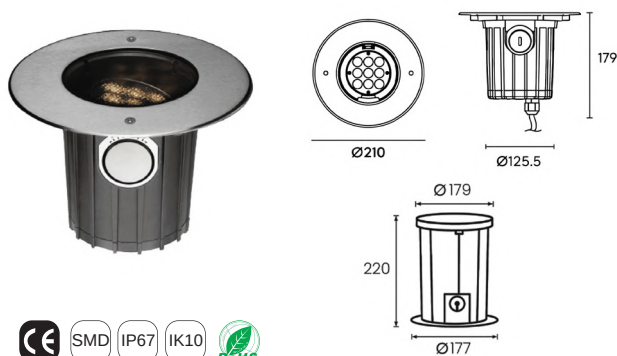

Wattage	Beam Angle
9x1.2 W	15° 30° 50°
Colors Temperature	Lumen Output
3000k	≈756 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)






Up Light


Inground Recessed – Adjustable

ACU OU 182006SH

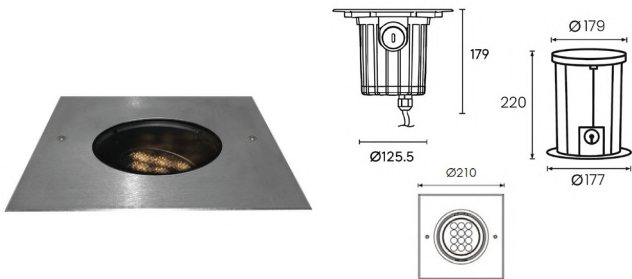

Wattage	Beam Angle
9x1.2 W	15° 30° 50°
Colors Temperature	Lumen Output
3000k	≈756 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)


ACU OU 182007H

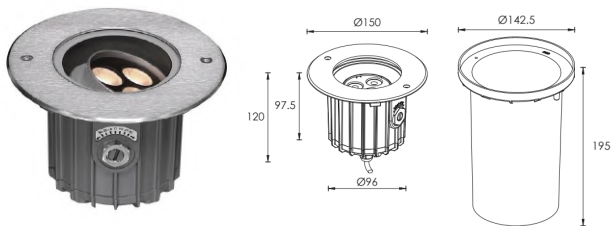



Wattage	Beam Angle
3x2W	9° 15° 20° 30° 45°
Colors Temperature	Lumen Output
3000k	≈282 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)



Wooden Up Light - Inground Recessed

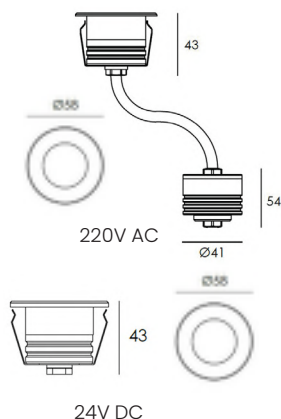

ACU OU 182010H

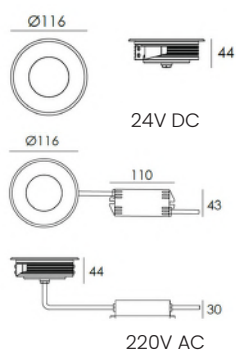207



Up Light

Wooden Up Light – Inground Recessed

ACU OU 182011H




Wattage	Beam Angle
6×2W	9° 20° 30° 60°
Colors Temperature	Lumen Output
3000k	≈ 977 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	24V DC 220V AC

Up Light

Recessed – Adjustable

ACU OU 183003A

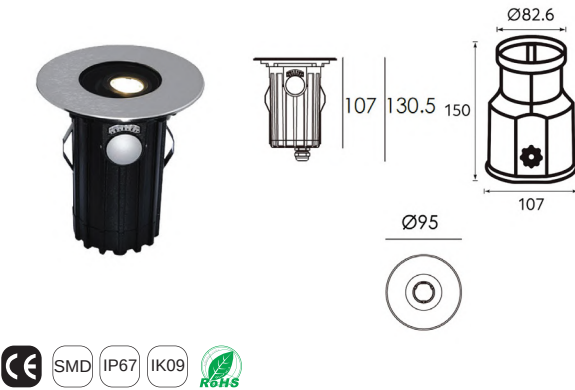


Wattage	Beam Angle
1x2W	10x35° 15x58° 10x60°
Colors Temperature	Lumen Output
3000k	≈112 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)



Up Light


Inground Recessed – Adjustable

ACU OU 183003H

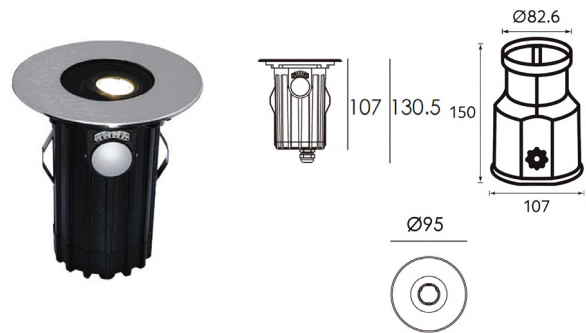

Wattage	Beam Angle
1x2W	15° 30°
Colors Temperature	Lumen Output
3000k	≈112 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)

ACU OU 183003SH

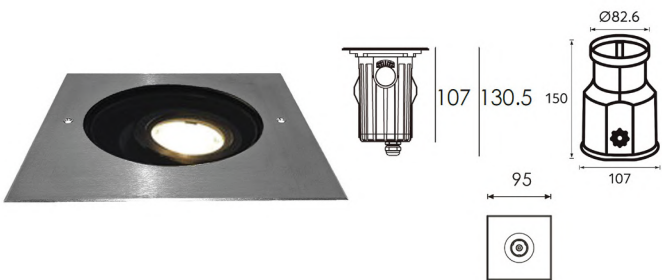


Wattage	Beam Angle
1x2W	15° 30°
Colors Temperature	Lumen Output
3000k	≈112 Lm
Installation	Rated Life Hours
Recessed Inground	30,000 – 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)



Up Light


Inground Recessed - Adjustable

ACU OU 183004H

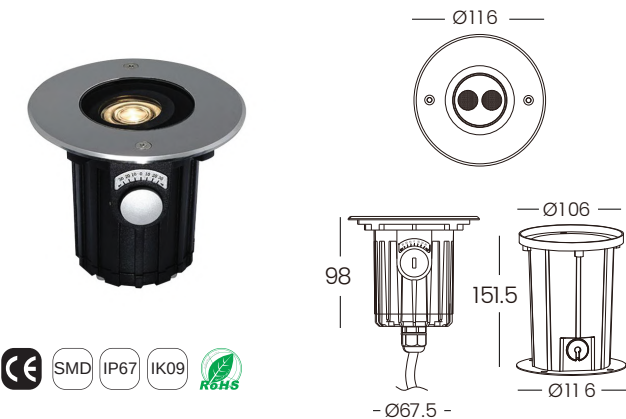

Wattage	Beam Angle
2x1.5 W	9° 15° 20° 30° 50°
Colors Temperature	Lumen Output
3000k	≈190 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)

ACU OU 183004SH

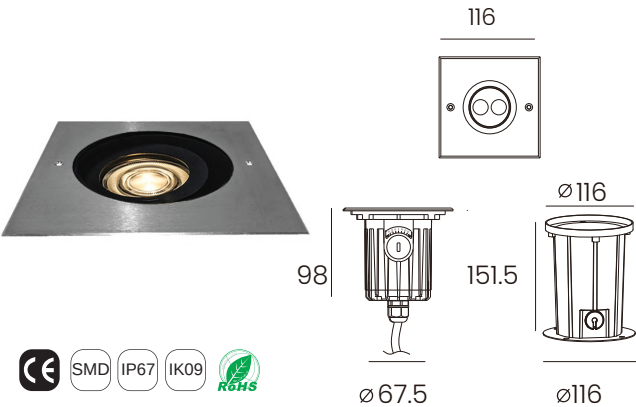


Wattage	Beam Angle
2x1.5 W	9° 15° 20° 30° 50°
Colors Temperature	Lumen Output
3000k	≈190 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)



Up Light


Inground Recessed - Adjustable

ACU OU 183005H

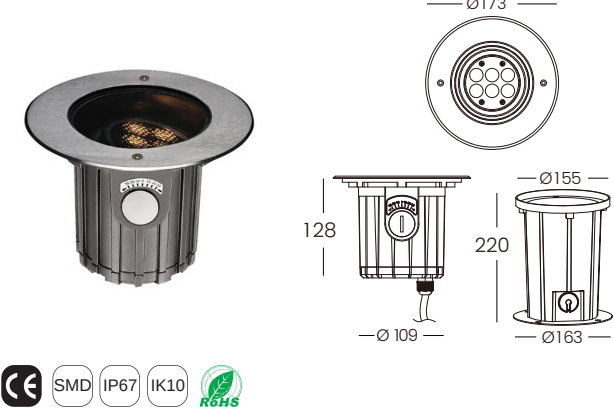

Wattage	Beam Angle
6x1.2 W	15° 30° 50°
Colors Temperature	Lumen Output
3000k	≈ 570 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)

ACU OU 183005SH

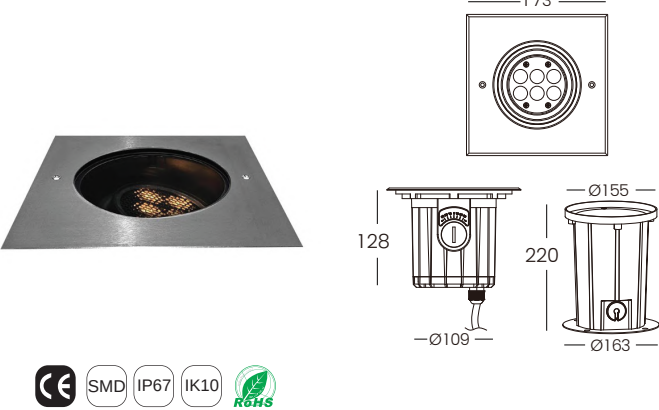


Wattage	Beam Angle
6x1.2 W	15° 30° 50°
Colors Temperature	Lumen Output
3000k	≈570 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)



Up Light


Recessed - Adjustable

ACU OU 183007H

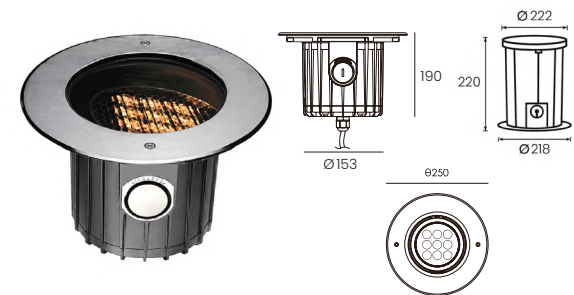

Wattage	Beam Angle
12x1.5 W	13° 25° 30°
Colors Temperature	Lumen Output
3000k	≈1389 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)

ACU OU 183007SH

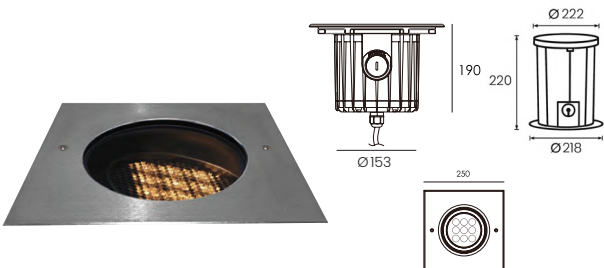


Wattage	Beam Angle
12x1.5 W	13° 25° 30°
Colors Temperature	Lumen Output
3000k	≈1389 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)



Up Light

Recessed – Adjustable


ACU OU 183008H

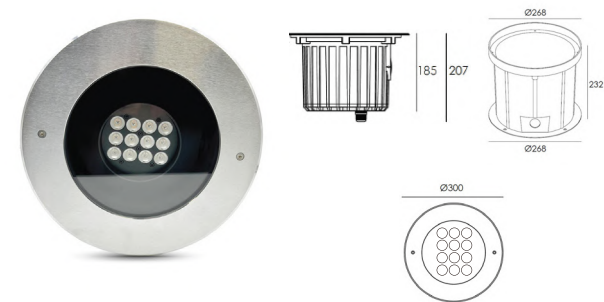

Wattage	Beam Angle
12x2.2 W	13° 25° 30°
Colors Temperature	Lumen Output
3000k	≈2392 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Hard Chrome plated Stainless Steel / Housing: Powder Coated Aluminum	220V AC (Via the Built In Driver)

Window Light

ACU OSM 182069

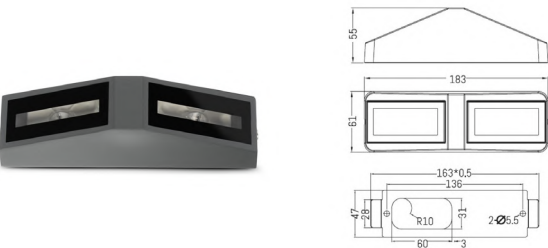

Wattage	Beam Angle
2x3 W	120°
Colors Temperature	Lumen Output
3000k	330Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Chrome Finish
Materials	Input Voltage
Front Cover: Powder Coated Aluminum + Tempered glass	220V AC (Via the Built In Driver)







OUTDOOR LINEAR


C O L L E C T I O N

The Outdoor Linear Series is described as a family of in-ground and surface mounted fixtures used to light architectural elements and wall textures. The catalogue emphasizes its range of wattages and shapes, plus special components that help provide visual comfort.

Outdoor Linear


Inground Recessed

ACU OL 182020H



Wattage	Beam Angle
3x2W	13° 25° 30°
Colors Temperature	Lumen Output
3000k	≈395 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder Coated Aluminum Housing

ACU OL 182020A




Wattage	Beam Angle
3x2 W	Asymmetrical 45° x 35°
Colors Temperature	Lumen Output
3000k	≈344 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder Coated Aluminum Housing



Outdoor Linear


Inground Recessed

ACU OL 182021H



Wattage	Beam Angle
6x2W	13° 25° 30°
Colors Temperature	Lumen Output
3000k	≈960 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing

ACU OL 182021A




Wattage	Beam Angle
6x2W	Asymmetrical 45° x 35°
Colors Temperature	Lumen Output
3000k	≈823 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing



Outdoor Linear


Inground Recessed

ACU OL 182022H

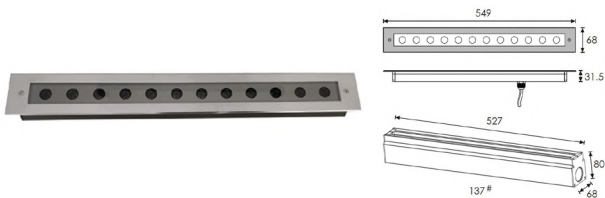

Wattage	Beam Angle
12x1.5W	20° 30° 45°
Colors Temperature	Lumen Output
3000k	≈1020 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Drive)	Stainless Steel Cover with Powder, Coated Aluminum Housing

ACU OL 182022A

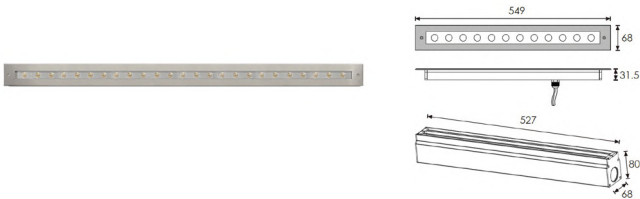


Wattage	Beam Angle
12x1.5W	Asymmetrical 45° x 35°
Colors Temperature	Lumen Output
3000k	≈1020 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing



Outdoor Linear

Inground Recessed

ACU OL 182023H

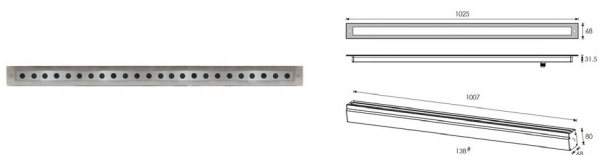

Wattage	Beam Angle
24x1.5W	8° 20° 35° 45°
Colors Temperature	Lumen Output
3000k	≈2055 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing

ACU OL 182023A



Wattage	Beam Angle
24x1.5W	Asymmetrical 45° x 35°
Colors Temperature	Lumen Output
3000k	≈2114 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing






Outdoor Linear


Adjustable Surface Mounted

ACU OL 182024H



Wattage	Beam Angle
6x1W	15° 20° 30° 50°
Colors Temperature	Lumen Output
3000k	≈400 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Dark Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing.

ACU OL 182025H




Wattage	Beam Angle
12x1W	15° 20° 30° 50°
Colors Temperature	Lumen Output
3000k	≈926 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Dark Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing.



Outdoor Linear

Adjustable Surface Mounted

ACU OL 182026H




Wattage	Beam Angle
24x1W	15° 20° 30° 50°
Colors Temperature	Lumen Output
3000k	≈1850 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Dark Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing.

Outdoor Linear

Inground Recessed

ACU OL 182080H




Wattage	Beam Angle
18W	20° 30° 45°
Colors Temperature	Lumen Output
3000k	≈1050 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing.



Outdoor Linear


Inground Recessed

ACU OL 182081H



Wattage	Beam Angle
9W	8° 20° 25° 30° 35° 45°
Colors Temperature	Lumen Output
3000k	≈510 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing.

ACU OL 182082H



Wattage	Beam Angle
9W	8° 20° 25° 30° 35° 45°
Colors Temperature	Lumen Output
3000k	≈520 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing.






Outdoor Linear


Inground Recessed

ACU INL 10-3K220V-IK10-1m



Wattage	Beam Angle
10W	120°
Colors Temperature	Lumen Output
3000k	≈900 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥80	■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Aluminum with Tempered Glass

ACU INL 10-3K24V-IK10-1m




Wattage	Beam Angle
10W	120°
Colors Temperature	Lumen Output
3000k	≈900 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥80	■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Aluminum with Tempered Glass



Outdoor Linear


Inground Recessed

ACU INL 14-3K220V-IK10-1m



Wattage	Beam Angle
14W	120°
Colors Temperature	Lumen Output
3000k	≈1260 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥80	■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Aluminum with Tempered Glass

ACU INL 14-3K24V-IK10-1m



Wattage	Beam Angle
14W	120°
Colors Temperature	Lumen Output
3000k	≈1260 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥80	■ Grey
Input Voltage	Materials
24V DC (Via the External Driver)	Aluminum with Tempered Glass





DRIVE-OVER

COLLECTION


Drive Over Is Described As An Outdoor Guide-Light Family Designed For Pathways. The Catalogue Emphasizes Sleek Functionality And Ik10-Rated Durability For High Traffic Environments.

Drive Over

Inground Recessed

ACU OU 182012


One Way

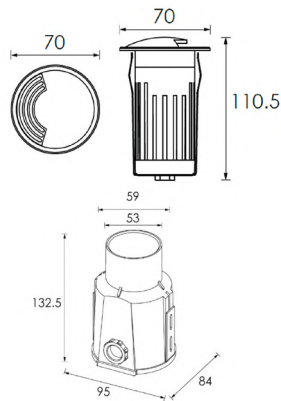

Wattage	Beam Angle
1x2W	120°
Colors Temperature	Lumen Output
3000k	≈13Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (with the Attached Built in Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing.

ACU OU 182013

Two Way

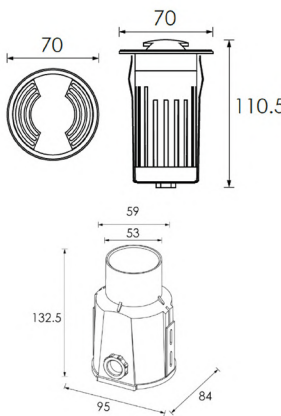

Wattage	Beam Angle
1x2W	100°
Colors Temperature	Lumen Output
3000k	≈10 Lm
Installation	Rated Life Hours
Inground Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome Finish
Input Voltage	Materials
220V AC (with the Attached Built in Driver)	Stainless Steel Cover with Powder, Coated Aluminum Housing.





Drive Over

Inground Recessed

ACU OU 182014


Four Way



SMD

IP67

IK10

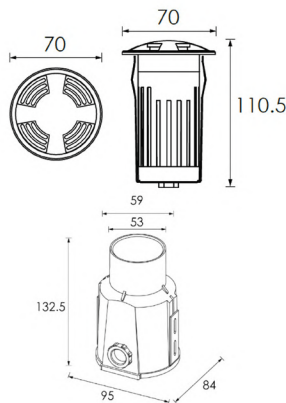

Wattage

1x2W

Beam Angle

45°

Colors Temperature

3000k

Lumen Output

≈8.5Lm

Installation

Inground Recessed

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Chrome Finish

Input Voltage

220V AC
(with the Attached Built in Driver)

Materials

Stainless Steel Cover
with Powder, Coated
Aluminum Housing.



STAIR LIGHT


C O L L E C T I O N

Stair Light is an outdoor family for low level architectural guidance and step illumination. It contains both recessed and wall-mounted executions inside the merged family, all designed for durable exterior use.

Stairlight


fixed - Recessed

ACU OSR 182036

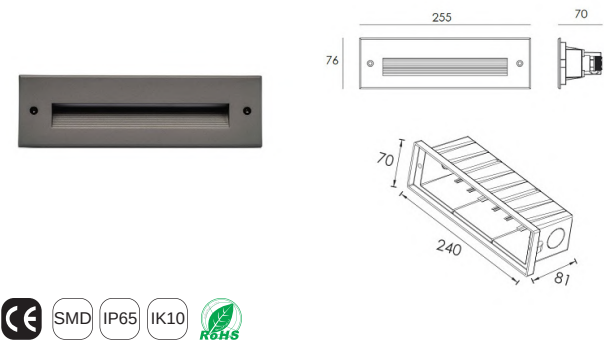

Wattage	Beam Angle
15x0.2W	120°
Colors Temperature	Lumen Output
3000k	≈104 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (via the Built in Driver)	Powder Coated Aluminum

ACU OSR 182037

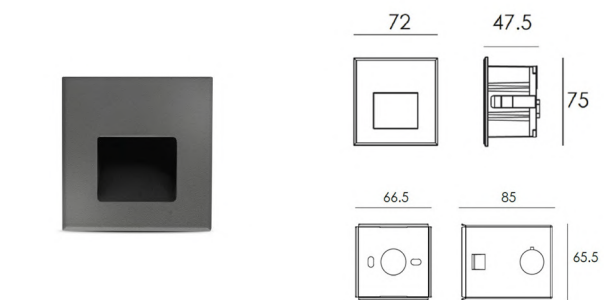

Wattage	Beam Angle
3x0.7W	120°
Colors Temperature	Lumen Output
3000k	≈36 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (via the Built in Driver)	Powder Coated Aluminum






Stairlight


fixed - Recessed

ACU OSR 182038



Wattage	Beam Angle
18x0.2W	120°
Colors Temperature	Lumen Output
3000k	≈85 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU OSR 182039




Wattage	Beam Angle
1x1W	32°
Colors Temperature	Lumen Output
3000k	≈23 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Stairlight


fixed - Recessed

ACU OSR 182040

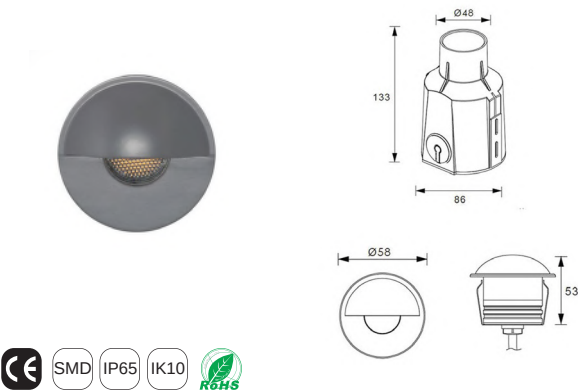

Wattage	Beam Angle
1x2W	22°
Colors Temperature	Lumen Output
3000k	≈51 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

ACU OSR 182041

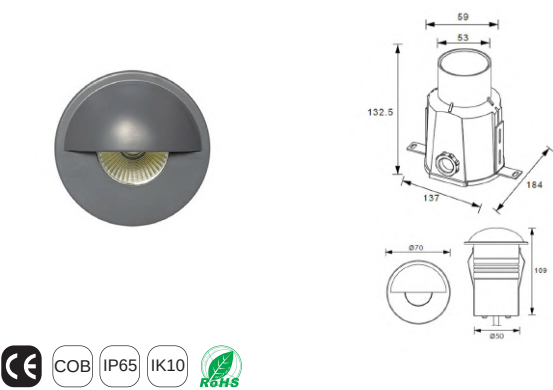

Wattage	Beam Angle
1x5W	18° 24° 32°
Colors Temperature	Lumen Output
3000k	≈208 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Stairlight


fixed - Recessed

ACU OSR 216001

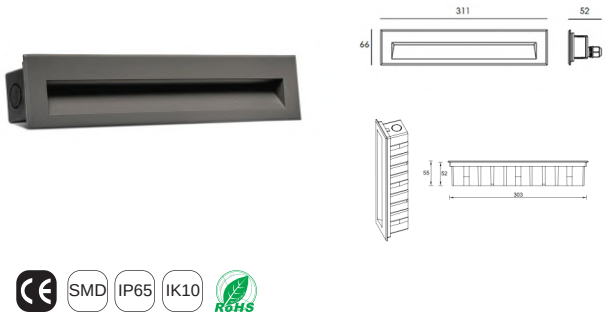

Wattage	Beam Angle
30x0.3W	120°
Colors Temperature	Lumen Output
3000k	≈320 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☒ Black ☐ White ☒ Grey
Input Voltage	Materials
220V AC (Via the Built In Drive)	Powder Coated Aluminum

ACU OSR 216002

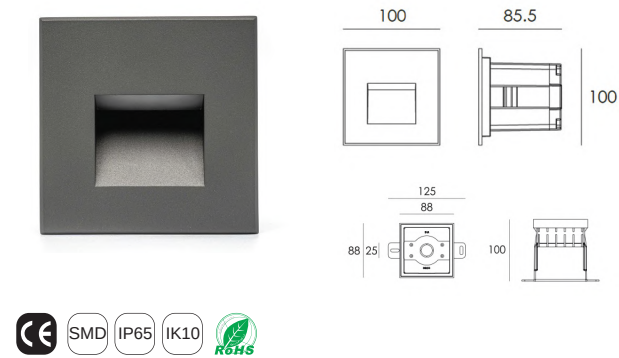


Wattage	Beam Angle
10x0.5W	120°
Colors Temperature	Lumen Output
3000k	≈112 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☒ Black ☐ White ☒ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Stairlight

Fixed - Recessed

ACU OSR 216003R




Wattage	Beam Angle
9x0.5	77°x35°
Colors Temperature	Lumen Output
3000k	≈ 94 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	☒ Black ☐ White ☒ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

Stairlight

Wall Mounted - Fixed

ACU OSM 216003S



Wattage	Beam Angle
9x0.5W	77°x35°
Colors Temperature	Lumen Output
3000k	≈ 158 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	☒ Black ☐ White ☒ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum






Stairlight

fixed - Recessed

ACU OSR 216004




Wattage	Beam Angle
1x1W	80°
Colors Temperature	Lumen Output
3000k	≈46 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Stainless Steel SUS 316L

Stairlight

Wall Mounted - Fixed

ACU OSR 216005



Wattage	Beam Angle
12x0.5W	120°
Colors Temperature	Lumen Output
3000k	≈120Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum





WALL LIGHT


COLLECTION

Wall Light Is described as a stylish and modern outdoor lighting solution that creates an inviting and comfortable atmosphere while Enhancing the beauty of façades and entrances. It is weather resistant and suitable for pathways, balconies, and doorways.

Wall Light


Fixed -Wall Mounted

ACU OW 182042



Wattage	Beam Angle
1x6W	10°
Colors Temperature	Lumen Output
3000k	≈444 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU OW 182042




Wattage	Beam Angle
1x12W	15° 25°
Colors Temperature	Lumen Output
3000k	≈1432 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Wall Light


Fixed -Wall Mounted

ACU OW 182043

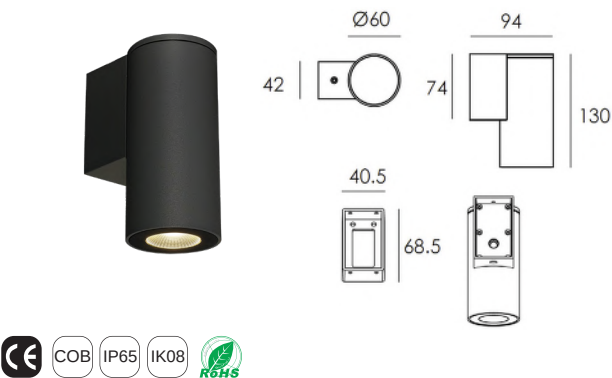

Wattage	Beam Angle
1x4.5W	15° 24° 38°
Colors Temperature	Lumen Output
3000k	≈282Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU OW 182044

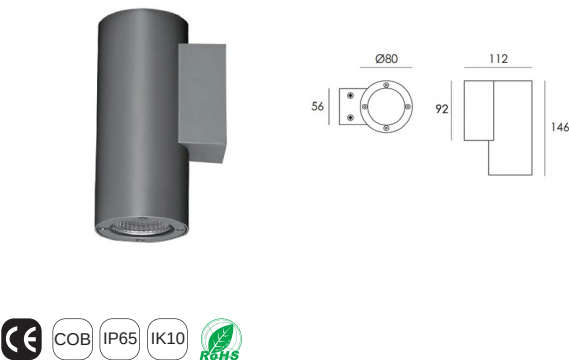

Wattage	Beam Angle
1x10W	15° 24° 38° 60°
Colors Temperature	Lumen Output
3000k	≈1170 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum






Wall Light


Fixed -Wall Mounted

ACU OW 182045



Wattage	Beam Angle
1x18W	12° 38° 55°
Colors Temperature	Lumen Output
3000k	≈1847Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU OW 182046




Wattage	Beam Angle
1x25W	10° 22° 38°
Colors Temperature	Lumen Output
3000k	≈2967 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Wall Light

Fixed -Wall Mounted

ACU OW 182047



Wattage

2x4.5W

Beam Angle

15° 24° 38°

Colors Temperature

3000k

Lumen Output

≈2x282 Lm

Installation

Wall Mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White
■ Grey


Input Voltage

220V AC
(Via the Built In Driver)

Materials

Powder Coated
Aluminum

ACU OW 182048



Wattage

2x8W

Beam Angle

15° 24° 38° 60°

Colors Temperature

3000k

Lumen Output

≈2x986 Lm

Installation

Wall Mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White
■ Grey

Input Voltage

220V AC
(Via the Built In Driver)

Materials


Powder Coated
Aluminum



Wall Light


Fixed -Wall Mounted

ACU OW 182049

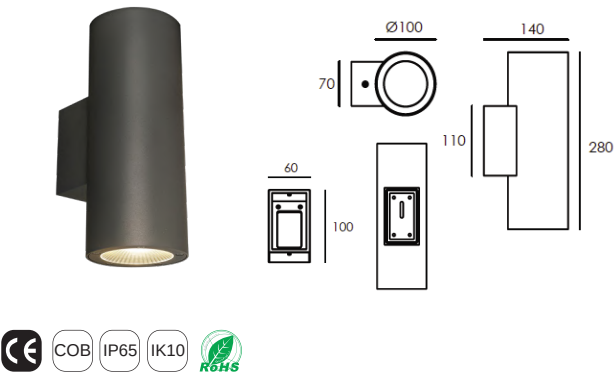

Wattage	Beam Angle
2X12W	12° 15° 18° 32° 38°
Colors Temperature	Lumen Output
3000k	≈2x1079 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU OW 182050

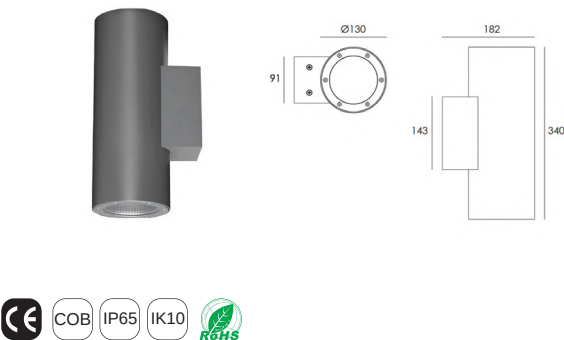


Wattage	Beam Angle
2x18W	10° 22° 38°
Colors Temperature	Lumen Output
3000k	≈2x2036 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Wall Light

Fixed -Wall Mounted

ACU OW 182051



Wattage

1x6W

Beam Angle

18° 25° 40°

Colors Temperature

3000k

Lumen Output

≈651 Lm

Installation

Wall Mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White
■ Grey



Input Voltage

220V AC
(Via the Built In Driver)

Materials

Powder Coated
Aluminum

ACU OW 182051N



Wattage

1x3W

Beam Angle

10°

Colors Temperature

3000k

Lumen Output

≈68 Lm

Installation

Wall Mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White
■ Grey

Input Voltage

220V AC
(Via the Built In Driver)

Materials

Powder Coated
Aluminum






Wall Light


Fixed -Wall Mounted

ACU OW 182052



Wattage	Beam Angle
2x6W	18° 25° 40°
Colors Temperature	Lumen Output
3000k	≈2x651 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU OW 182052N




Wattage	Beam Angle
2x3W	10°
Colors Temperature	Lumen Output
3000k	≈2x651 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Wall Light

Fixed -Wall Mounted

ACU OW 182052NWH



Wattage

2x3W

Beam Angle

10° & 120°

Colors Temperature

3000k

Lumen Output

≈ 98 Lm & 195 Lm

Installation

Wall Mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White
■ Grey


Input Voltage

220V AC
(Via the Built In Driver)

Materials

Powder Coated
Aluminum

ACU OW 211101



Wattage

3.4W

Beam Angle

45°

Colors Temperature

3000k

Lumen Output

≈300 Lm

Installation

Wall Mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White
■ Grey

Input Voltage

220V AC
(Via the Built In Driver)

Materials


Powder Coated
Aluminum



Wall Light

Fixed -Wall Mounted

ACU OW 211102



Wattage

2x3.4W

Beam Angle

45°

Colors Temperature

3000k

Lumen Output

≈2x300 Lm

Installation

Wall Mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White
■ Grey


Input Voltage

220V AC
(Via the Built In Driver)

Materials

Powder Coated
Aluminum

ACU OW 217001



Wattage

1x10 W

Beam Angle

6°

Colors Temperature

3000k

Lumen Output

≈350 Lm

Installation

Wall Mounted

Rated Life Hours

30,000 - 50,000H

CRI

≥90

Colors

■ Black □ White
■ Grey

Input Voltage

220V AC
(Via the Built In Driver)

Materials

Powder Coated
Aluminum






Wall Light


Fixed -Wall Mounted

ACU OW 217002

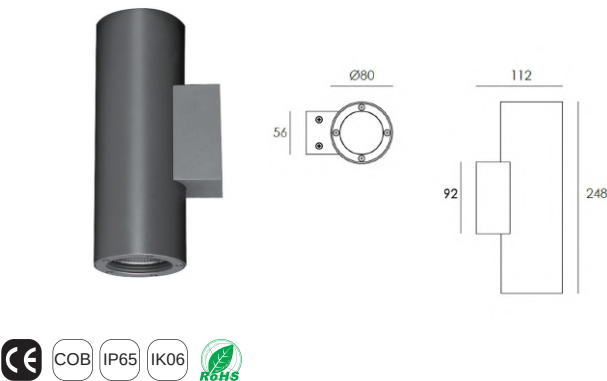

Wattage	Beam Angle
2x8 W	6°
Colors Temperature	Lumen Output
3000k	≈2x297 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU OW 221001

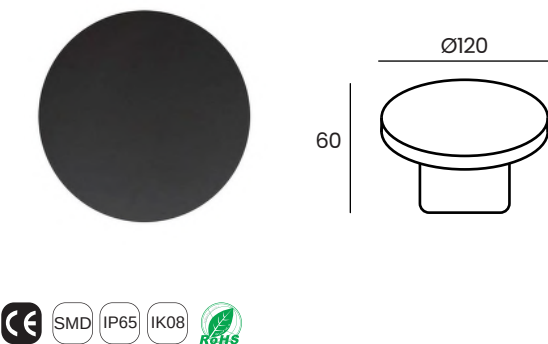


Wattage	Beam Angle
5 W	360°
Colors Temperature	Lumen Output
3000k	≈450 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

Wall Light


Fixed -Wall Mounted

ACU OW 221001S



Wattage	Beam Angle
5 W	360°
Colors Temperature	Lumen Output
3000k	≈450 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU OW 221002





Wattage	Beam Angle
8 W	360°
Colors Temperature	Lumen Output
3000k	≈750 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Wall Light


Fixed -Wall Mounted

ACU OW 221002S



Wattage	Beam Angle
8 W	360°
Colors Temperature	Lumen Output
3000k	≈750 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU OW 221003





Wattage	Beam Angle
10 W	360°
Colors Temperature	Lumen Output
3000k	≈950 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Wall Light

Fixed -Wall Mounted

ACU OW 221003S



Wattage	Beam Angle
12 W	360°
Colors Temperature	Lumen Output
3000k	≈1100 Lm
Installation	Rated Life Hours
Wall Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Black □ White ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Downlight


C e i l i n g - S e l e x

Selex is an outdoor ultra-thin downlight family designed to be practical, weatherproof, and easy to install. The catalogue highlights its anti-glare system for improved visual comfort.

Ceiling

Fixed – Outdoor Downlight – Surface Mounted


ACU OSM 208101



Wattage	Beam Angle
15W	15° 24° 36° 60°
Colors Temperature	Lumen Output
3000k	1271 Lm
Installation	Rated Life Hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Built In Driver)	Podwer Coated Aluminum

Fixed – Outdoor Downlight – Recessed


ACU OD 255001



Wattage	Beam Angle
7W	15° 24° 36° 50°
Colors Temperature	Lumen Output
3000k	700 Lm
Installation	Rated Life Hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Black □ White
Input Voltage	Materials
220V AC (Via the Attached External Driver)	Podwer Coated Aluminum




ACU OD 255002



Wattage	Beam Angle
10W	15° 24° 36° 50°
Colors Temperature	Lumen Output
3000k	1000 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Attached External Driver)	Podwer Coated Aluminum


ACU OD 255003



Wattage	Beam Angle
15W	15° 24° 36° 50°
Colors Temperature	Lumen Output
3000k	1500 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Attached External Driver)	Podwer Coated Aluminum



ACU OD 255004



Wattage	Beam Angle
20W	15° 24° 36° 50°
Colors Temperature	Lumen Output
3000k	2000 Lm
Installation	Rated Life Hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V AC (Via the Attached External Driver)	Podwer Coated Aluminum





NEON FLEX

COLLECTION

Outdoor strip lighting offers a sleek, modern solution for indirect illumination. It is easy to install, energy efficient, and designed to enhance any exterior space with subtle, continuous lighting.

LORENA


Side Bend

Lorena is the outdoor side-bend neon-flex family. It is a sleek, modern solution for indirect illumination, designed to enhance exterior spaces with subtle, continuous light.

Neon Flex Lorena


Side Bend – Flexible – Surface Mounted

ACU S.NF 262001

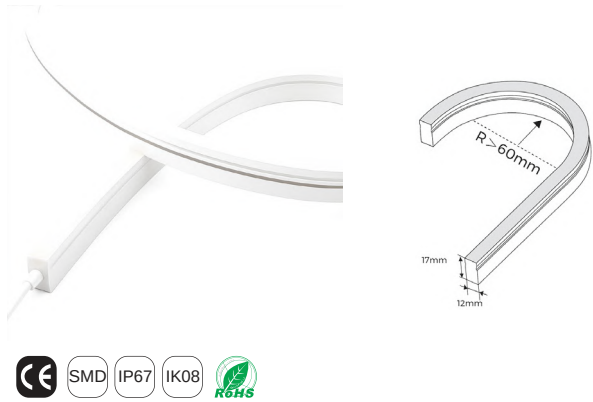

Wattage	CRI
5 W/m	≥90
Colors Temperature	Lumen Output
3000k	300 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor-specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 12mm x H 17mm

ACU S.NF 262002

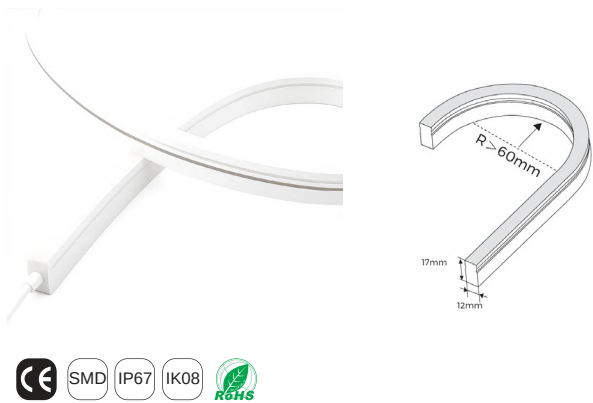


Wattage	CRI
10 W/m	≥90
Colors Temperature	Lumen Output
3000k	538 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor-specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 12mm x H 17mm



Neon Flex Lorena


Side Bend – Flexible – Surface Mounted

ACU S.NF 262003

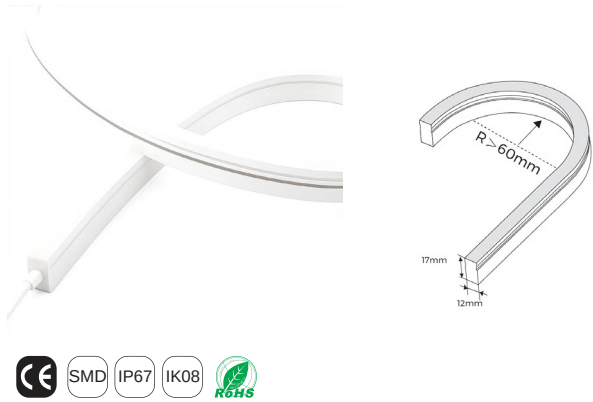

Wattage	CRI
15 W/m	≥90
Colors Temperature	Lumen Output
3000k	648 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor-specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 12mm x H 17mm

ACU S.NF 262101-RGB

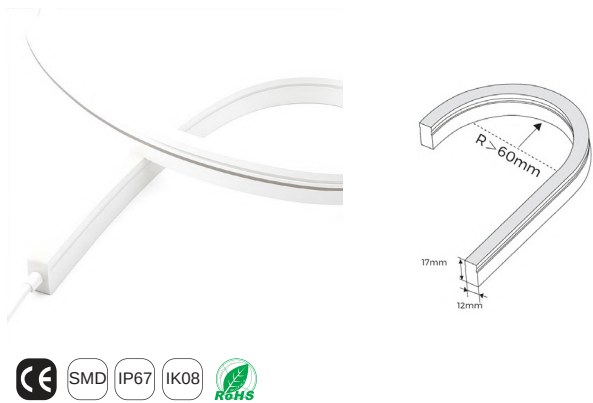


Wattage	CRI
12 W/m	≥90
Colors Temperature	Lumen Output
RGB	-
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 12mm x H 17mm



Neon Flex Lorena

Side Bend – Flexible – Surface Mounted

ACU S.NF 262201-RGBW

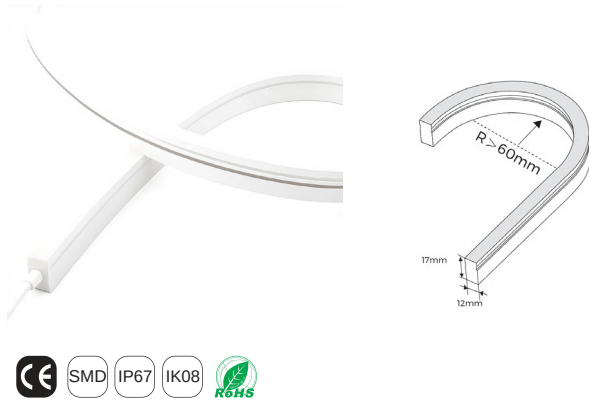


Wattage	CRI
12 W/m	≥90
Colors Temperature	Lumen Output
RGBW 3000K	122 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor-specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 12mm x H 17mm

Neon Flex Lorena

Side Bend – Flexible – Surface Mounted – Tunable White

ACU S.NF 262301-TW

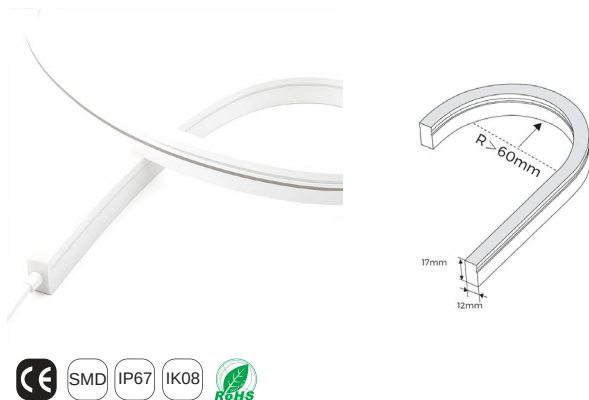


Wattage	CRI
13 W/m	≥90
Colors Temperature	Lumen Output
Tunable 2200K-6000K	-
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor-specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 12mm x H 17mm



Neon Flex Lorena


Side Bend – Flexible – Surface Mounted

ACU S.NF 262401

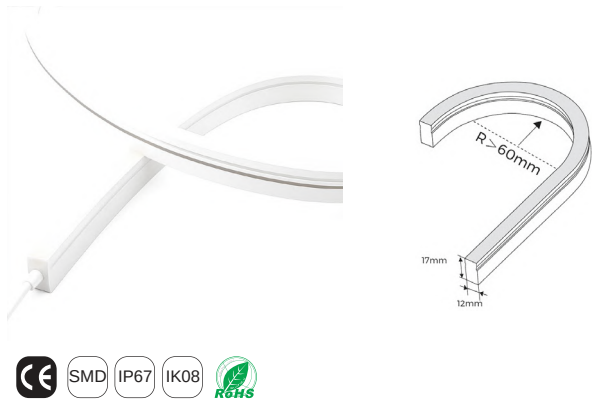

Wattage	CRI
4.4 W/m	≥90
Colors Temperature	Lumen Output
3000 k	230 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor-specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
48V DC (Via the External Driver)	W 12mm x H 17mm

ACU S.NF 262402

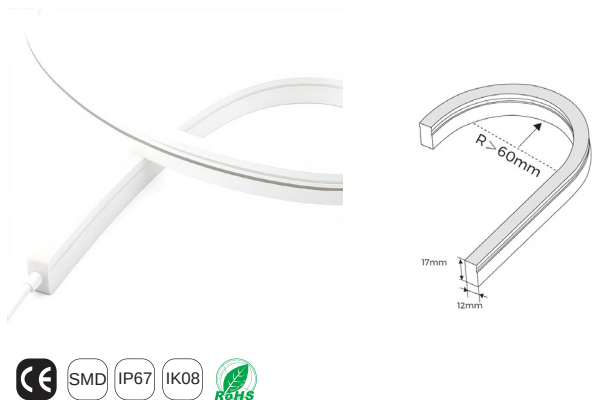


Wattage	CRI
10 W/m	≥90
Colors Temperature	Lumen Output
3000 k	530 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor-specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
48V DC (Via the External Driver)	W 12mm x H 17mm



Neon Flex Lorena


Side Bend – Flexible – Surface Mounted

ACU S.NF 263001

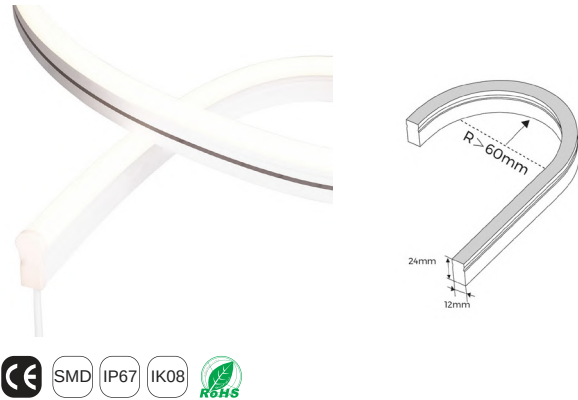

Wattage	CRI
5 W/m	≥90
Colors Temperature	Lumen Output
3000 k	300 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor-specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 12mm x H 24mm

ACU S.NF 263002

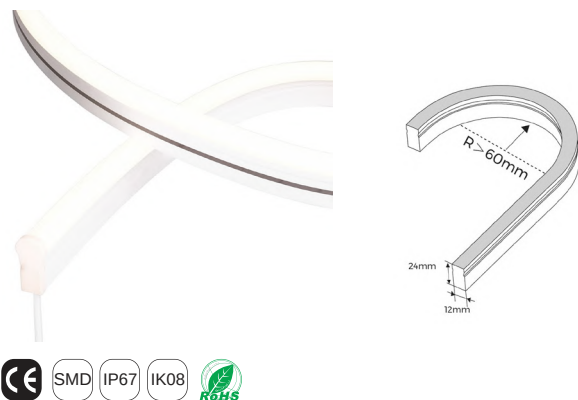


Wattage	CRI
10 W/m	≥90
Colors Temperature	Lumen Output
3000 k	622 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 12mm x H 24mm



Neon Flex Lorena

Side Bend – Flexible – Surface Mounted

ACU S.NF 263101-RGB

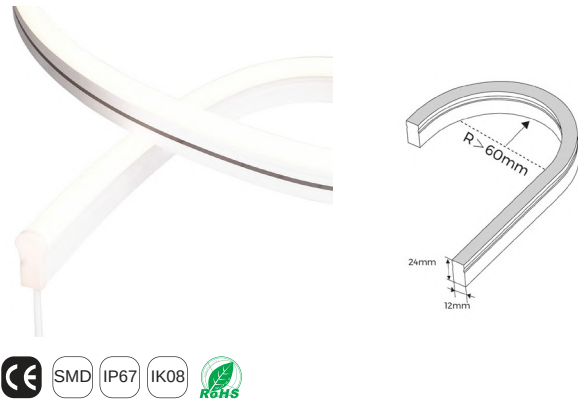

Wattage	CRI
12 W/m	≥90

Colors Temperature	Lumen Output
RGB	-

Installation

Neon Flex Accessories (Profile & Clips)


Materials

Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process

Input Voltage	Dimensions
24V DC (Via the External Driver)	W 12mm x H 24mm

Ultra Slim

ACU S.NF 202401

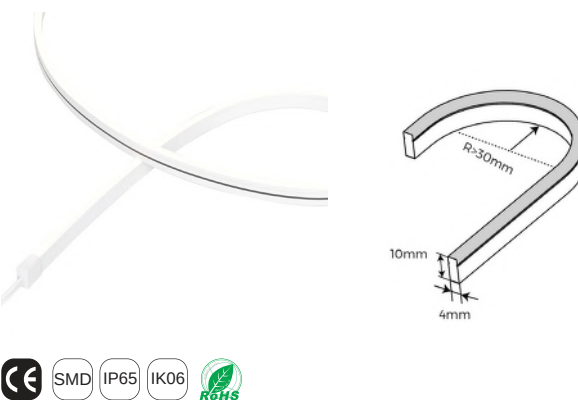

Wattage	CRI
7.2 W/m	≥90

Colors Temperature	Lumen Output
3000 k	240 Lm/m

Installation

Neon Flex Accessories (Profile & Clips)

Materials

Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process

Input Voltage	Dimensions
24V DC (Via the External Driver)	W 4mm x H 10mm




Neon Flex Lorena

Ultra Slim

Side Bend – Flexible – Surface Mounted

ACU S.NF 202402-TW



Wattage	CRI
7.9 W/m	≥90

Colors Temperature	Lumen Output
Tunable 2300K-4000k	220 Lm/m

Installation

Neon Flex Accessories (Profile & Clips)


Materials

Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process

Input Voltage	Dimensions
24V DC (Via the External Driver)	W 4mm x H 10mm

Slim

ACU S.NF 202501



Wattage	CRI
5.3 W/m	≥90

Colors Temperature	Lumen Output
3000 k	170 Lm/m

Installation

Neon Flex Accessories (Profile & Clips)

Materials


Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process

Input Voltage	Dimensions
48V DC (Via the External Driver)	W 6mm x H 12mm



Side Bend – Flexible – Surface Mounted

ACU S.NF 202502

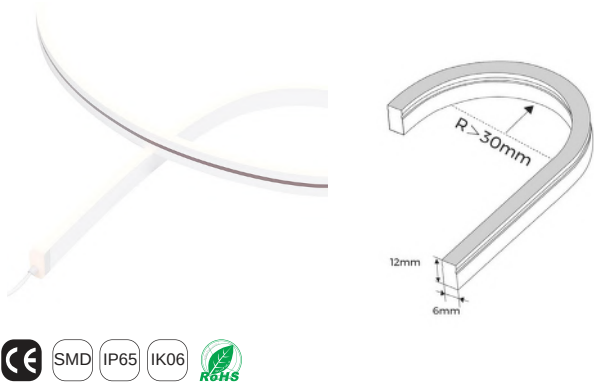

Wattage	CRI
9.6 W/m	≥90
Colors Temperature	Lumen Output
3000 k	280 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 6mm x H 12mm







LARENA


Top Bend

Larena is the outdoor top-bend neon-flex family. It carries the same continuous indirect lighting logic as Lorena, but in a top-bend profile suited for different routing and shaping requirements.

Neon Flex Larena

Top Bend - Flexible - Surface Mounted

ACU T.NF 262501

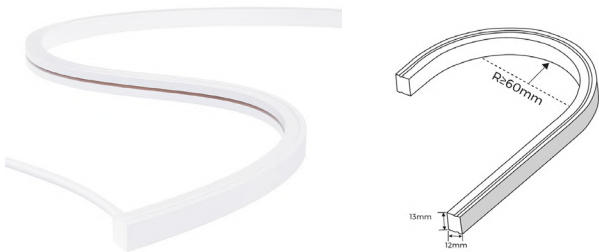

Wattage	CRI
5 W/m	≥90


Colors Temperature	Lumen Output
3000k	390 Lm/m

Installation
Neon Flex Accessories (Profile & Clips)

Materials
Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process

Input Voltage	Dimensions
24V DC (Via the External Driver)	W 13mm x H 12mm

ACU T.NF 262502

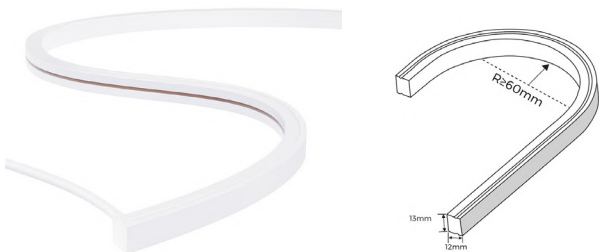

Wattage	CRI
10 W/m	≥90

Colors Temperature	Lumen Output
3000k	750 Lm/m

Installation
Neon Flex Accessories (Profile & Clips)

Materials
Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process


Input Voltage	Dimensions
24V DC (Via the External Driver)	W 13mm x H 12mm



Neon Flex Larena


Top Bend - Flexible - Surface Mounted

ACU T.NF 262503

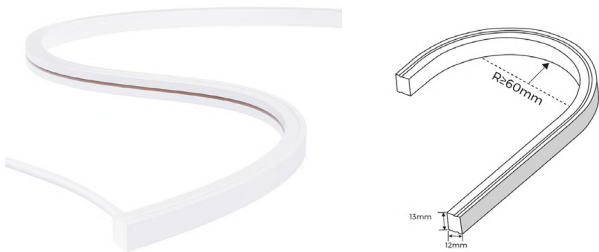

Wattage	CRI
15 W/m	≥90
Colors Temperature	Lumen Output
3000k	909 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 13mm x H 12mm

ACU T.NF 262601-RGB

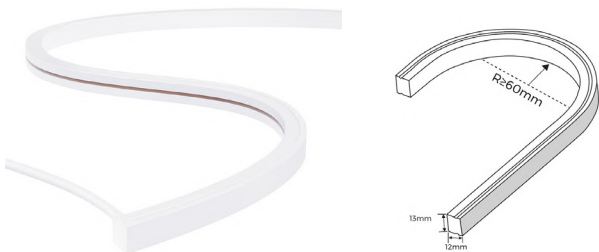


Wattage	CRI
12 W/m	≥90
Colors Temperature	Lumen Output
RGB	-
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 13mm x H 12mm



Neon Flex Larena

Top Bend - Flexible - Surface Mounted

ACU T.NF 262701-RGBW

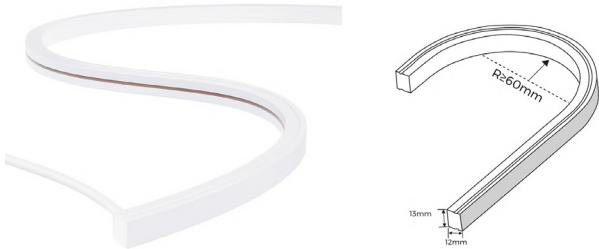

Wattage	CRI
12 W/m	≥90

Colors Temperature	Lumen Output
RGB-3000k	160 Lm/m

Installation


Neon Flex Accessories (Profile & Clips)

Materials

Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process

Input Voltage	Dimensions
24V DC (Via the External Driver)	W 13mm x H 12mm

ACU T.NF 262801-TW

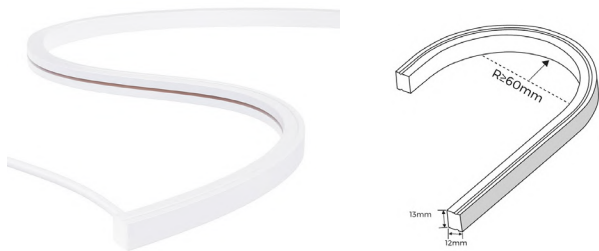

Wattage	CRI
13 W/m	≥90

Colors Temperature	Lumen Output
Tunable 2200k - 6000k	-

Installation

Neon Flex Accessories (Profile & Clips)

Materials

Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process


Input Voltage	Dimensions
24V DC (Via the External Driver)	W 13mm x H 12mm



Neon Flex Larena


Top Bend - Flexible - Surface Mounted

ACU T.NF 262901

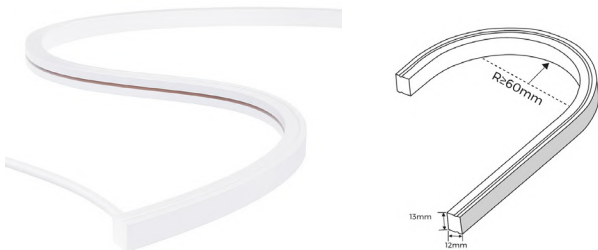

Wattage	CRI
4.4 W/m	≥90
Colors Temperature	Lumen Output
3000k	330 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
48V DC (Via the External Driver)	W 13mm x H 12mm

ACU T.NF 262902

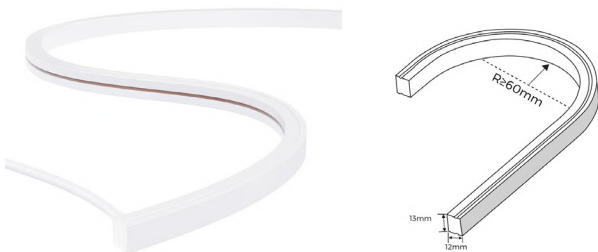


Wattage	CRI
10 W/m	≥90
Colors Temperature	Lumen Output
3000k	660 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
48V DC (Via the External Driver)	W 13mm x H 12mm



Neon Flex Larena


Top Bend - Flexible - Surface Mounted

ACU T.NF 263001

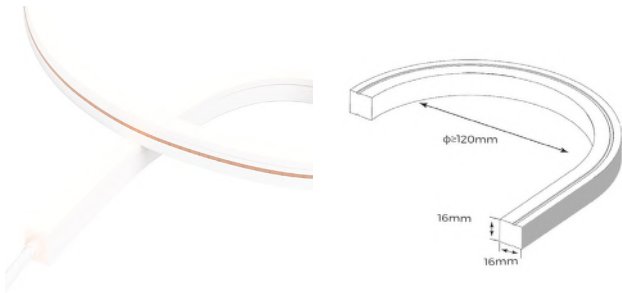

Wattage	CRI
5 W/m	≥ 90
Colors Temperature	Lumen Output
3000k	320 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 16mm x H 16mm

ACU T.NF 263002

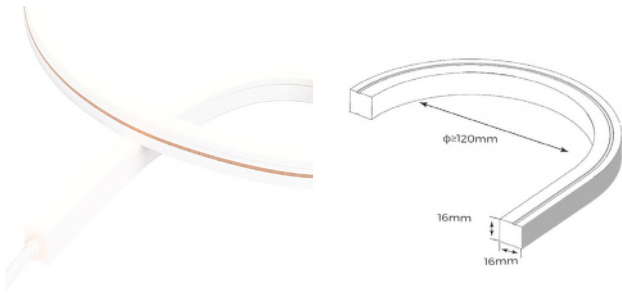


Wattage	CRI
10 W/m	≥ 90
Colors Temperature	Lumen Output
3000k	653 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 16mm x H 16mm



Neon Flex Larena

Top Bend - Flexible - Surface Mounted

ACU T.NF 263101-RGB

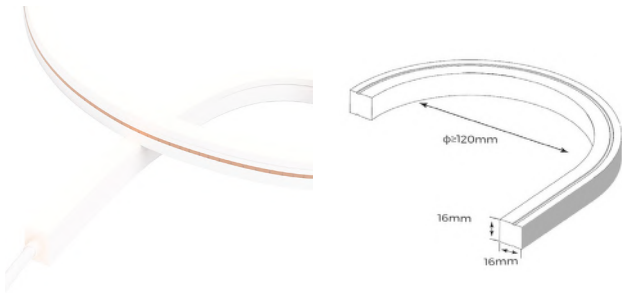

Wattage	CRI
12 W/m	≥90
Colors Temperature	Lumen Output
RGB	-
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Adopting dedicated and outdoor specific LED Integrated with anti-tension silicone extrusion process	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 16mm x H 16mm






3D Neon Flex

3d Neon Flex is a highly expressive, multi-directional lighting solution within the outdoor range. Positioned after Lorena and Larena, it features a dedicated three-Colors silicone extrusion, enabling fluid design possibilities and enhanced visual depth.

3d Neon Flex


Flexible – Surface Mounted

ACU 3DN 263501

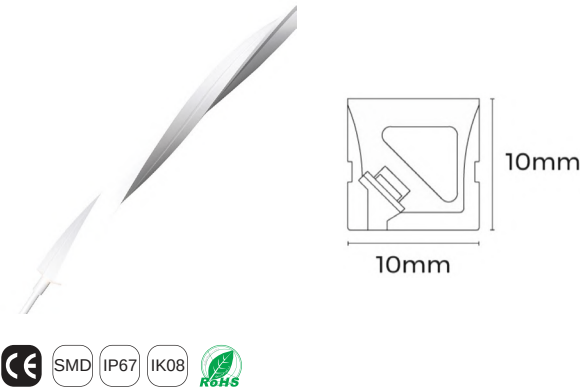

Wattage	CRI
8 W/m	≥90
Colors Temperature	Lumen Output
3000k	320 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Three Colors Silicon Extrusion Technique	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 10mm x H 10mm

ACU 3DN 263601

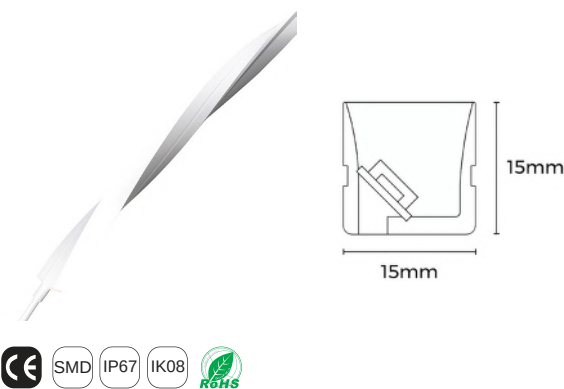


Wattage	CRI
7.2 W/m	≥90
Colors Temperature	Lumen Output
3000k	440 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Three Colors Silicon Extrusion Technique	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 15mm x H 15mm



3d Neon Flex

Flexible – Surface Mounted

ACU 3DN 263602

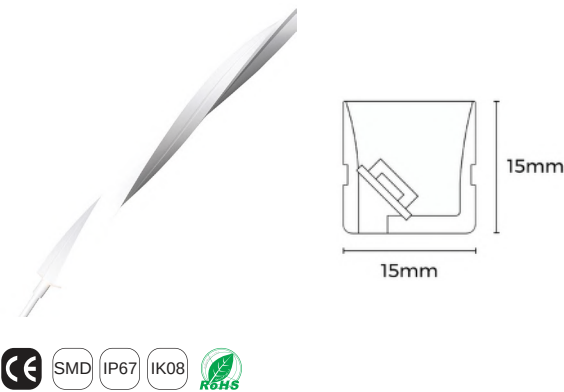

Wattage	CRI
12 W/m	≥90
Colors Temperature	Lumen Output
3000k	820 Lm/m
Installation	
Neon Flex Accessories (Profile & Clips)	
Materials	
Three Colors Silicon Extrusion Technique	
Input Voltage	Dimensions
24V DC (Via the External Driver)	W 15mm x H 15mm







PROJECTOR

C O L L E C T I O N

The Projector Family Is Described In The Catalogue As Durable Outdoor Spotlights For Gardens, Trees, And Plants. Sylune Is One Of The Two Locked Projector Branches Within Your Outdoor Structure.



SYLUNE


Durable outdoor spotlight designed for gardens, trees, and planting areas. Featuring an adjustable head and a weatherproof IP65 design, it offers versatile installation with both ground spike and surface-mounted options.

66

Projector Sylune

Adjustable, Surface Mounted

ACU OP 252501M

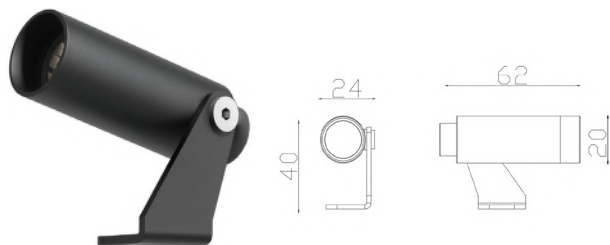


Wattage	Beam angle
2.5 W	20° 40°
Colors Temperature	Lumen Output
3000k	90 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum

Projector Sylune

Adjustable, Planted

ACU OP 252501S

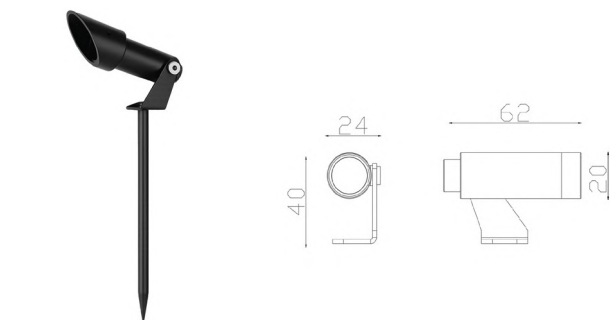


Wattage	Beam angle
2.5 W	20° 40°
Colors Temperature	Lumen Output
3000k	90 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum



Projector Sylune

Adjustable, Surface Mounted

ACU OP 252502M

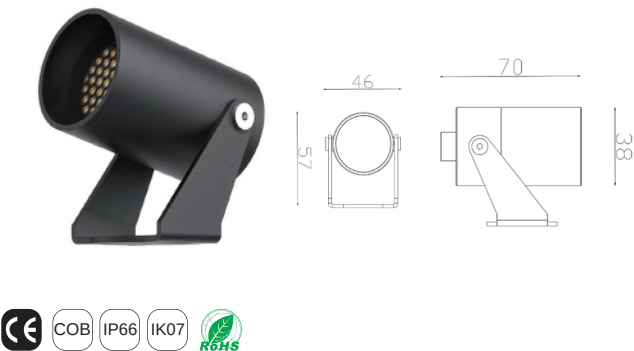

Wattage	Beam angle
5 W	15° 20° 40°
Colors Temperature	Lumen Output
3000k	218 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum

Projector Sylune

Adjustable, Planted

ACU OP 252502S



Wattage	Beam angle
5 W	15° 20° 40°
Colors Temperature	Lumen Output
3000k	218 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum






Projector Sylune

Adjustable, Surface Mounted

ACU OP 252503M

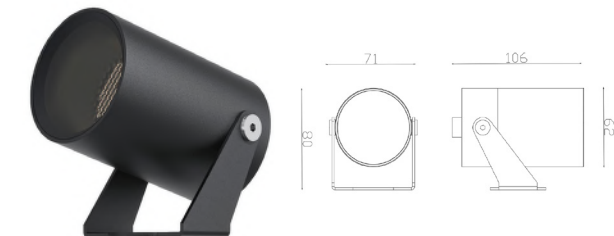


Wattage	Beam angle
12 W	15° 30° 40°
Colors Temperature	Lumen Output
3000k	612 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum

Projector Sylune

Adjustable, Planted

ACU OP 252503S

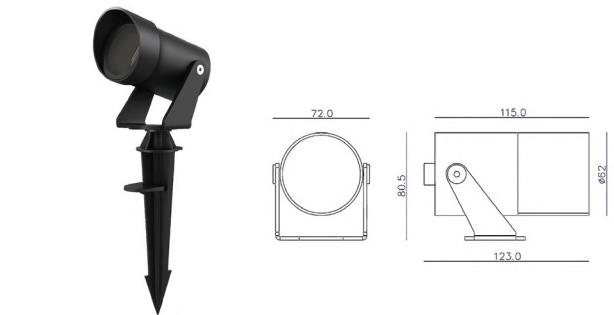


Wattage	Beam angle
12 W	15° 30° 40°
Colors Temperature	Lumen Output
3000k	612 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum



Projector Sylune

Adjustable, Surface Mounted

ACU OP 252504M

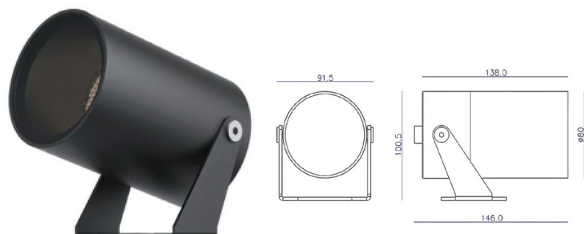


Wattage	Beam angle
16 W	15° 20° 30° 40°
Colors Temperature	Lumen Output
3000k	855 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum

Projector Sylune

Adjustable, Planted

ACU OP 252504S

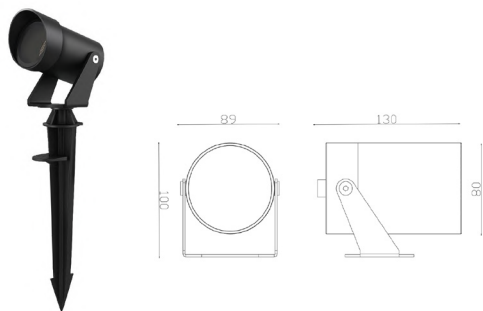

Wattage	Beam angle
16 W	15° 20° 40°
Colors Temperature	Lumen Output
3000k	855 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥90	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum






SYLIGHT

Sylight is the second locked projector branch in your outdoor structure. It belongs to the same projector family described as durable outdoor spotlights for gardens, trees, and plants.

Projector Sylight

Adjustable, Surface Mounted

ACU OP 211003M




Wattage	Beam angle
6 W	15° 40°
Colors Temperature	Lumen Output
3000k	540 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥82	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum

Projector Sylight

Adjustable, Planted

ACU OP 211003S




Wattage	Beam angle
6 W	15° 25° 40°
Colors Temperature	Lumen Output
3000k	540 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥82	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum



Projector Sylight

Adjustable, Surface Mounted

ACU OP 211101M

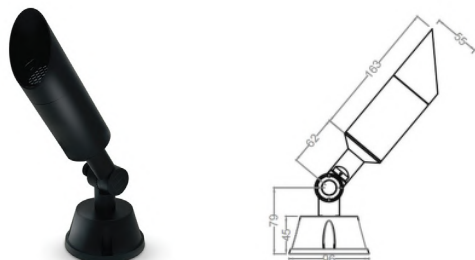

Wattage	Beam angle
12 W	15° 40°
Colors Temperature	Lumen Output
3000k	1080 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥82	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum

Projector Sylight

Adjustable, Planted

ACU OP 211101S



Wattage	Beam angle
12 W	15° 40°
Colors Temperature	Lumen Output
3000k	1080 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥82	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum






Projector Sylight

Adjustable, Surface Mounted

ACU OP 211102M




Wattage	Beam angle
16 W	15° 40°
Colors Temperature	Lumen Output
3000k	1440 Lm
Installation	Rated life hours
Surface Mounted	30000-50000H
CRI	Colors
≥82	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum

Projector Sylight

Adjustable, Planted

ACU OP 211102S



Wattage	Beam angle
16 W	15° 40°
Colors Temperature	Lumen Output
3000k	1440 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥82	■ Black
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum






Projector

Tree Ring

ACU OP 211000R

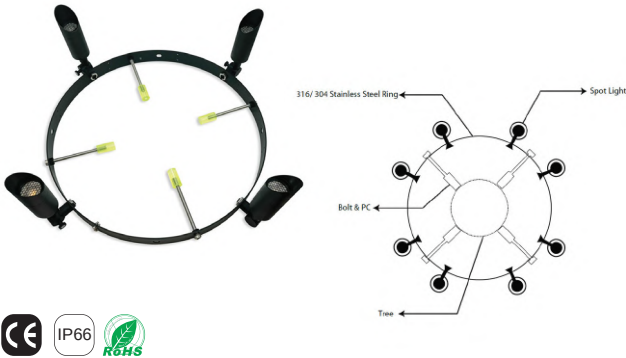

Tree Ring, Used with Tree light projectors

Diameter

600mm





BOLLARD

COLLECTION

Bollard is a dedicated outdoor lighting family, designed for pathway and low-level illumination. Positioned as the primary upright guidance solution within the outdoor range, it combines clarity, durability, and functional performance, while adding a refined touch to the landscape.

Bollard

Floor Mounted

ACU OB 182072



Wattage	Beam angle
7 W	120°
Colors Temperature	Lumen Output
3000k	800 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V VAC (Via the Built In Driver)	Powder Coated Aluminum + PC

ACU OB 182073-1



Wattage	Beam angle
7 W	Asymmetric
Colors Temperature	Lumen Output
3000k	-
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum + PC



Bollard

Floor Mounted

ACU OB 182073-2



Wattage	Beam angle
7 W	Asymmetric
Colors Temperature	Lumen Output
3000k	-
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum + PC

ACU OB 182073-3



Wattage	Beam angle
7 W	Asymmetric
Colors Temperature	Lumen Output
3000k	-
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum + PC





UJEN

Bollard


Floor Mounted

ACU OB 182075-1



Wattage	Beam angle
84x0.1 W	360°
Colors Temperature	Lumen Output
3000k	497 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum & Glass

ACU OB 182075-2

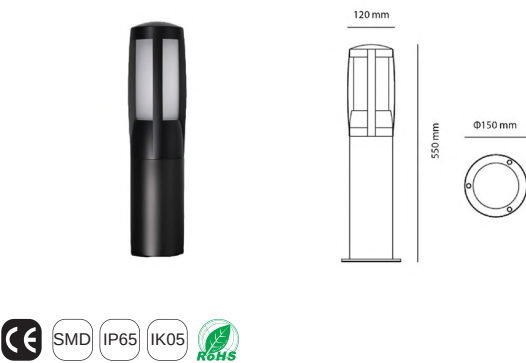


Wattage	Beam angle
84x0.1 W	360°
Colors Temperature	Lumen Output
3000k	497 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum & Glass



Bollard


Floor Mounted

ACU OB 182075-2

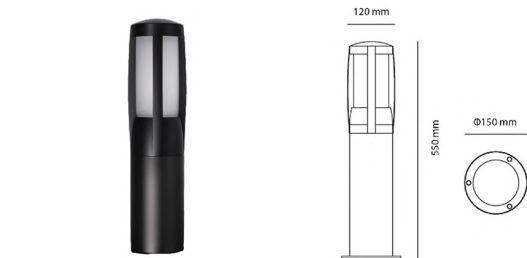

Wattage	Beam angle
84x0.1 W	360°
Colors Temperature	Lumen Output
3000k	497 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum & Glass

ACU OB 252072S

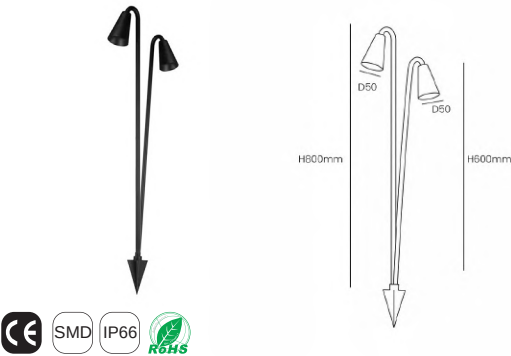

Wattage	Beam angle
2x6 W	60°
Colors Temperature	Lumen Output
3000k	960 Lm
Installation	Rated life hours
Planted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
24V DC (Via the External Driver)	Powder Coated Aluminum






Bollard


Floor Mounted

ACU OB 267071



Wattage	Beam angle
12 W	120°
Colors Temperature	Lumen Output
3000k	1020 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum

ACU OB 267072




Wattage	Beam angle
12 W	120°
Colors Temperature	Lumen Output
3000k	1020 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum



Bollard

Floor Mounted

ACU OB 267073



Wattage	Beam angle
24x0.25 W	360°
Colors Temperature	Lumen Output
3000k	214 Lm
Installation	Rated life hours
Floor Mounted	30000-50000H
CRI	Colors
≥80	■ Black ■ Grey
Input Voltage	Materials
220V AC (Via the Built In Driver)	Powder Coated Aluminum




UNDERWATER LIGHTING



The Underwater Collection is created for pools, water features, fountains, and submerged architectural details where light becomes part of the water experience itself. Designed to perform in wet and underwater environments, these fixtures add depth, movement, reflection, and visual drama to water surfaces.

From underwater spotlights and linear lights to flexible neon effects, this collection transforms water into an illuminated design element enhancing both atmosphere and safety.

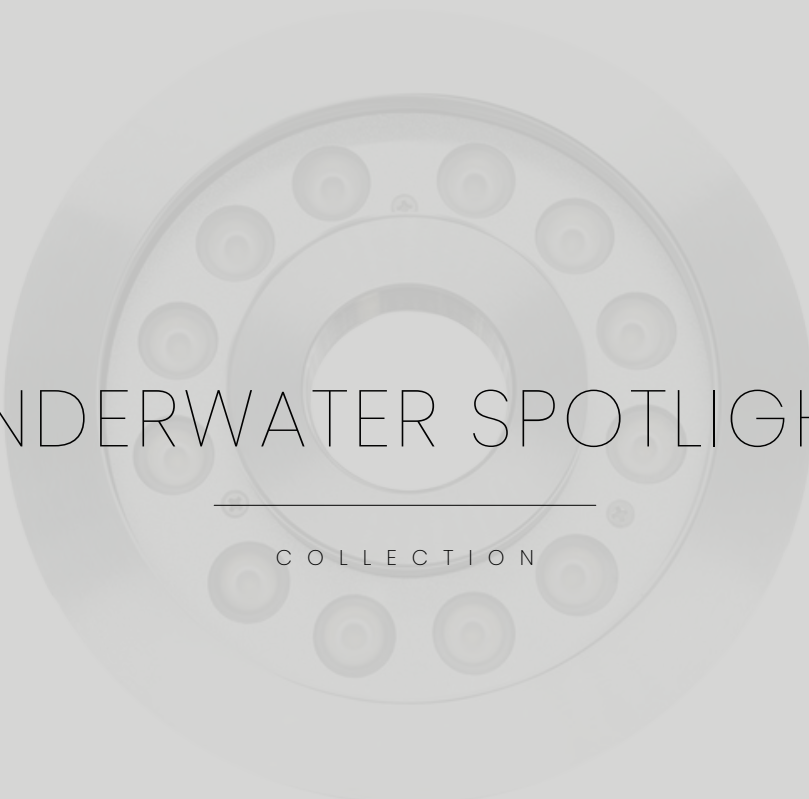

UNDERWATER SPOTLIGHT


C O L L E C T I O N

Underwater Spotlight is the core underwater spotlight family within the outdoor range, designed for aquatic environments such as residential pools, commercial aquariums, marine research facilities, and underwater landscapes. It emphasizes durable materials, sealed housing, and resistance to water pressure and harsh conditions.

Underwater Spotlight


Recessed

ACU UW 268001

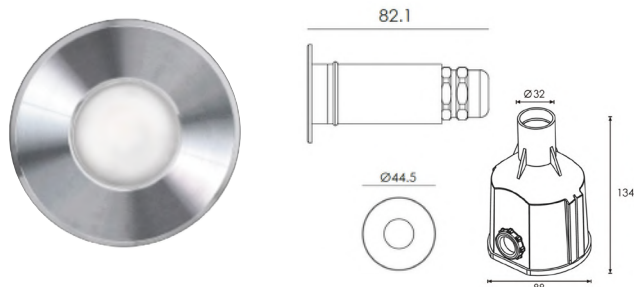

Wattage	Beam angle
2 W	10° 15° 30°
Colors Temperature	Lumen Output
3000k	≈185 Lm
Installation	Rated life hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Materials
24V DC (Via the External Driver)	Molding Shaped SUS 316 Stainless Steel Housing

ACU UW 268002

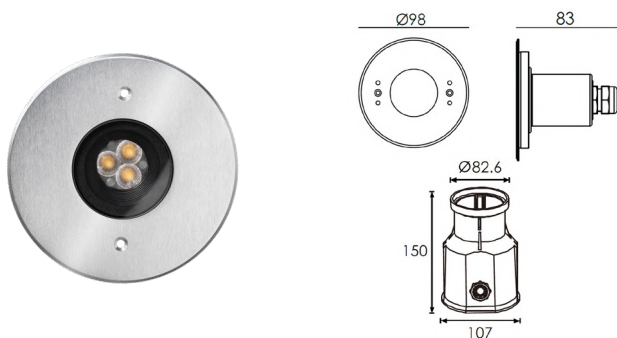


Wattage	Beam angle
3x2 W	15° 30°
Colors Temperature	Lumen Output
3000k	≈443 Lm
Installation	Rated life hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Materials
24V DC (Via the External Driver)	Hard Chromeplated Molding Shaped SUS 316L Stainless Steel Housing



Underwater Spotlight

Recessed

ACU UW 268003

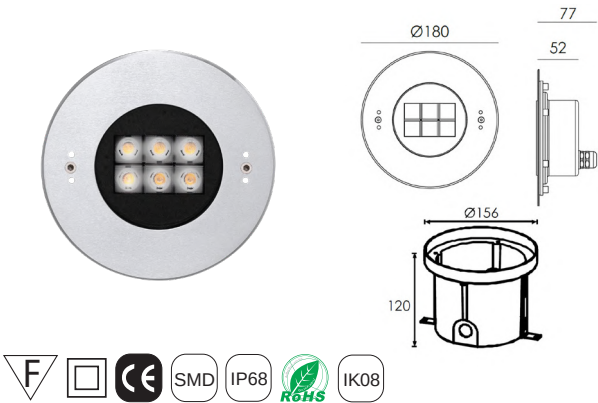

Wattage	Beam angle
6x2 W	10° 15° 30° 50°
Colors Temperature	Lumen Output
3000k	≈1230 Lm
Installation	Rated life hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Materials
24V DC (Via the External Driver)	Hard Chromeplated Molding Shaped Stainless Steel SUS 316L Housing

ACU UW 268004



Wattage	Beam angle
20x1.8 W	20° 35° 50°
Colors Temperature	Lumen Output
3000k	≈3336 Lm
Installation	Rated life hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Materials
24V DC (Via the External Driver)	Hard Chromeplated Molding Shaped Stainless Steel SUS 316L Housing






Underwater Spotlight

Fountain

ACU UW 268006

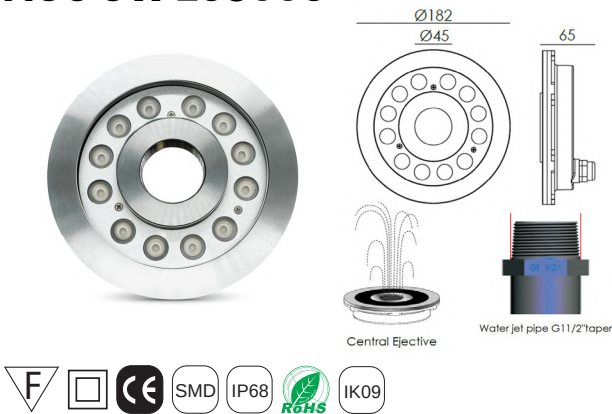

Wattage	Beam angle
12x2 W	6° 13° 20° 30° 40°
Colors Temperature	Lumen Output
3000k	≈2062 Lm
Installation	Rated life hours
Recessed	30,000 – 50,000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Materials
24V DC (Via the External Driver)	Hard Chromeplated Molding Shaped Stainless Steel SUS 316 Housing

Underwater Spotlight

Projector – Floor Mounted

ACU UW 268007




Wattage	Beam angle
3.6 W	30°
Colors Temperature	Lumen Output
3000k	≈322 Lm
Installation	Rated life hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Materials
24V DC (Via the External Driver)	Hard Chromeplated Molding Shaped Stainless Steel SUS 316L Housing



Underwater Spotlight


Floor Mounted

ACU UW 268008



Wattage	Beam angle
1x9 W	15° 35° 45° 60°
Colors Temperature	Lumen Output
3000k	≈1182 Lm
Installation	Rated life hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Materials
24V DC (Via the External Driver)	Hard Chromeplated Molding Shaped Stainless Steel SUS 316L Housing

ACU UW 268009



Wattage	Beam angle
3x5.5 W	9° 15° 30° 45° 60°
Colors Temperature	Lumen Output
3000k	≈1575 Lm
Installation	Rated life hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Materials
24V DC (Via the External Driver)	Hard Chromeplated Molding Shaped Stainless Steel SUS 316L Housing



Underwater Spotlight

Floor Mounted

ACU UW 268010



Wattage	Beam angle
6x4.5 W	9° 15° 30° 45° 60°
Colors Temperature	Lumen Output
3000k	≈2908 Lm
Installation	Rated life hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Materials
24V DC (Via the External Driver)	Hard Chromeplated Molding Shaped Stainless Steel SUS 316L Housing

Underwater Spotlight

Wall Mounted

ACU UW 268012



Wattage	Beam angle
4x3 W	24° 35° 50°
Colors Temperature	Lumen Output
3000k	≈1345 Lm
Installation	Rated life hours
Surface Mounted	30,000 – 50,000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Materials
24V DC (Via the External Driver)	Hard Chromeplated Molding Shaped Stainless Steel SUS 316L Housing







UNDERWATER LINEAR


COLLECTION

Underwater Linear is the linear branch of your locked underwater range, intended for continuous underwater lighting expressions where a point source is not enough. In your locked structure, it stands as its own product identity inside the underwater group.

Underwater Linear

Recessed

ACU UW 268005

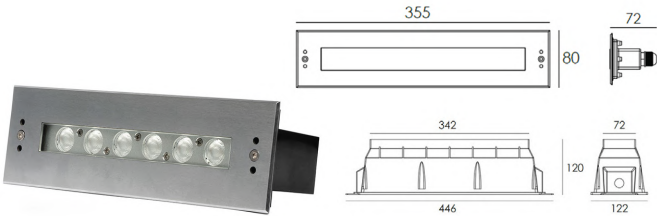

Wattage	Beam angle
6x3 W	15° 30° 45°x35°
Colors Temperature	Lumen Output
3000k	≈1625 Lm
Installation	Rated life hours
Recessed	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Materials
24V DC (Via the External Driver)	Hard Chromeplated Molding Shaped Stainless Steel SUS 316L Housing

Underwater Linear

Floor Mounted

ACU UW 268011



Wattage	Beam angle
6x3 W	15° 30°
Colors Temperature	Lumen Output
3000k	≈1625 Lm
Installation	Rated life hours
Surface Mounted	30,000 - 50,000H
CRI	Colors
≥90	■ Chrome finish
Input Voltage	Materials
24V DC (Via the External Driver)	Hard Chromeplated Molding Shaped Stainless Steel SUS 316L Housing





Underwater NEON FLEX


C O L L E C T I O N

Underwater Neon Flex is the flexible underwater light family in your locked structure. The catalogue shows both side-bend and top-bend executions, designed for submerged continuous lighting with sealed silicone-based construction and IP68 protection.

Underwater Neon Flex


Flexible Surface Mounted – Side Bend

ACU UW 202900S

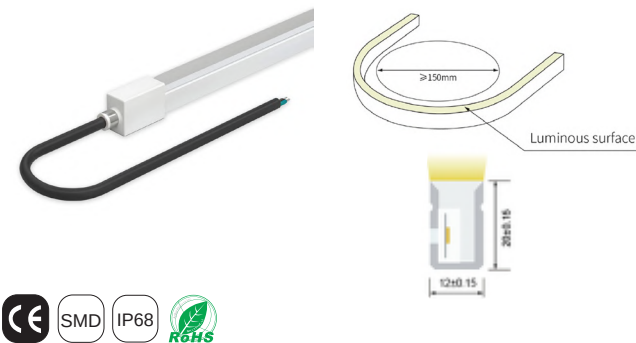

Wattage	Beam angle
5 W/m	120°
Colors Temperature	Lumen Output
3000k	136 Lm/m
Installation	Rated life hours
Neon Flex Accessories	30000-50000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Dow Chemical Silastic ET-702I & Silicone Rubber

ACU UW 202901S

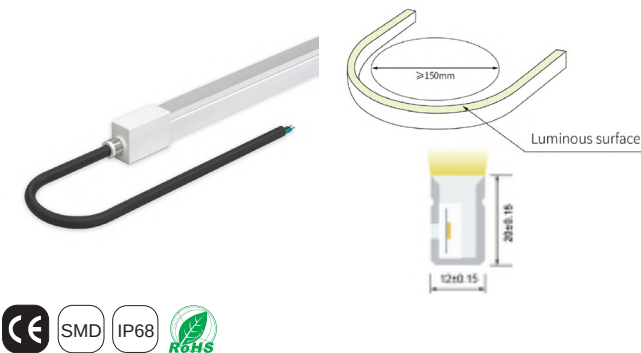

Wattage	Beam angle
10 W/m	120°
Colors Temperature	Lumen Output
3000k	285 Lm/m
Installation	Rated life hours
Neon Flex Accessories	30000-50000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Dow Chemical Silastic ET-702I & Silicone Rubber






Underwater Neon Flex

Flexible Surface Mounted – Side Bend

ACU UW 202902S

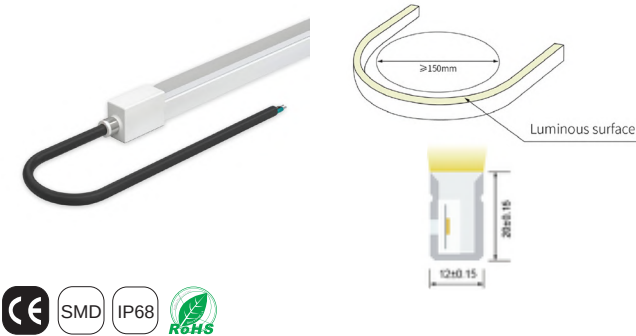


Wattage	Beam angle
15 W/m	120°
Colors Temperature	Lumen Output
3000k	448 Lm
Installation	Rated life hours
Neon Flex Accessories	30000-50000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Dow Chemical Silastic ET-702I & Silicone Rubber

Underwater Neon Flex

Top Bend

ACU UW 202900T

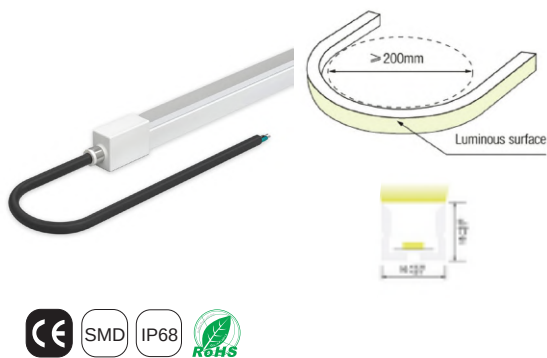


Wattage	Beam angle
5 W/m	120°
Colors Temperature	Lumen Output
3000k	205 Lm
Installation	Rated life hours
Neon Flex Accessories	30000-50000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Dow Chemical Silastic ET-702I & Silicone Rubber



Underwater Neon Flex


Flexible Surface Mounted -Top Bend

ACU UW 202901T

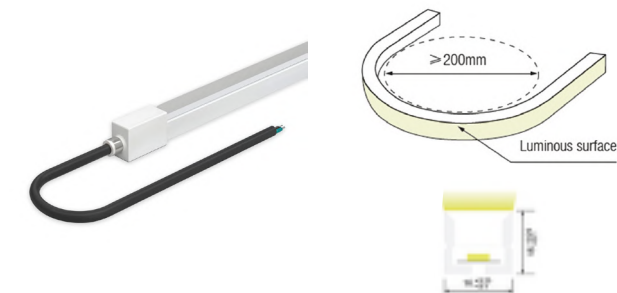

Wattage	Beam angle
10 W/m	120°
Colors Temperature	Lumen Output
3000k	375 Lm
Installation	Rated life hours
Neon Flex Accessories	30000-50000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Dow Chemical Silastic ET-702I & Silicone Rubber

ACU UW 202902T

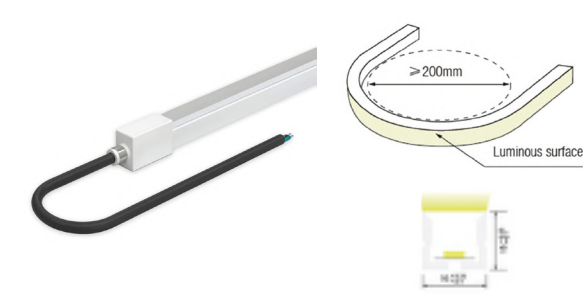

Wattage	Beam angle
15 W/m	120°
Colors Temperature	Lumen Output
3000k	615 Lm
Installation	Rated life hours
Neon Flex Accessories	30000-50000H
CRI	Colors
≥90	☐ White
Input Voltage	Materials
24V DC (Via the External Driver)	Dow Chemical Silastic ET-702I & Silicone Rubber





Instagram Facebook LinkedIn X @acumenlight

ACUMEN LIGHT EXPERIENCE HOUSE

Jumeirah Lakes Towers, Cluster F, Indigo Icon Tower,
1403-1404 Office, Dubai, United Arab Emirates
Tel. +971 4 557 6933 / Whatsapp. +971 50 159 4577

ACUMEN LIGHT OPERATION CENTER

First Al Khail St, Al Quoz, Al Quoz Industrial Area 3,
Dubai, United Arab Emirates, Tel. +971 4 252 9155